HEAVY-DUTY CIRCULAR SAWS WITH REAR PIVOT DEPTH OF CUT & ELECTRIC BRAKE

DW364 - 7¼" | DW384 - 8¼"

- 5,800 RPM • 15.0 Amp
- 2,075W maximum watts out
- Rear pivot depth of cut adjustment allows your hand to remain behind the tool at all depth of cuts
- 50° beveling capacity increases capacity in various applications
- 100% ball and roller bearings
- 1-1/2" edge distance from end of shoe to blade matches dimensional lumber thickness
- Both models include 24T carbide tipped blade & blade wrench

HEAVY-DUTY 7¼" LIGHTWEIGHT CIRCULAR SAW KIT WITH HIGH STRENGTH BASE

DW369CSK

- 5,800 RPM
- 15.0 Amp, 2,200W maximum watts out
- Innovative new high strength base will withstand a 1 story drop
- 56° beveling capacity with stops at 45° and 22-1/2° allows for aggressive bevel cuts while allowing user to locate common angles quickly
- Electric brake stops blade after use
- Lower guard design improves performance when making bevel cuts and cutting shims
- Includes: 24T carbide tipped blade, blade wrench & heavy-duty kit box

HEAVY-DUTY 7¼" HIGH-TORQUE FRAMING SAW

DW378G

- 4,600 RPM
- 15.0 Amp, 2,000W maximum watts out
- 100% ball and roller bearings
- 50° bevel capacity increases range of applications
- High-strength cast aluminum base provides superior durability
- Lower guard improves performance when making bevel cuts and cutting shims
- 1-1/2" edge distance from end of base to blade matches dimensional lumber thickness
- Includes: 24T carbide tipped blade, grounded plug & blade wrench

HEAVY-DUTY 14" MULTI-CUTTER™ SAW

DW872

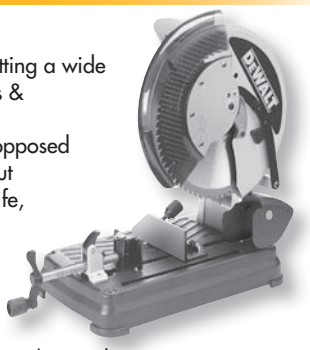

- 4.0 HP; 15.0 Amp; 1,300 RPM
- Multi-Cutter™ offers versatility by cutting a wide variety of materials including ferrous & non-ferrous metals
- Utilizing a carbide tipped blade as opposed to an abrasive wheel, the depth of cut remains constant throughout blade life, eliminating the need for frequent wheel changes associated with abrasive wheel cutting
- Multi-Cutter™ cuts 4 times faster than chop saws and 8 times faster than portable band saws in 2" x 2" x 1/4" angle iron
- 14" 70 tooth carbide tipped blade delivers a lower cost-per-cut compared to abrasive wheels
- Includes: 14" carbide tipped blade, wrench & vertical clamp

HEAVY-DUTY 14" CHOP SAW

D28715

- 5.3 HP; 15 Amp; 3,800 RPM
- Patented tool-free, 45° adjustable fence for fast and accurate angle cuts without using a wrench
- Large cutting capacity (5" round / 4-1/2" x 6-1/2" rectangle) provides the ability to cut a wide variety of materials
- Includes: 14" abrasive wheel and tool-free blade change

Also Available: Model D28700

- 14" Blade, 4.0 HP; 15 Amp; 3,800 RPM
- Cutting Capacity: 4-1/2" round and 4-3/4" x 5-1/3" rectangle

TYPE 1 STUD CUTTER CHOP SAW WHEEL

DW8003

- 14" diamond; 1" arbor
- Double reinforced with two full sheets of fiberglass for safety and performance
- Premium grain for added wheel life and speed
- High quality resin bonds that are 100% inspected before use for product consistency and quality

SERIES 20® CONSTRUCTION CARBIDE TIPPED FRAMING SAW BLADE

DW3578

- 24 carbide teeth; 7-1/4" diameter; 5/8" round diamond arbor
- Tougher tungsten carbide stays sharper longer
- Anti-stick coating reduces friction and gum-up
- Thin .071 kerf for smoother cutting

DEWALT

KASS INDUSTRIAL SUPPLY CORP.

10" SINGLE BEVEL MITER SAW

DW713

- 15 Amp; 5,000 RPM
- Stainless steel detent plate with 11 positive stops
- Tall sliding fences support crown molding vertically 4–1/2"
- Cam miter lock for quick and accurate miter table positioning
- Miter detent override for fine adjustment and precise miter angles
- 0-50° left and right miter capacity for greater versatility
- Bevels 3°–48° for increased cut capacity
- Designed for use with the DWS7085 LED worklight or DW7187 miter saw laser system

HEAVY-DUTY 12" COMPOUND MITER SAW

DW715



- 15 Amp, 4,000 RPM
- Adjustable stainless steel miter detent plate with 11 positive stops
- Tall sliding fence supports crown molding up to 5-1/4" and base molding up to 6-1/2"
- Bevels 0°-48° to the left and 0°-3° to the right for increased capacity
- 0°-50° left and right miter capacity for greater versatility
- 4 Hardened Steel Bevel Stops at 0°, 33.9°, 45° and 48°
- Includes: carbide blade, extension kit, dust bag and blade wrench

HEAVY-DUTY 12" DOUBLE-BEVEL COMPOUND MITER SAW

DW716

- 15 Amp; 3,600 RPM
- Adjustable stainless steel miter detent plate with 11 positive stops
- Tall sliding fence supports crown molding up to 5-1/4" and base molding up to 6-1/2"
- Double bevel design allows saw to bevel left and right 0° - 48° with positive stops at 0°, 33.9°, 45° and 48°
- Cuts 2 x 10 dimensional lumber at 90° and 2 x 8 at 45°
- 0°-50° left and right miter capacity for greater versatility
- Includes: carbide blade, dust bag and blade wrench

HEAVY-DUTY 12" DOUBLE-BEVEL SLIDING COMPOUND MITER SAW

DW718



- 15 Amp; 3,600 RPM
- Adjustable stainless steel miter detent plate with 10 positive stops
- Tall sliding fence supports crown molding up to 6-5/8" and base molding up to 6-1/2"
- Single lever action double bevel design easily bevels left and right 0° - 48° with positive stops at 0°, 22.5°, 33.9° and 45°
- Cuts up to 2 x 16 dimensional lumber at 90° and 2 x 12 at 45°
- Miters 60° to the left and 50° to the right provides increased capacity
- Includes: carbide blade, blade wrench, dust bag and vertical material clamp

MITER SAW LASER SYSTEM

Designed for use on DW715, DW716 and DW718 miter saws only

DW7187

- Enhanced visibility in low and high light locations
- Laser line adjusts to the left or right side of blade
- Operational with or without blade spinning
- Upper guard mount allows visibility throught entire range of motion
- Powered by the saw without batteries and installs in about 10 minutes
- Includes: power supply, laser module and adjustment wrenches

HEAVY-DUTY 10" PORTABLE TABLE SAW WITH STAND

DW744S

- 15.0 Amp; 3,650 RPM
- Exclusive, telescoping fence delivers 24-1/2" rip capacity
- 3-1/8" depth of cut at 90° and 2-1/4" at 45°
- 26-1/2" x 19-1/4" table surface
- Includes: 10" 24-tooth SERIES 20™ carbide blade, portable table saw stand & miter gauge

COMPACT TABLE SAW WITH ROLLING STAND

DW744XRS

- 15.0 Amp; 3,650 RPM
- 26-1/2" X 19-1/4" table surface
- 3-1/8" depth of cut at 90° and 2-1/4" at 45°
- Telescoping fence delivers 24-1/2" rip capacity
- Rack and pinion fence rails for fast adjustments
- Power to cut PT lumber and hardwoods
- Electronic feedback maintains blade speed during difficult applications
- 2" Dust Collection Port easily connects to a vacuum
- Includes: 10" 24-tooth carbide blade, rolling table saw stand, miter gauge and push stick

Toll Free to Bronx, New York 800-255-0910

HEAVY-DUTY RECIPROCATING SAW KIT

DW311K

- 13 Amp;0-2,700 SPM
- 1-1/8" stroke length for fast and efficient cutting
- Keyless blade clamp for quick and easy blade changes
- Keyless adjustable shoe easily adjusts depth of cut
- Variable speed control dial matches correct speed for the application
- Anti-slip comfort grip handle for increased comfort
- Includes: metal cutting blade and heavy-duty kit box

HEAVY-DUTY RECIPROCATING SAW KIT

DW304PK

- 10.0 Amp; 0-2,800 SPM
- Lever-action keyless blade clamp for quick and easy blade changes without touching any hot blades
- 17.5" in length
- 1-1/8" stroke length for improved cutting performance and speed
- 100% ball and roller bearings for increased tool life and cutting performance
- Includes: metal cutting blade & heavy-duty kit box

HEAVY-DUTY COMPACT JIGSAW KIT

DW317K

- 5.5 Amp; 0 - 3,100 SPM
- 4-position orbital action allows for faster, more aggressive cuts in a variety of materials
- Shoe bevels 0° to 45° for beveled cuts
- Keyless blade clamp for fast, easy blade installation and removal
- All metal gear case provides superior durability
- Includes: (1) blade and heavy-duty kit box

HEAVY-DUTY VARIABLE SPEED TOP-HANDLE JIGSAW

DW331K

- Powerful 6.5 Amp motor for the most demanding materials
- 500-3,100 SPM delivers optimal cutting speed
- 4-position orbital action for faster, more aggressive cuts
- Lever-action keyless blade change for fast, easy replacement
- Innovative flush cutting blade system for flush cuts without up cutting
- Extra-large rubber grip dampens vibration and provides comfort
- Integrated dust blower maintains visibility of cut line
- Non-marring shoe cover protects soft or glossy materials
- Includes: blades and heavy-duty kit box

HEAVY-DUTY 4½" SMALL ANGLE GRINDER

D28112

- 10.0 Amp AC/DC
- 11,000 rpm; 1,200 Max Watts Out
- Dust Ejection System™ ejects dust particles that enter the tool through the air intake vents
- Quick-change wheel release for quick wheel removal without a wrench
- Keyless adjustable guard provides tool free guard adjustment
- Includes: 2-position side handle, depressed center wheel, keyless adjustable guard and wrench

HEAVY-DUTY 9" LARGE ANGLE GRINDERS

D28493N — 5,000 RPM

D28494N — 6,000 RPM

- 15.0 Amp AC/DC
- 3,084W max. watts out
- Keyless adjustable guard allows for guard adjustments to be made without tools
- 5 position side handle provides improved ergonomics for specific applications
- 2 wire double insulated 'S' jacket rubber cord provides increased durability and life in hot & cold climates
- Both models includes 9" guard & side handle

HEAVY-DUTY 5" RANDOM ORBIT SANDER

D26451

- 3.0 Amp; 12,000 OPM
- Textured anti-slip top & body grip for comfort and control
- Controlled Finishing System® maintains pad speed and minimizes gouging during start up
- Dual-plane counter-balanced fan reduces user fatigue
- Sealed 100% ball-bearing construction provides longer life
- Accepts 5", 8-hole hook & loop paper
- Includes: high capacity dust bag and vacuum adapter

HEAVY-DUTY PLATE JOINER KIT

DW682K

- 6.5 Amp; 10,000 RPM
- Dual rack and pinion fence ensures blade & fence are always parallel
- 45° locating notch in fence allows indexing off the outside surface of a mitered joint
- Non-marring aluminum shoe allows joiner to be clamped for stationary work
- Includes: carbide blade, dust bag, vacuum adapter, Torx® key, wrench & heavy-duty kit box

DEWALT

KASS INDUSTRIAL SUPPLY CORP.

DRYWALL SCREWDRIVER

DW252

- 6.0 Amp
- 0-4,000 RPM
- Depth-sensitive "set and forget" nosepiece for consistent fastener depth
- Two-finger trigger for increased comfort
- Hi-speed transmission for production drywall hanging
- Helical-cut steel, heat treated gears for long life and durability

HEAVY-DUTY VSR DRYWALL SCREWDRIVER

DW272

- 6.3 Amp
- 0-5,300 RPM
- Depth-sensitive "set and forget" nosepiece for consistent fastener depth
- Metal gear housing for increased durability
- Rubber grip and two-finger trigger for increased comfort
- Helical-cut steel, heat treated gears for long life and durability

HEAVY-DUTY VSR DRYWALL / FRAMING SCREWDRIVER

DW276

- 6.5 Amp
- 0-2,500 RPM
- Metal gear housing for increased durability
- Depth-sensitive "set and forget" nosepiece for consistent fastener depth
- Rubber grip and two-finger trigger for increased comfort
- High torque for deck building and heavy gauge steel stud framing
- Helical-cut steel, heat treated gears for long life and durability

HEAVY-DUTY VSR DEPTH-SENSITIVE SCREWDRIVER

DW266

- 6.5 Amp
- 0-2,500 RPM
- Ideal for use with TEKS® screws
- Depth-sensitive "set and forget" nosepiece for consistent fastener depth
- Rubber grip and two-finger trigger for increased comfort
- Metal gear housing for increased durability
- Helical-cut steel, heat treated gears for long life and durability

HEAVY-DUTY VSR VERSA-CLUTCH® SCREWDRIVER

DW268

- 6.5 Amp
- 0-2,500 RPM
- VERSA-CLUTCH® torque adjustment system to "dial" the proper torque needed to efficiently drive fasteners without stripping or breaking fastener with override capability
- Rubber grip and two-finger trigger for increased comfort
- Helical-cut steel, heat treated gears for long life and durability

HEAVY-DUTY 3 HP ELECTRONIC VARIABLE SPEED PLUNGE ROUTER

DW625

- 15.0 Amp •8,000-22,000 RPM
- Rack and pinion depth adjuster, magnified scale and micro-fine bit depth adjuster provides fast and accurate depth settings
- Phosphorous bronze bushings provides a smooth and accurate plunge
- Guide Bushing adapter plate accepts standard guide bushings for template work
- One piece motor shaft and spindle ensures perpendicularity and accuracy
- Includes: 1/4" collet, 1/2" collet, dust extraction adapter, template guide bushing adapter & wrench

HEAVY-DUTY CUT-OUT TOOL

DW660

- 30,000 RPM
- 5.0 Amp
- Turn-on/off bump-off switch allows users to easily shut tool off
- Dust-sealed switch provides durability and long switch life
- Slim body design for less fatigue over prolonged use
- Jampot construction provides jobsite durability

Toll Free to Bronx, New York 800-255-0910

HEAVY-DUTY 3/8" VSR RIGHT ANGLE DRILL

DW160V

- 3.7 amp
- 100% ball-bearing construction
- Compact design for easy access in tight places
- Paddle switch is ideal for use in awkward positions
- Shielded chuck protects user and improves grip in confined areas
- Double gear reduction increases torque performance and decreases gear stress

HEAVY-DUTY 1/2" STUD & JOIST DRILL

DW124K

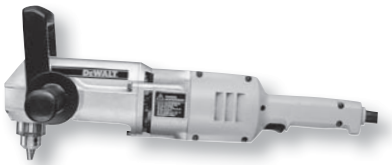

- 8.0 Amp • 300-1,200 RPM • 100% ball-bearing
- Adjustable front handle and two position side handle provide maximum leverage and control
- Triple gear reduction provides increased torque and reduces gear stress
- Includes: chuck key with holder, bail handle & 2-position side handle & heavy-duty kit box

1/2" SPADE HANDLE DRILL

DW130V

- Variable speed reversible switch
- Increased torque for drilling and mud mixing
- Weighs just 7.5 lbs. for decreased user fatigue
- Soft grip handle and 2-position rear spade handle
- 3-position side handle provides greater control
- Includes: chuck key with holder

HEAVY-DUTY 3/8" VSR DRILL

DW223G

- 7.0 Amp; 0-1,200 RPM
- 3-wire grounded plug/cord
- Helical-cut steel, heat-treated gears for increased durability and long gear life
- DIN nose for side handle or rig mount
- Two-finger rubber trigger for increased comfort
- Metal gear housing for jobsite durability and increased reliability
- Includes: chuck key with holder

HEAVY-DUTY 1/2" VSR DRILL

DW235G

- 7.8 Amp; 0-850 RPM
- Helical-cut steel, heat-treated gears for increased durability and long gear life
- 360° side handle for greater control
- 2-finger rubber trigger for increased comfort
- Metal gear housing for jobsite durability and increased reliability
- Includes: 360° side handle & chuck key with holder

HEAVY-DUTY 3/8" VSR DRILL

D21002

- 7.0 Amps; 0-2,500 RPM • 480W max. watts out
- All ball-bearing construction provides greater durability and longer tool life
- Contoured textured handle provides better gripping surface and reduces user fatigue
- Built-in two-way level for drilling accurate vertical and horizontal holes
- Glass-filled nylon housing is durable, impact resistant and provides lower maintenance cost
- Belt clip conveniently holds tool and frees user's hands for other work
- Includes: chuck key with holder

3/8" VSR PISTOL GRIP DRILL WITH KEYLESS CHUCK

DWD112

- 7.0 Amps; 0-2,500 RPM; 650W max watts out
- VSR trigger for versatility in drilling and fastening applications
- 3/8" all-metal ratcheting keyless chuck for greater bit retention
- Soft grip handle design offers increased gripping surface and comfort
- All ball-bearing construction provides greater durability and longer tool life

DEWALT

KASS INDUSTRIAL SUPPLY CORP.

1" L-SHAPE THREE MODE SDS HAMMER

D25313K

- L-Shape Design offers superior balance and control
- 2.5 ft-lbs of impact energy provides fast drilling and powerful chipping
- 8.0 Amp motor provides high performance and overload protection
- Compact at only 11-1/2" this hammer allows users to get into tight spaces
- Light weight design (6.5 lbs) provides comfort for extended use
- Allows the use of the D25300D dust collection system
- Chipping (hammer-only) mode allows user to perform light chipping applications

HEAVY-DUTY 1 9/16" SPLINE ROTARY HAMMER KIT

D25550K

- 11.0 Amp
- 140-280 RPM; 1,330-2,660 BPM
- Spline toolholder is compatible with most bits
- 7.3 ft/lbs of impact energy delivers up to 42% faster drilling and chipping applications
- Includes: 360° side handle, depth rod & heavy-duty kit box

HEAVY-DUTY 1 3/4" SDS MAX ROTARY HAMMER KIT

D25600K

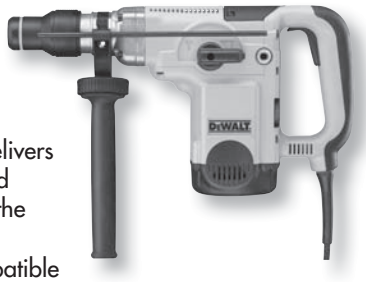

- 11.5 Amp
- No load speed 140-280 RPM; loaded speed 1,330-2,660 BPM
- 8 ft/lbs of impact energy delivers up to 42% faster drilling and chipping applications than the competition
- SDS max toolholder is compatible with most bits
- Includes: 360° side handle, depth rod & heavy-duty kit box

HEAVY-DUTY 1/2" VSR DUAL RANGE HAMMERDRILL

DW505

- 7.8 Amp
- 0-1,100/0-2,700 RPM
- 0-19,000/0-46,000 BPM
- High/low speed for high speed drilling or high torque applications
- Dual mode: hammerdrill/drill for wood, steel or masonry applications
- Includes: 360° side handle, depth rod & chuck key with holder

22 LB. SDS MAX DEMOLITION HAMMER WITH SHOCKS

D25901K

- 14.0 Amp; 1,020-2,040 BPM
- Active Vibration Control AVC™ reduces vibration for less user fatigue

- Variable impact control dial with 19 settings
- One-step chisel rotation with12 positions accurately adjusts the chisel, not the tool
- Variable position side handle allows 360° rotation and 150° adjustment
- Includes: 360° adjustable side handle and kit box

HEAVY-DUTY 1/2" IMPACT WRENCH

DW292

- 345 ft-lbs of deliverable torque in forward and reverse
- 1/2" detent pin anvil
- AC/DC forward/reverse rocking switch
- Soft grip handle for superior ergonomics
- Ball bearing construction for increased durability

Toll Free to Bronx, New York 800-255-0910

Headquarters

	BRONX New York	MAMARONECK New York	ISLANDIA Long Island	BENSALEM Pennsylvania
Ph:	718-299-6060	914-777-3245	631-234-0740	215 -244-1545
Fx:	718-299-1593	914-777-3875	631-234-0686	215-244-1082

18V XRP™ CORDLESS SELF-LEVELING INTERIOR LASER

DW079KI

- Fully automatic horizontal and vertical self leveling with out-of-level shutoff
- Multi-voltage adapter accepts all DEWALT® batteries 9.6V – 18V
- Wireless (IR) remote control operated scan mode creates a "laser chalkline" between two points for an extremely bright beam over long distances
- Remote control operation so that one person can set up and aim the laser over long distances
- Private mode option eliminates remote control interference between multiple rotary lasers on the jobsite
- Includes: 1 hour charger, 18V XRP™ battery, laser target card, wall mount, wireless (IR) remote control, laser enhancement glasses and kit box

1/4" 18V XRP™ CORDLESS IMPACT DRIVER KIT

DC825KA

- Frameless motor with replaceable brushes for extended tool durability and life
- Compact and lightweight design allows user to get into tight spaces
- 1,330 in.-lbs. of torque to perform a wide range of applications
- 0-2,400 rpm/0-2,700 ipm for faster application speed
- Textured ant-slip comfort grip provides maximum comfort and control
- Heavy-duty impact mechanism directs torque to fastener without kickback
- Includes: Includes: 1 hour charger, (2) 18V XRP™ batteries and kit box

1/2" 12V XRP™ CORDLESS DRILL/DRIVER KIT

DCD910KX



- Max RPM: 0-425 / 0-1,200 / 0-1,800
- High power motor delivers 285 unit watts out of max power
- XRP™ extended run-time batteries provide long run-time and battery life
- Patented 3-speed all-metal transmission matches the tool to task
- Heavy-duty 1/2" ratcheting chuck helps prevent bits from slipping
- LED worklight provides increased visibility in confined spaces
- Includes: 1 hour charger, (2) 12V XRP™ batteries and kit box

18V XRP™ CORDLESS DRYWALL/DECK SCREWDRIVER KIT

DC520KA

- Dual speed ranges (0-900/0-2,900 rpm); high speed for drywall, low speed for decking
- Depth sensitive "set and forget" nosepiece for consistent fastener depth
- DEWALT built high-performance motor with fan cooling delivers maximum power and durability
- Includes: 1 hour charger, (2) 18V XRP™ batteries, bit tip/magnetic holder, drywall nosepiece, TEKS® nosepiece and heavy-duty kit box

2 GALLON CORDLESS OR CORDED WET/DRY VAC

DC500

- Runs off of 12V-18V DEWALT battery packs or 120V AC
- Gore™ wet/dry filter traps 99.7% of drywall dust
- Wet/Dry filter eliminates change overs
- 5 ft. hose (1-1/4" dia.) and Washable filter
- On-board hose, cord and accessory storage
- Includes: heavy-duty rubber hose, crevice tool and wide nozzle

HEAVY-DUTY 18V CORDLESS 1/2 GALLON WET/DRY PORTABLE VAC

DC515K

- Dual Clean-up Modes allow for debris clean up with either the Front Utility Nozzle or Extendable Rubber Hose
- 1/2 Gallon Tank with Heavy Duty Latch is easy to empty and clean
- Gore™ HEPA Wet/Dry filter traps 99.97% of dust at 0.3 microns
- Washable filter- tap or water rinse to clean
- Heavy-duty rubber hose provides durability and flexibility
- Large On/Off Switch that is easy to access with one hand
- Runs off of 18V DEWALT battery packs for longer runtime

DEWALT

KASS INDUSTRIAL SUPPLY CORP.

1/2" 18V XRP™ CORDLESS HAMMERDRILL / DRILL / DRIVER KITS

DCD959KX: Delivers 420 UOW; Max RPM: 0-450 / 0-1,450 / 0-2,000
DCD950KX: Delivers 450 UOW; Max RPM: 0-500 / 0-1,250 / 0-2,000

- XRP™ extended run-time batteries provide long run-time and battery life
- Patented 3-speed all-metal transmission matches the tool to task
- Heavy-duty 1/2" self-tightening chuck tightens throughout operation
- Hammerdrill Mode delivers up to 34,000 BPM in max 3rd speed
- Both models include: 1 hour charger, (2) 18V XRP™ batteries, 360° side handle and kit box
- Model DCD950KX has LED worklight

DCD959KX
PISTOL GRIP DESIGN

DCD950KX
T-HANDLE DESIGN

1/2" 18V XRP™ CORDLESS DRILL / DRIVER KIT

DCD940KX

- Max RPM: 0-500 / 0-1,250 / 0-2,000
- High power motor delivers 450 unit watts out of max power
- Patented 3-speed all-metal transmission matches the tool to task
- Heavy-duty 1/2" ratcheting chuck and LED worklight
- Includes: 1 hour charger, (2) 18V XRP™ batteries, 360° side handle and kit box

XRP™ 18V HAMMERDRILL / CIRCULAR SAW COMBO KIT

DCK250X

Includes: DCD950 XRP™ 1/2" 18V hammerdrill/drill/driver, DC390 XRP™ 18V circular saw, 1 hour charger, (2) 18V XRP™ batteries, 360° side handle, carbide tipped blade and contractor bag

XRP™ 18V HAMMERDRILL / RECIPROCATING SAW COMBO KIT

DCK251X

Includes: DCD950 XRP™ 1/2" 18V hammerdrill/drill/driver, DC385 XRP™ 18V reciprocating saw, 1 hour charger, (2) 18V XRP™ batteries, 360° side handle and contractor bag.

XRP™ 18V CORDLESS 4-TOOL COMBO KIT

DCK450X

Includes: DCD950 XRP™ 18V 1/2" hammerdrill/drill/driver, DC390 XRP™ 18V circular saw, DC385 XRP™ 18V reciprocating saw, DW919 18V flexible floodlight, 1 hour charger, (2) 18V XRP™ batteries, 360° side handle, carbide tipped blade and kit box

XRP™ 18V CORDLESS 9-TOOL COMBO KIT

Includes: DCD950 XRP™ 1/2" 18V hammerdrill/drill/driver, DC390 XRP™ 18V circular saw, DC385 XRP™ 18V reciprocating saw, DW059 1/2" 18V high torque impact wrench, DC330 XRP™ 18V variable speed jig saw, DW960 18V right angle drill, DC411 18V cut-off tool, DC550 18V cut-out tool, DW919 18V flexible floodlight, 1 hour charger, (2) 18V XRP™ batteries, 360° side handle, carbide tipped blade, type 1 and type 27 guards, wrench, backing flange, (1) type 1 wheel, (2) contractor bags and 2-position side handle

DCK950X

Toll Free to Bronx, New York 800-255-0910

Headquarters

	BRONX New York	MAMARONECK New York	ISLANDIA Long Island	BENSALEM Pennsylvania
Ph:	718-299-6060	914-777-3245	631-234-0740	215 -244-1545
Fx:	718-299-1593	914-777-3875	631-234-0686	215-244-1082

HEAVY-DUTY 3/8" 14.4V CORDLESS RIGHT ANGLE DRILL / DRIVER KIT

DW966K-2

- 0-400/0-1,250 RPM
- Durable, right angle transmission with sealed ball bearing
- 210 in-lbs of maximum torque for increased applications such as turning large bits and fasteners
- Variable speed and reversing gives the user the ability to control speed for greater accuracy, and the convenience of reverse
- Includes: 1 hour charger, two 14.4V compact batteries & heavy-duty kit box

1/2" 14.4V XRP™ CORDLESS DRILL / DRIVER KIT

DCD920KX

- Max RPM: 0-425 / 0-1,200 / 0-1,800
- High power motor delivers 325 unit watts out of max power
- XRP™ extended run-time batteries provide long run-time and battery life
- Patented 3-speed all-metal transmission matches the tool to task
- Heavy-duty 1/2" ratcheting chuck helps prevent bits from slipping
- LED worklight provides increased visibility in confined spaces
- Includes: 1 hour charger, (2) 14.4V XRP™ batteries and kit box

1/2" 14.4V XRP™ CORDLESS HAMMERDRILL / DRILL / DRIVER KIT

DCD939KX

- Max RPM: 0-450 / 0-1,400 / 0-1,800
- High power motor delivers 310 unit watts out of max power
- XRP™ extended run-time batteries provide long run-time and battery life
- Patented 3-speed all-metal transmission matches the tool to task
- Heavy-duty 1/2" self-tightening chuck tightens throughout operation
- Hammerdrill Mode delivers up to 30,600 BPM in max 3rd speed
- Includes: 1 hour charger, (2) 14.4V XRP™ batteries and kit box

HEAVY-DUTY 18V CORDLESS RECIPROCATING SAW KIT

DC385K

- 1" stroke length and 2,900 spm for fast cutting
- Keyless blade clamp allows quick blade change without touching blade or reciprocating shaft
- Compact and lightweight; 7.1 lbs.
- Electric brake prevents blades from breaking when exiting plunge cuts
- Includes: DW9116 one hour charger with Automatic Tune-Up™ Mode, 18V XR+™ PACK battery, reciprocating saw blade & heavy-duty kit box

HEAVY DUTY 18V XRP™ CORDLESS CIRCULAR SAW KIT

DC390K

- 3,700 RPM for fast rip cuts and cross cuts
- 6-1/2" carbide tipped blade for 2x cutting capacity at 90° and 45°
- High strength magnesium shoe and upper guard
- 0-50° bevel capacity provides additional capacity for a multitude of applications
- Includes: 1 hour charger, XRP™ battery pack, 16 tooth-carbide saw blade, blade wrench, rip fence and heavy-duty kit box

HEAVY-DUTY 18V 6¾" CORDLESS METAL CUTTING CIRCULAR SAW KIT

DW934K-2

- 0-3,100 RPM
- 50° bevel provides additional capacity for specialty applications
- 6-3/4" 40T carbide tipped blade cuts up to 2" conduit and pipe
- Includes: DW9116 one hour charger with Automatic Tune-Up™ Mode, two 18V XR+™ PACK batteries, 6-3/4" 40T carbide tipped meta blade & heavy-duty kit box

DEWALT

KASS INDUSTRIAL SUPPLY CORP.

HEAVY-DUTY 24V 7/8" CORDLESS SDS ROTARY HAMMER WITH CHIPPING FUNCTION KIT

DC223KA

- 0-1,150 RPM; 0-5,800 BPM
- 360° side handle for better control & ease of use in tight spaces
- Variable speed, reversing switch delivers versatility in all applications
- Electro-pneumatic hammer mechanism for fast penetration and low vibration
- FAN COOLED battery & charger technology increases run-time & number of recharges
- Includes: FAN COOLED charger, two 24V XR+ PACK™ FAN COOLED batteries, 360° side handle, depth rod & heavy-duty kit box

HEAVY-DUTY 36V 4-TOOL COMBO KIT

DCX6401

- DC900 36V 1/2" hammerdrill/drill/driver with 3-speed all-metal transmission
- DC300 36V circular saw with increased cutting capacity at 45° and 90°
- DC305 36V cordless reciprocating saw with flush cutting and increased versatility
- DC509 36V flexible floodlight provides hands-free use
- Includes: 1 hour charger, (2) 36V batteries, 360° side handle, 7-1/4" carbide tipped circular saw blade, circular saw rip fence, reciprocating saw blade and heavy-duty kit box

HEAVY-DUTY 36V 7-1/4" CORDLESS CIRCULAR SAW KIT

DC300K



- 4,000 RPM
- 7-1/4" carbide tipped blade for increased cutting capacity at 90° and 45°
- All-metal keyless blade change system for quick blade changes
- 0-50° bevel capacity with detents at 22.5° and 45°
- High power, high efficiency motor with electric brake
- High strength magnesium shoe and upper guard for long-term cut accuracy
- Includes: 1 hour charger, 36V battery pack, 7-1/4" carbide tipped blade, rip fence and heavy-duty kit box

HEAVY-DUTY 36V 1/2" CORDLESS IMPACT WRENCH KIT

DC800KL

- 1,400 RPM / 2,500 BPM
- High speed all-metal transmission
- High efficiency motor with replaceable brushes
- Preferred rocker switch design for fast and easy forward and reverse
- Patented all-metal anvil prevents shearing
- Anti-Slip comfort grip provides increased comfort and control
- Includes: (2) 36V batteries, 1 hour charger and heavy-duty kit box

HEAVY-DUTY 36V ROTARY HAMMER KIT

DC233KL

- 1,150 RPM / 4,400 BPM
- 1.9 ft-lbs of impact energy
- Dual Mode: Hammerdrill/Drill
- Compact design with anti-slip comfort grip
- Shocks™ Active Vibration Control significantly reduces vibration
- Includes: (2) 36V battery packs, 1 hour charger, 360° side handle with depth rod and heavy-duty kit box

HEAVY-DUTY 36V CORDLESS RECIPROCATING SAW KIT

DC305K

- 1-1/8" stroke length and 0-3,000 spm for fast cutting
- 4-Position keyless blade clamp for quick blade change and versatility
- Anti-slip comfort grip for better control
- 3-Position Adjustable Shoe for adjusting depth of cut
- High power, high efficiency motor with electric brake
- Includes: 1 hour charger, 36V battery, reciprocating saw blade and heavy-duty kit box

1/2" 36V CORDLESS LI-ION HAMMERDRILL / DRILL / DRIVER KIT

DC901KL

- Max RPM: 0-400/0-1,200/0-1,600
- Max BPM: 0-6,800/0-20,400/0-27,200
- High efficiency motor delivers 750 unit watts out of max power
- DeWalt® exclusive lithium ion cells offer long battery life up to 2,000 recharges
- Patented 3-speed all-metal transmission matches the speed to the application
- Heavy-duty 1/2" self-tightening chuck tightens throughout operation
- Includes: 1 hour charger, (2) 36V li-Ion batteries, 360° side handle and kit box

HEAVY-DUTY 36V BATTERY PACK

DC9360

- DeWalt™ exclusive nano-phosphate lithium ion cells provide high power for corded performance
- Deliver 2-3 times more run-time than 18V
- Long battery life & durability: 2,000 recharges
- 36V high performance battery pack provides long run-time and battery life
- Lightweight design- 2.4 lbs; same weight as an 18V battery
- No memory & virtually no self-discharge for less downtime

Toll Free to Bronx, New York 800-255-0910

Headquarters

	BRONX New York	MAMARONECK New York	ISLANDIA Long Island	BENSALEM Pennsylvania
Ph:	718-299-6060	914-777-3245	631-234-0740	215 -244-1545
Fx:	718-299-1593	914-777-3875	631-234-0686	215-244-1082

6.5 HP - 10 GALLON GAS WHEELED COMPRESSOR WITH ROLL CAGE

D55684 - 8.0 HP

- 150 Max PSI, 10.5 SCFM Pump delivers power and recovery needed to run extra nailers over standard 8 gallon
- DeWalt® 196 cc / 6.5 HP OHV engine with low oil shut off device
- Forced-air cooling allows the pump to run more efficiently and produce higher SCFM
- Roll cage and control panel provide protection to key compressor components
- One hand push/pull handle for ease of mobility on the jobsite
- 12" Non-Pneumatic Tires provide easy, flat-free mobility
- Automatic idle control for reduced fuel consumption
- Ball valve drain allows for quick and thorough tank draining

5.5 HP 8 GAL. GAS WHEELED PORTABLE COMPRESSOR

D55672

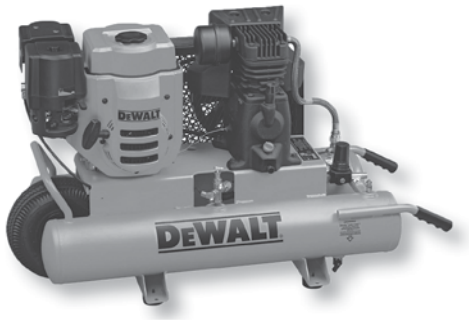

- 150 Max PSI, 9.0 SCFM Pump delivers power and recovery needed to run extra nailers over standard 8 gallon
- DeWalt® 196 cc / 6.5 HP OHV engine with low oil shut off device
- Forced-air cooling allows the pump to run more efficiently and produce higher SCFM
- Low profile design allows for easy maneuverability
- Large 10" non-flat tire for improved job site mobility and reliability
- Automatic idle control for reduced fuel consumption
- Ball valve drain allows for quick and thorough tank draining
- Includes: DeWalt® Synthetic Compressor Oil and 3/8" NPT pressure regulator

2 HP 4 GAL. TWIN STACK ELECTRIC HAND CARRY COMPRESSOR

D55153

- 4.5 CFM delivered @ 100 PSI, enables speedy recovery
- Oil lubricated pump improves durability
- Dual soft start valves assist in cold weather start up
- 4 gallon twin stack tank design with proven acceptance in the market
- Cast iron cylinder enhances pump life
- Includes: DEWALT synthetic compressor oil and pressure regulator

1.5 HP CONTINUOUS - 7.5 GALLON ELECTRIC WHEELED COMPRESSOR

D55171

- 175 Max PSI, 4.6 SCFM pump enables more nails to be fired with quicker recovery
- 120V / 1725 RPM, 4-pole capacitor start motor provides long life and quieter 73 dBA operation
- 2-Stage Sealed Lube Pump provides extended maintenance-free operation
- Vertical stand feature and collapsible handle saves space for transporting and storing
- Roll cage and 12" non-pneumatic tires for easy, flat-free mobility
- Automotive style air intake filter protects pump from dirt and other contaminants
- Includes: 3/8" NPT pressure regulator

1.1 HP CONTINUOUS - 4 GALLON ELECTRIC WHEELED DOLLY-STYLE COMPRESSOR

D55154

- 4.0 CFM delivered at 90 PSI pump provides rapid recovery
- Oil lubricated pump improves durability
- Cast iron cylinder enhances pump life
- 10" pneumatic wheel and handle kit for ease of mobility
- Top load panel allows unit to transport loads up to 100 lbs.
- Run multiple tools from dual universal quick couplers
- Dual soft start valves assist in cold weather start-up
- Includes: DeWalt® compressor oil and control panel with (2) universal quick couplers

DEWALT

KASS INDUSTRIAL SUPPLY CORP.

3000 WATT GAS GENERATOR

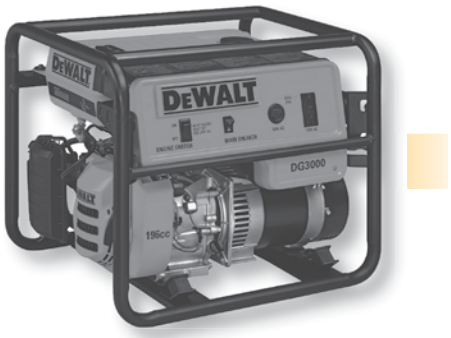

DG3000

- DeWalt® 196cc / 6.5 HP OHV engine provides work site reliability
- Maintenance free, brushless DeWalt® alternator for increased durability
- High Amp surge capacity ideal for starting high Amp tools including air compressors
- Super quiet muffler reduces engine noise
- Low oil shut-off provides greater pump protection
- Includes: spark plug wrench

4400 WATT GAS GENERATOR

DG4400B

- DeWalt® 18 volt battery start offers 20% more starting watts than others in its class
- DeWalt® 270cc / 9 HP OHV engine provides worksite reliability
- Proper 120v and 240v outlets for jobsite applications
- Worksite tested frame with panel protection bars for increased durability
- Super quiet muffler reduces engine noise
- Idle control saves fuel and reduces noise
- Low oil shut-off provides greater pump protection
- Includes: 18 volt XRP™ battery, 1 hour DEWALT® charger, wheel kit, handle kit and lifting hook

6300 WATT GAS GENERATOR

DG6300B

- DeWalt® 18 volt battery start offers 20% more starting watts than others in its class
- DeWalt® 389cc / 13 HP OHV engine provides worksite reliability
- Proper 120v and 240v outlets for jobsite applications
- Worksite tested frame with panel protection bars for increased durability
- Super quiet muffler reduces engine noise
- Idle control saves fuel and reduces noise
- Low oil shut-off provides greater pump protection
- Includes: 18 volt XRP™ battery, 1 hour DEWALT® charger, wheel kit, handle kit and lifting hook

7000 WATT GAS GENERATOR

DG7000B

- DeWalt® 18 volt battery start offers 20% more starting watts than others in its class
- DeWalt® 389cc / 13 HP OHV engine provides worksite reliability
- Proper 120v and 240v outlets for jobsite applications
- Worksite tested frame with panel protection bars for increased durability
- Super quiet muffler reduces engine noise
- Idle control saves fuel and reduces noise
- Low oil shut-off provides greater pump protection
- Includes: 18 volt XRP™ battery, 1 hour DEWALT® charger, wheel kit, handle kit and lifting hook

Toll Free to Bronx, New York 800-255-0910

ROCK CARBIDE™ SDS PLUS DRILL BITS



- PILOT POINT® tip starts on contact for greater accuracy
- Serrated titanium carbide tip provides EXTREME DURABILITY for longer drilling
- Improved flute design pulls dust quickly for faster drilling

Cat. # 1 Per Pkg.	Cat. # 25 Per Pkg.	Dia.	Usable Length	Overall Length	Competitive Cross Reference Rawl Cat. #*	Bosch Cat. #*	Hawera Cat. #*
DW5401	DW5401B25	5/32″	4-1/2″	6-1/2″	0302	HC2001	90002
DW5402	DW5402B25	3/16″	2″	4″	0304	HC2010	90005
DW5403	DW5403B25	3/16″	4-1/2″	6-1/2″	0306	HC2011	90006
DW5404	DW5404B25	3/16″	6-1/2″	8-1/2″	0308	HC2012	90007
DW5405	DW5405B25	3/16″	8″	10″	0310	HC2013	90004
DW5406	DW5406B25	3/16″	10″	12″	0312	HC2014	90008
DW5407	—	3/16″	12″	14″	0314	HC2015	90009
DW5408	—	3/16″	14″	16″	—	—	90909
DW5410	DW5410B25	7/32″	4″	6″	0315	HC2031	90099
DW5412	—	7/32″	8″	10″	0317	—	90102
DW5416	DW5416B25	1/4″	2″	4″	0320	HC2040	90010
DW5417	DW5417B25	1/4″	4″	6″	0321	HC2041	90013
DW5418	DW5418B25	1/4″	6-1/2″	8-1/2″	0322	HC2042	90014
DW5420	—	1/4″	10″	12″	—	—	90017
DW5421	—	1/4″	12″	14″	0324	HC2045	90015
DW5424	DW5424B25	5/16″	4″	6″	0329	HC2051	90022
DW5426	—	5/16″	10″	12″	0331	HC2054	90025
DW5427	DW5427B25	3/8″	4″	6″	0333	HC2061	90028
DW5429	—	3/8″	8″	10″	—	—	90029
DW5430	—	3/8″	10″	12″	0336	HC2064	90031
DW5431	—	3/8″	16″	18″	0338	HC2067	90032
DW5432	—	3/8″	22″	24″	0339	HC2068	90033
DW5433	—	7/16″	4″	6″	0341	HC2071	90037
DW5435	—	7/16″	10″	12″	0343	HC2074	90038
DW5437	DW5437B25	1/2″	4″	6″	0346	HC2081	90040
DW5438	—	1/2″	8″	10″	0348	—	90041
DW5439	—	1/2″	10″	12″	0349	HC2084	90043
DW5440	—	1/2″	16″	18″	0351	HC2087	90045
DW5441	—	1/2″	22″	24″	0352	HC2088	90046
DW5442	—	9/16″	4″	6″	0354	HC2091	90048
DW5443	—	9/16″	10″	12″	—	HC2094	90050
DW5444	—	9/16″	16″	18″	—	HC2097	90051
DW5446	DW5446B10**	5/8″	6″	8″	0359	HC2102	90053
DW5447	—	5/8″	10″	12″	0361	HC2104	90055
DW5448	—	5/8″	16″	18″	0362	HC2107	90056
DW5449	—	5/8″	22″	24″	—	HC2108	90054
DW5450	—	11/16″	6″	8″	0364	HC2112	90057
DW5453	—	3/4″	6″	8″	0368	HC2122	90059
DW5455	—	3/4″	10″	12″	0370	HC2124	90061
DW5456	—	3/4″	16″	18″	0371	HC2127	90063
DW5457	—	3/4″	22″	24″	—	HC2128	90064
DW5460	—	7/8″	6″	8″	0375	HC2142	90065
DW5461	—	7/8″	10″	12″	0376	HC2144	90067
DW5462	—	7/8″	16″	18″	0377	HC2147	90069
DW5464	—	1″	8″	10″	0380	HC2163	90071
DW5466	—	1″	16″	18″	0382	HC2167	90076

*Cross reference numbers refer to individual catalog numbers, not bulk
**10 Per Package

SETS UP TO 25% MORE ANCHORS —GUARANTEED —

ROCK CARBIDE™ SDS PLUS DRILL BIT SET



DW5470

- Contains:
  3/16″ x 4-1/2″ x 6-1/2″,
  1/4″ x 2″ x 4″,
  1/4″ x 4″ x 6″,
  3/8″ x 4″ x 6″ and
  1/2″ x 4″ x 6″ bits

DEWALT

KASS INDUSTRIAL SUPPLY CORP.

SDS PLUS HEX SHANK HAMMER BITS



- 1/4" hex shoulder allows use of one tool for drilling and driving concrete fasteners

Cat. # 1 Per Pkg.	Dia.	Usable Length	Overall Length	Competitive Cross Reference Rawl Cat. #	Bosch Cat. #	Hawera Cat. #
DW5359	5/32"	2"	5"	2793	—	90120
DW5360	5/32"	3"	6"	—	HC2301	90122
DW5361	5/32"	4"	7"	2794	HC2302	90124
DW5362	3/16"	2"	5"	2796	HC2310	90110
DW5363	3/16"	3"	6"	—	HC2311	90112
DW5364	3/16"	4"	7"	2796	HC2312	90114
DW5365	6" Drill Sleeve	(1/4" hex)	—	2795	—	—

SDS-MAX SHANK LARGE DIAMETER CARBIDE-TIPPED ROTARY HAMMER BITS



- Hardened core reduces breakage
- Double flute design gives quicker dust extraction and faster drilling

2 CUTTER HEAD DESIGN

- Large flute access for better dust extraction and longer life

4 CUTTER HEAD DESIGN

- Four cutter heads reduce vibration for less user fatigue
- Concave head design allows dust to enter flute chambers quickly increasing bit life

SDS ADAPTER

DW5891

Cat. No.	Conversion Factor
DW5891	SDS MAX to SDS

Cat. # 1 Per Pkg.	Dia.	Usable Length	Overall Length	Competitive Cross Reference Rawl Cat. #	Bosch Cat. #	Hawera Cat. #
DW5803*	1/2"	8"	13-1/2"	8801*	HC5010*	95205*
DW5804*	1/2"	16"	21-1/2"	8802*	HC5011*	95210*
DW5801*	9/16"	8"	13-1/2"	8805*	HC5015*	95215*
DW5802*	9/16"	16"	21-1/2"	8806*	HC5016*	95220*
DW5806	5/8"	8"	13-1/2"	8809*	HC5020*	95225*
DW5809	5/8"	16"	21-1 /2"	8810*	HC5021*	95230*
DW5807	5/8"	31"	36"	8812*	HC5023*	95232*
DW5808	11/16"	16"	21-1/2"	8815*	HC5056*	95233*
DW5810	3/4"	8"	13-1/2"	8817*	HC5030*	95235*
DW5812	3/4"	16"	21-1/2"	8818*	HC5031*	95240*
DW5813	3/4"	31"	36"	8820*	HC5033*	95245*
DW5814	13/16"	16"	21-1/2"	—	HC5036*	95247*
DW5817	27/32"	16"	21-1/2"	—	HC5039*	95251*
DW5815	7/8"	8"	13-1/2"	8829*	HC5040*	95255*
DW5816	7/8"	16"	21-1/2"	8830*	HC5041*	95260*
DW5818	1"	8"	13-1/2"	8833*	HC5050*	95265*
DW5819	1"	16"	21-1/2"	8834*	HC5051*	95270*
DW5820	1"	31"	36"	8836*	HC5053*	95275*
DW5823	1-1/16"	18"	22-1/2"	—	HC5056*	95277*
DW5821	1-1/8"	10"	15"	8843*	HC5060*	95279*
DW5822	1-1/8"	18"	21-1/2"	8844*	HC5061*	95285*
DW5824	1-1/4"	10"	15"	8846*	HC5070*	95290*
DW5825	1-1/4"	18"	21-1/2"	8847*	HC5071*	95295*
DW5826	1- 1/4"	31"	36"	8848*	HC5073*	95300*
DW5827	1-3/8"	18"	22-1/2"	8853	HC5081*	95310*
DW5829	1-7/16"	18"	22-1/2"	—	HC5086*	95317*
DW5828	1-1/2"	18"	22-1/2"	8859	HC5091*	95320*
DW5861	1-9/16"	18"	22-1/2"	—	HC5096*	95323*
DW5830	1-3/4"	18"	22-1/2"	—	HC5098*	95328*
DW5831	2"	18"	22-1/2"	—	HC5099*	95333*
DW5860	1-5/16"	18"	22-1/2"	—	—	—

* 2 Cutter Head Design

Toll Free to Bronx, New York 800-255-0910

Headquarters

	BRONX New York	MAMARONECK New York	ISLANDIA Long Island	BENSALEM Pennsylvania
Ph:	718-299-6060	914-777-3245	631-234-0740	215 -244-1545
Fx:	718-299-1593	914-777-3875	631-234-0686	215-244-1082

SPLINE SHANK CARBIDE-TIPPED BITS

2 CUTTER HEAD DESIGN

- Hardened core reduces breakage
- Large flute access for better dust extraction and longer life
- Double flute design gives quicker dust extraction and faster drilling

4 CUTTER HEAD DESIGN



- Hardened core reduces breakage
- Concave head design allows dust to enter flute chambers quickly increasing bit life
- Four cutter heads reduce vibration for less user fatigue
- Double flute design gives quicker dust extraction and faster drilling

DeWALT Cat. #					Competitive Cross Reference					
					Hawera Cat. #		Rawl Cat. #		Bosch Cat. #	
2 Cutter	4 Cutter	Dia.	Useful Length	Overall Length	2 Cutter	4 Cutter	2 Cutter	4 Cutter	2 Cutter	4 Cutter
DW5700	—	3/8″	5″	10″	93304	—	1401	—	HC4501	—
DW5701	—	3/8″	8″	13″	93306	—	1402	—	—	—
DW5702	—	7/16″	5″	10″	93310	—	1405	—	—	—
DW5703	—	1/2″	5″	10″	93312	—	1407	—	HC4510	—
DW5704	—	1/2″	11″	16″	93316	—	1409	—	HC4511	—
DW5705	—	1/2″	17″	22″	93318	—	1410	—	HC4512	—
DW5706	—	1/2″	22″	27″	93320	—	1412	—	HC4513	—
DW5707	—	1/2″	31″	36″	93322	—	1413	—	HC4514	—
DW5708	—	9/16″	5″	10″	93324	—	1415	—	HC4516	—
DW5709	DW5740	5/8″	5″	10″	93330	93021	1418	7017	HC4520	HC4020
DW5710	DW5741	5/8″	11″	16″	93334	93024	1420	7020	HC4521	HC4021
DW5711	DW5742	5/8″	17″	22″	93336	93025	1421	7020	HC4522	HC4022
DW5712	DW5743	5/8″	22″	27″	93338	93027	1423	7023	—	HC4023
—	DW5744	5/8″	31″	36″	93340	93028	1424	7024	—	HC4024
DW5713	—	11/16″	5″	10″	93342	—	1427	—	—	—
—	DW5745	11/16″	11″	16″	93344	93026	—	7028	—	HC4026
DW5714	DW5746	3/4″	5″	10″	93346	93031	1431	7031	HC4530	HC4030
DW5715	DW5747	3/4″	11″	16″	93350	93030	1433	7033	HC4531	HC4031
DW5716	DW5748	3/4″	17″	22″	93352	93033	1434	7035	HC4532	HC4032
DW5717	DW5749	3/4″	22″	27″	93354	93036	1436	7036	—	HC4033
—	DW5750	3/4″	31″	36″	93356	93037	—	7037	—	HC4034
—	DW5751	27/32″	11″	16″	93358	93038	—	—	—	HC4039
DW5719	DW5752	7/8″	11″	16″	93360	93039	1443	7043	HC4540	HC4040
DW5720	DW5753	7/8″	17″	22″	93362	93042	1444	7045	HC4541	HC4041
DW5721	DW5755	1″	11″	16″	93366	93045	1449	7049	HC4550	HC4050
DW5722	DW5756	1″	17″	22″	93368	93048	1450	7051	HC4551	HC4051
DW5723	DW5757	1″	31″	36″	93370	93049	1453	7053	—	HC4053
DW5724	—	1-1/8″	5″	10″	—	—	—	—	—	—
DW5725	DW5758	1-1/8″	11″	16″	93372	93051	1457	7057	—	HC4060
DW5726	DW5759	1-1/8″	17″	22″	93374	93054	1458	7059	HC4561	HC4061
DW5727	DW5760	1-1/4″	11″	16″	93376	93057	1464	7064	—	HC4070
DW5728	DW5761	1-1/4″	17″	22″	93378	93060	1465	7066	HC4571	HC4071
—	DW5762	1-1/4″	31″	36″	93380	93061	—	7069	—	HC4073
DW5729	DW5763	1-3/8″	11″	16″	93382	—	1470	—	—	HC4073
DW5730	DW5765	1-3/8″	17″	22″	93384	93066	1471	7072	—	HC4081
DW5731	—	1-1/2″	11″	16″	93386	—	—	—	—	—
DW5732	DW5764	1-1/2″	17″	22″	93388	93069	1477	7077	HC4591	HC4091
DW5733	DW5768	1-3/4″	17″	22″	93390	93072	1486	—	—	—
DW5734	DW5769	2″	17"	22″	93392	93075	1490	—	—	—

DEWALT

KASS INDUSTRIAL SUPPLY CORP.

BI-METAL HOLE SAWS

- Optimized tooth design for superior performance while cutting metal
- M3 steel provides faster cuts and longer life than the M2 steel of the industry standard product
- Versatility of deep-cut style allows users to cut either wood or metal

Cat. No.	Hole Saw Size	Recommended Speed In Steel RPM
D180009	9/16" (14mm)	550
D180010	5/8" (16mm)	530
D180011	11/16" (17mm)	500
D180012	3/4" (19mm)	460
D180098	20 mm	425
D180013	13/16" (21mm)	425
D180014	7/8" (22mm)	390
D180015	15/16" (24mm)	370
D180016	1" (25mm)	350
D180017	1-1/16" (27mm)	325
D180018	1-1/8" (29mm)	300
D180019	1-3/16" (30mm)	285
D180020	1-1/4" (32mm)	275
D180021	1-5/16" (33mm)	260
D180022	1-3/8" (35mm)	250
D180023	1-7/16" (37mm)	240
D180024	1-1/2" (38mm)	230
D180025	1-9/16" (40mm)	220
D180026	1-5/8" (41mm)	210
D180027	1-11/16" (43mm)	205
D180028	1-3/4" (44mm)	195
D180029	1-13/16" (46mm)	190
D180030	1-7/8" (48mm)	180
D180032	2" (51mm)	170
D180033	2 -1/16" (52mm)	165

Cat. No.	Hole Saw Size	Recommended Speed In Steel RPM
D180034	2-1/8" (54mm)	160
D180036	2-1/4" (57mm)	150
D180038	2-3/8" (60mm)	140
D180040	2-1/2" (64mm)	135
D180041	2-9/16" (65mm)	130
D180042	2-5/8" (67mm)	130
D180043	68mm	125
D180044	2-3/4" (70mm)	125
D180046	2-7/8" (73mm)	120
D180048	3" (76mm)	115
D180050	3-1/8" (79mm)	110
D180052	3-1/4" (83mm)	105
D180054	3-3/8" (86mm)	100
D180056	3-1/2" (89mm)	95
D180058	3-5/8" (92mm)	95
D180060	3-3/4" (94mm)	90
D180064	4" (102mm)	85
D180066	4-1/8" (105mm)	85
D180068	4-1/4" (108mm)	80
D180072	4-1/2" (114mm)	75
D180076	4-3/4" (121mm)	70
D180080	5" (127mm)	65
D180088	5-1/2" (140mm)	60
D180096	6" (152mm)	55

HOLE SAW SETS

8 PIECE PLUMBER'S HOLE SAW KIT

D180001

Contains the most commonly used sizes:

Bi-Metal Hole Saws:
3/4" (19mm), 7/8" (22mm), 1-1/8" (29mm), 1-1/2" (38mm), 1-3/4" (44mm), 2-1/4" (57mm)

Mandrel DW1800:
1/4" (6mm) shank (9/16" to 1-3/16")

Quick Change Mandrel DW1803:
7/16" (11mm) shank (1-1/4" to 6")

8 PIECE ELECTRICIAN'S HOLE SAW KIT

D180002

Contains the most commonly used sizes:

Bi-Metal Hole Saws:
7/8" (22mm), 1-1/8" (29mm), 1-3/8" (35mm), 1-3/4" (44mm), 2" (51mm), 2-1/2" (64mm)

Mandrel DW1800:
1/4" (6mm) shank (9/16" to 1-3/16")

Quick Change Mandrel DW1803:
7/16" (11mm), shank (1-1/4" to 6")

Toll Free to Bronx, New York 800-255-0910

VARIABLE-SPEED - DUAL-ACTION QUIK-CHANGE™ TIGER SAW® KIT

9748

- 11.5 Amps, SPM 0-2,600
- Quik-Change™ blade clamp for keyless blade changes in seconds
- Quik-Change™ front shoe can be extended to utilize more of the blade's teeth in the cutting action
- Blade can be installed upside down to allow for better reach in tight fitting applications
- Includes: heavy-duty case for tool storage, blade & operating manual

TIGERCLAW®

VARIABLE-SPEED ANGLE TIGER SAW® KIT

9750

- 11.5 Amps, SPM 0-2,900
- Combines two adjustable gear housings to handle any conceivable cutting situation
- Rear gear housing adjusts as much as 180° with 13 positive stop locations for close quarters cutting
- Quik-Change™ front shoe can be extended to utilize more of the blade's teeth in the cutting action
- Includes: adapter for universal jig saw blade, heavy-duty case for tool storage, blade & operating manual

7¼" CIRCULAR SAW KIT

324MAG

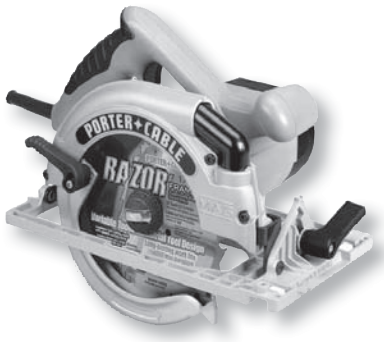

- 15 Amps, 5,800 RPM
- Quik-Change™ keyless blade change offer tool-less blade changes in seconds
- Magnesium construction is more durable and lighter at 9.6 lbs.
- Integrated dust exhaust port with 205° rotation and 1" O.D. for vacuum attachment
- Soft Grip handle for a comfortable fit
- On Board cord clip keeps cord away from blade side of tool
- 100% ball & needle bearings
- Extended miter lip on lower guard for no-hang up cuts
- Standard Equipment: saw, 7-1/4" framer razor blade, case, and operating manual

4-1/2" TRIM SAW

314

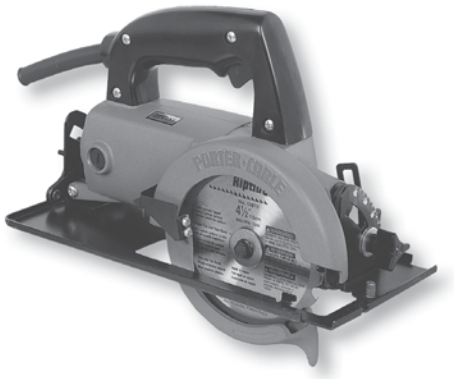

- 4.5 AC/DC AMPS; 4,500 RPM
- Rugged Worm Gear Drive
- Cuts 1-5/16" at 90° & 1-1/16" AT 45°
- 100% Ball Bearings
- Includes: 20T Carbide-Tipped Riptide™ Blade, Blade Wrench, Knob, Basic Insert and Operating Manual

QUIK-CHANGE™ JIG SAW KIT

9543

- 6 Amps, Speed SPM 500-3,100
- Quick-Change™ blade clamp allows fast blade changes - no tools required
- Unique guide system keeps blade running straight and true whether in vertical or angle cuts up to 45° left or right
- Accepts tang-shank blades for reduced blade breakage
- Four-position selection lever for choice of reciprocating blade stroke or three° of orbit
- Quick-Tilt™ base can be adjusted with built-in wrench - base includes detents for accurate 15°, 30°, and 45° positioning left and right
- Extra-large base provides greater stability in all cuts and can be adjusted to enable cuts close to a vertical surface
- Dust blower for clearing line of cut - may be turned off for metal cutting with coolants
- Dust collection capability when used with accessory vacuum collector and your vac
- Includes: blade, non-marring base insert for delicate surfaces, anti-splinter base insert, heavy-duty carrying case & operating manual

UNIVERSAL-SHANK JIG SAW BLADES

SPECIAL PURPOSE CUTTING

	Cat. No.	Blades Per Pkg.	Tooth Per In.	Tooth Type	Blade Length	Blade Width	Material	Recommended Use
	12527-5	5	6	—	4-1/8"	—	Bi-Metal	Deluxe blade for fast scroll & pocket
	12528-5	5	10	—	4-1/8"	—	Bi-Metal	Smoother scroll & circular cutting
	12529-5	5	10	—	4"	—	Bi-Metal	Deluxe blade for straight & smooth cutting
	12520-5	5	20	Taper	2-3/4"	3/16"	HS	Scroll & super smooth cutting
	12521-5	5	6	Set	4"	5/16"	HC	Fast, rough & circular cutting
	12522-5	5	8	Set	4"	5/16"	HC	Smoother scroll & circular cutting
	12523-5	5	6	Taper	4"	1/4"	HC	Smooth, fast scroll & pocket cutting
	12524-5	5	10	Taper	4"	1/4"	HC	Fine, straight & scroll cutting
	12508-5	5	10	Taper	3-5/8"	1/4"	HS	Deluxe blade makes fast, smooth, deeper cuts in wood
	12509-5	5	6	Taper	3-5/8"	3/8"	HS	Deluxe blade for straight, deep, smooth cutting
	12525-5	5	10	Taper	4"	1/4"	HC	Veneer, non-chip, down cutting action
	12515-5	5	12	Set	3-5/8"	5/16"	HS	Cutting nail-embedded wood & abrasives

METAL CUTTING

	Cat. No.	Blades Per Pkg.	Tooth Per In.	Tooth Type	Blade Length	Blade Width	Material	Recommended Use
	12530-5	5	10/14	—	3-5/8"	—	Bi-Metal	Variable tooth medium gauge metal cutting
	12516-5	5	13	Set	2-3/4"	5/16"	HS	Fiberglass & heavy gauge metal cutting
	12517-5	5	17	Set	2-3/4"	5/16"	HS	Cutting pipe, tubing & medium gauge metal
	12518-5	5	21	Set	2-3/4"	5/16"	HS	Ferrous metals-medium gauge

Toll Free to Bronx, New York 800-255-0910

3" X 21" VARIABLE-SPEED BELT SANDER

352VS

- 8.0 Amps, 850-1,300 SFPM Belt Speed
- Belt & gear drive
- Dust bag swivels 360°
- Fingertip belt-tracking knob
- Quick-release belt-change lever
- Designed for flush sanding up to vertical surfaces
- Motor is located over platen for maximum performance and perfect balance
- Includes: 100G ceramic aluminum oxide belt, dust bag assembly & operating manual

24" BELT SANDERS

360
3" Wide

362
4" Wide

- 12.0 Amps, 1,500 SFPM Belt Speed
- Motor is located over platen for maximum performance and perfect balance
- Belt & gear drive system transfers power from the motor to the sanding belt
- Quick-release belt-change lever
- Fingertip belt-tracking knob for quick, accurate belt adjustments
- Large capacity dust collection bag swivels 360° so it's never in the way during sanding
- User-friendly design with ergonomically correct handles
- Both models include: 100G ceramic aluminum oxide belt, dust bag assembly & operating manual

HALF-SHEET FINISHING SANDER

505

- 2.3 Amps, 10,000 OPM
- 1.4/2.4 Amps, 5,000-12,000 OPM
- 1/8" orbit
- 100% ball bearings
- Smooth, low vibration
- Solid metal frame for precision seating and alignment of bearings, motor, and fan, providing the maximum in long, trouble-free tool life
- All-metal housing and trigger for reduced vibration and long trouble-free tool life
- Includes: abrasive sheet & operating manual

SPEED-BLOC® QUARTER-SHEET FINISHING SANDER

330

- 1.2 Amps, 14,000 OPM
- Pad Size: 4-1/2"x5-1/2"
- Comfortable, easy-grip outer housing for hours of use without fatigue
- Solid metal frame for precision seating and alignment of bearings, motor, and fan, providing the maximum in long, trouble-free tool life
- Rubber posts isolate your hand from vibration while enabling full sanding action and efficiency on the work
- 100% ball bearings
- Uses pre-cut adhesive or self cut standard paper with metal stamp
- Includes: abrasive sheet, clamp tool & operating manual

PLATE JOINER KIT

557

BISCUITS IN REUSEABLE CONTAINERS ARE ALSO AVAILABLE - CALL YOUR REPRESENTATIVE FOR SIZES

- 7.5 Amps, 10,000 RPM
- Lock-on trigger
- 1" O.D. dust port accepts standard bag or can be connected to a vacuum
- Fence tilts from 0° to 135° with positive adjustable stop at 90°
- Seven-position rotating depth stop for FF, #0, #10, #20, Simplex, Duplex, and Max (#6) biscuits
- Bale handle attached to fence, not motor, for greater stability and added control during cuts
- Blade Type: 4 & 6 tooth (CT)
- Includes: 2" & 4" blades, centering plate, dust bag, chip deflector, Allen wrench, carrying case & operating manual

PORTER-CABLE

KASS INDUSTRIAL SUPPLY CORP.

SPEEDMATIC® 3¼ PEAK HP FIVE-SPEED ROUTER

7518

- 15 Amps, 10,000, 13,000, 16,000, 19,000, 21,000 RPM
- 1/2" collet
- 100% sealed ball bearings
- Electronic five-speed with soft start
- Maintains constant speed under load
- Auto-release collet system ends "frozen" bits
- Unique design puts bottom bearing closer to work for minimum bit run-out and vibration
- Precision machined aluminum motor housing & base
- Includes: base, 1/2" collet, collet wrenches and operating manual

SPEEDMATIC® 3¼ PEAK HP FIVE-SPEED PLUNGE ROUTER

7539

- 15 Amps, 10,000, 13,000, 16,000, 19,000, 21,000 RPM
- 1/2" collet
- 100% sealed ball bearings
- Electronic five-speed with soft start
- Maintains constant speed under load
- 3" plunge range with fully enclosed springs
- Unique design puts bottom bearing closer to work for minimum bit run-out and vibration
- Precision machined aluminum motor housing & base
- Includes: base, 1/2" collet, collet wrenches & operating manual

ROUTER TABLE

698



- Multiple starting pin locations
- Dust collection hood sized for 2-1/2" hose
- 12-7/8" leg height allows use of 1-1/2 to 3-1/4 HP routers
- Quick-adjust split fence design with independently adjustable halves
- 3-5/8" table hole size allows use of 3-1/2" diameter router bits
- 19-3/4" x 16-3/4" machined aluminum table with cast-in lip to support extensions
- Includes: 3/4" miter gauge & operating manual

1¾ PEAK HP ROUTER

690LR

- 11 Amps, 27,500 RPM
- 1/4" & 1/2" collets
- Auto-release collet system ends "frozen" bits
- Precision machined aluminum motor housing & base
- Accurate micrometer depth-of-cut adjustment to 1/128"
- 100% sealed ball bearings
- Dust-sealed switch
- Lever release height adjustment
- Under table stop prevents motor from inadvertently rotating out of base
- Includes: base, 1/4" collet, 1/2" collet, collet wrenches and operating manual

1¾ PEAK HP VARIABLE-SPEED ROUTER KIT

694VK

- 11 Amps, 10,000-27, 500 RPM
- Soft start
- Dust-sealed switch
- Auto-release collet system ends "frozen" bits
- Solid, die-cast and precision machined motor housing and bases for greater accuracy and durability
- Permanently sealed precision ball-bearing construction
- Under table stop prevents motor from inadvertently rotating out of base
- Includes: base, 1/4" collet, 1/2" collet, collet wrenches, carrying case, plunge base & operating manual

LAMINATE TRIMMER

7310

- 5.6 Amps, 30,000 RPM
- Spindle lock
- Sliding switch
- 1/4" collet capacity
- All metal gear housing
- Precision cast aluminum base
- 100% ball bearing construction
- Micro-set™ depth-of-cut adjustment knob
- Designed for continuous professional use and long trouble-free life
- Base Size: 3-3/8"x3-5/8" rectangular
- Includes: base, collet wrench & operating manual

Toll Free to Bronx, New York 800-255-0910

DOUBLE FLUTE PLUNGE CUTTING STRAIGHT BITS

DESIGNED FOR GENERAL STOCK REMOVAL WHERE SUPERIOR BALANCE AND VIBRATION FREE CUTTING PROVIDE A SMOOTHER FINISH AND LONGER BIT LIFE



Bit Cat. No.	A Cut Width	B Flute Length	C Shank Dia.	D Shank Length
43109PC**	1/8″	3/8″	1/4″	1″
43310PC	3/16″	13/32″	1/4″	1″
43051PC	3/16″	1/2″	1/4″	1-5/16″
43718PC	1/4″	1″	1/4″	1-1/4″
43207PC	1/4″	3/4″	1/2″	1-5/8″
43742PC	1/4″	1″	1/4″	1-3/8″
43300PC	5/16″	1″	1/4″	1-3/8″
43312PC	3/8″	1″	1/4″	1″
43719PC	3/8″	1″	1/2″	1-5/16″
43318PC	1/2″	1″	1/4″	1″
43057PC	1/2″	1″	1/2″	1-1/4″
43058PC	1/2″	1-1/4″	1/2″	1-3/8″
43720PC	1/2″	2″	1/2″	1-1/4″
43721PC	1/2″	2″	1/2″	1-3/4″
43118PC	1/2″	2-1/2″	1/2″	1-13/16″
43327PC	9/16″	3/4″	1/4″	1-1/4″
43333PC*	5/8″	3/4″	1/4″	1-1/4″
43189PC*	5/8″	1-1/4″	1/2″	1-7/16″
43208PC*	11/16″	1″	1/4″	1-3/8″
43722PC*	3/4″	1-1/4″	1/2″	1-5/8″
43052PC*	3/4″	3/4″	1/4″	1-1/4″
43029PC*	13/16″	1″	1/4″	1-3/8″
43062PC*	7/8″	1-1/4″	1/2″	1-7/16″
43063PC*	1″	1-1/4″	1/2″	1-7/16″

*New chip limiting design provides better cut
**Solid carbide cutting edge on HSS shank

DOUBLE FLUTE STRAIGHT BITS

DESIGNED FOR THROUGH-TEMPLET CUTS WHERE GUIDING WITH A BALL BEARING IS DESIRED



Bit Cat. No.	A Cut Width	Bearing Dia.	B Flute Length	C Shank Dia.	D Shank Length
43451PC	5/16″	1/2″	3/4″	1/4″	1-1/2″
43325PC	1/2″	1/2″	1″	1/4″	1-1/2″
43326PC	5/8″	5/8″	1″	1/4″	1-1/2″
43328PC	9/16″	5/8″	9/16″	1/4″	1-1/2″
43329PC*	3/4″	3/4″	1″	1/4″	1-1/2″

*New chip limiting design provides better control

CARBIDE TIPPED BITS LAST LONGER THAN HIGH SPEED STEEL BITS
THE SHANK AND BODY ARE MADE FROM ONE PIECE OF STEEL AND TUNGSTEN CARBIDE TIPS ARE BRAZED ONTO THE BODY

COMBINATION FLUSH / BEVEL SINGLE FLUTE BIT

FOR TRIMMING HIGH PRESSURE PLASTIC LAMINATES
FLUSH WITH EDGE OF SUBSTRATE
CAN ALSO TRIM A 22° BEVEL EDGE
REPLACEMENT BEARING # 43401



Bit Cat. No.	Bevel	A Dia.	B Flute Length	C Shank Dia.	D Shank Length
43277PC	Flush & 22°	1/2″	3/8″	1/4″	1-1/4″

FLUSH CUT TWO FLUTE BALL BEARING PILOT BITS

FOR TRIMMING HIGH PRESSURE PLASTIC LAMINATE OR CORIAN®
FLUSH WITH SUBSTRATE
REPLACEMENT BEARING #43401 - IF THREADED END IS 1/8″ USE #694476



Bit Cat. No.	Bevel	A Dia.	B Flute Length	C Shank Dia.	D Shank Length
43286PC	Flush	1/4″	1″	1/4″	1″
43276PC	Flush	3/8″	1/2″	1/4″	1″
43289PC	Flush	3/8″	1″	1/4″	1″
43252PC	Flush	1/2″	5/8″	1/4″	1″
43731PC	Flush	1/2″	1″	1/4″	1″
43730PC	Flush	1/2″	1″	1/2″	1″
43182PC	Flush	1/2″	1-1/2″	1/2″	2″

Corian® is a registered trademark of DuPont

BEADING BALL BEARING PILOT BITS

FOR DECORATIVE PERIOD EDGING
REPLACEMENT BEARING #43409



Bit Cat. No.	A Radius	B Flute Length	C Shank Dia.	D Shank Length
43410PC*	1/4″	17/32″	1/4″	1-1/4″
43413PC*	3/8″	23/32″	1/4″	1-1/4″
43416PC*	1/2″	13/16″	1/4″	1-1/4″

Many Other Router Bits Are Available
Call Your KASS Representative
For A Complete Listing

KASS
INDUSTRIAL SUPPLY CORP.

CORNER ROUND BALL BEARING PILOT BITS

FOR SMOOTH, UNIFORMLY ROUNDED EDGES
LOWER DEPTH SETTING
RESULTS IN ROUNDED CORNER WITH DECORATIVE FILLET
REPLACEMENT BEARING #43401



Bit Cat. No.	A Radius	B Flute Length	C Shank Dia.	D Shank Length
43418PC*	1/16″	5/16″	1/4″	1-1/4″
43404PC*	5/32″	1/2″	1/4″	1-1/4″
43421PC*	1/8″	5/16″	1/4″	1-1/4″
43422PC*	1/8″	5/16″	1/2″	1-1/2″
43085PC*	3/16″	1/2″	1/4″	1-1/4″
43402PC*	1/4″	17/32″	1/4″	1-1/4″
43425PC*	1/4″	17/32″	1/2″	1-1/2″
43086PC*	5/16″	9/16″	1/4″	1-1/4″
43405PC*	3/8″	5/8″	1/4″	1-1/4″
43427PC*	3/8″	5/8″	1/2″	1-1/2″
43408PC*	1/2″	3/4″	1/4″	1-1/4″
43091PC*	1/2″	13/16″	1/2″	1-1/2″
43108PC*	5/8″	15/16″	1/2″	1-1/2″
43092PC*	3/4″	1″	1/2″	1-1/2″
43431PC*	7/8″	1-1/8″	1/2″	1-1/2″
43428PC*	1″	1-1/4″	1/2″	1-1/2″

*New chip limiting design provides better control

ROMAN OGEE REVERSE CURVE BALL BEARING PILOT BITS

FOR DECORATIVE EDGING AND FURNITURE
LOWER DEPTH SETTING
RESULTS IN ADDITION OF FILLET



Bit Cat. No.	A Overall Diameter	B Flute Length	C Radius	D Shank Dia.	E Shank Length
43126PC*	1-3/16″	1/2″	5/32″	1/4″	1-1/4″
43127PC*	1-1/2″	25/32″	1/4″	1/4″	1-1/4″
43133PC*	1-1/2″	25/32″	1/4″	1/2″	1-1/2″

COVE BALL BEARING PILOT BITS

FOR CUTTING DECORATIVE EDGING, INVERTED RADII, WHERE SMOOTHER FINISH IS DESIRED



Bit Cat. No.	A Radius	B Flute Length	C Shank Dia.	D Shank Length
43102PC*	1/4″	1/2″	1/4″	1-1/4″
43103PC*	3/8″	9/16″	1/4″	1-1/4″
43104PC*	1/2″	21/32″	1/4″	1-1/4″

ROUTER ACCESSORIES & DOOR HANGING KITS

HINGE BUTT TEMPLATE KIT

59381

STRIKE & LATCH PLATE TEMPLATE KIT

59375

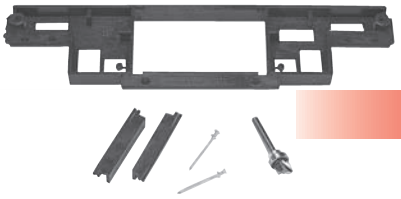

DOOR HINGE TEMPLATE KIT

59370

MICRO EDGE GUIDES

42690	42700
FOR USE WITH MODELS 100, 690, 690LR, 690LRVS, 691 and 693	FOR USE WITH MODELS 7518, 7519, 7529, 7536, 7537, 7538 and 7539

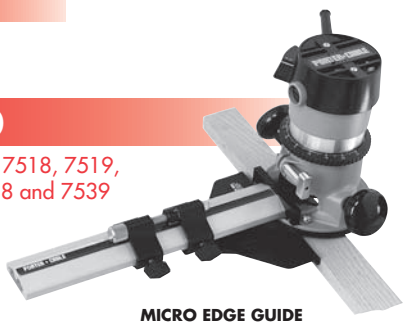

MICRO EDGE GUIDE SHOWN WITH ROUTER

1/4″ COLLET	3/8″ COLLET	1/2″ COLLET
42999	42975	42950

Toll Free to Bronx, New York 800-255-0910

18V LITHIUM DRILL KIT

PCL180DRK-2

- 0-350/0-1,200 RPM
- 24 Clutch Settings; 325 in. lbs. torque
- 1/2" metal single sleeve chuck offers excellent bit retention and durability
- 2 position gearbox with high speed for drilling and driving and low speed for high torque applications
- Integrated LED worklight on drill illuminates darkened work areas
- At only 3.8 lbs. this drill/driver reduces user fatigue when using for extended periods
- With a length of only 8.5", the drill easily fits into tight areas not accessible by larger units
- Lithium Ion batteries hold charge for extended periods even after being stored for extended periods
- Fast Charger recharges batteries in 30 minutes to minimize downtime and controls charge to extend performance of the cells
- Compatible with any 18V Porter Cable slide back battery, regardless of chemistry
- Kit Includes: The Compact Drill/Driver (PCL180D), (2) Lithium Ion batteries, Lithium Ion fast charger, (1) double ended bit tip and soft sided carrying case

18V LITHIUM 3 TOOL COMBO KIT

PCL318IDC-2

PCL180D
DRILL/DRIVER

- Variable Speed 0-350 RPM / 0-1,200 RPM; 325 in. lbs. of torque
- At only 3.8 lbs. this drill/driver reduces user fatigue when using for extended periods
- 2 position gearbox with high speed for drilling and driving and low speed for high torque applications
- 1/2" metal single sleeve chuck offers excellent bit retention and durability

PCL180ID
IMPACT DRIVER

- 0-2,900 RPM / 0-2,800 BPM
- Delivers 1,600 in. lbs. high-torque output without kick-back
- With a length of only 6.5", the impact driver fits into tight areas
- Features a heavy-duty cold forged impact block designed for maximum durability

PCL180L
FLASHLIGHT

- 5 W flashlight provides powerful light and up to 3 hours of runtime

In addition to the tools, the kit includes: (2) Porter Cable 18V Lithium Batteries that provide extended runtime for larger projects, Lithium Ion Fast Charger that recharges batteries in 30 minutes, (1) double ended bit tip, (1) PH #2 screw bit and soft sided carrying case.

18V LITHIUM 4 TOOL COMBO KIT

PCL418C-2

PCL180D
DRILL/DRIVER

- Variable Speed 0-350 RPM / 0-1,200 RPM; 325 in. lbs. of torque
- At only 3.8 lbs. this drill/driver reduces user fatigue when using for extended periods
- 2 position gearbox with high speed for drilling and driving and low speed for high torque applications
- 1/2" metal single sleeve chuck offers excellent bit retention and durability

PCL186CS
CIRCULAR SAW

- Powerful 3,700 RPM
- Provides more efficient cutting and greater cutting capacity

PCL180RS
RECIPROCATING SAW

- Powerful 3,000 SPM
- Compact saw allows cutting in tight areas difficult to access with larger saws
- Tool free blade clamp permits blades to be removed and inserted quickly and easily

PC180FL
PIVOTING HEAD FLASHLIGHT

- Pivoting head adjustable flashlight allows beam to be positioned in any orientation
- 5 W flashlight provides powerful light and up to 5 hours of runtime.

In addition to the tools, the kit also includes: (1) 18V Compact Lithium Battery, (1) 18V Extended Runtime Lithium Battery, Lithium Ion Fast Charger, (1) double ended bit tip, (1) 18T carbide tip circular saw blade, (1) 6" wood cutting reciprocating blade and soft sided carrying case.

10 GALLON WET / DRY VACUUM

7812

- Power – 120 VAC
- 9 Amps – Unit only
- 15 Amps – With tool
- Capacity: 10 gal., liquid or solids
- Large wheels for easy maneuvering
- Corrosion resistant polypropylene tank
- Convenient flat top surface tray for holding tools while working
- 15 second vacuum overrun to clear hose when tool is turned off
- Dual filtration system with washable automotive-type paper filter and 2-ply ten-gallon paper filter bag for dust pick-up

DELIVERS 99.85% FILTRATION EFFICIENCY GREAT FOR FINE PARTICULATE PICK-UP, LIKE DRYWALL OR SOLID-SURFACE DUST

- Built-in outlet for use with power tools— vacuum starts automatically when tool is turned on
- Includes: hose & operating manual

DRYWALL SANDER WITH DUST COLLECTION

7800

- 3.5 Amps, 1,400-2,000 RPM
- Variable speed
- Built in dust collection hose
- Compression type pad mount
- Includes: 8-7/8" foam-backed sanding pad, 13' static-dissipating 1-1/4" vacuum hose, hook & loop straps for mounting power cord to vacuum hose & operating manual-vacuum not included

ELECTRIC GENERATORS

CH350IS

3500 WATTS
6.5 HP, SURGE WATTS: 7,500
TANK CAPACITY: 4 GAL.

CIRCUIT BREAKER PROTECTION

- 6.5 Honda GX200 OHV engine with compression release for easy recoil start, Cast-iron cylinder sleeve and Low oil protection
- 4 gallon fuel tank provides 11.6 hours of run time at 1/2 load and 7.8 hours at full load
- Advanced alternator design featuring no brushes to replace, rugged all-metal construction, ball bearings for long life and rubber isolators to reduce vibration
- Special features: Idle control saves fuel and reduces noise, hour meter for maintenance scheduling and full power selector switch for maximum 120 VAC motor starting
- Includes: operating manual

ELECTRIC GENERATORS

H450IS-W

4500 WATTS
9.0 HP, SURGE WATTS: 8,500
TANK CAPACITY: 7 GAL.

CIRCUIT BREAKER PROTECTION

- 9 HP Honda GX270 OHV engine with compression release for easy recoil start, Cast-iron cylinder sleeve and Low oil protection
- 7 gallon fuel tank provides 13.4 hours of run time at 1/2 load and 8.7 hours at full load
- Advanced alternator design featuring no brushes to replace, rugged all-metal construction, ball bearings for long life and rubber isolators to reduce vibration
- Special features: Idle control saves fuel and reduces noise, hour meter for maintenance scheduling, full power selector switch for maximum 120 VAC motor starting, fuel gauge and lift kit
- Includes: Portability kit with 10" pneumatic tires and operating manual

Toll Free to Bronx, New York 800-255-0910

CIRCULAR SAWS

7-1/4" CIRCULAR SAW

- Powerful 15 AMP motor
- Lower guard design improves performance when making bevel and narrow cuts
- Large cutting capacity (2-1/2" at 90°, 1-3/4" at 45° and 1-3/8" at 56°)
- Bevel cuts 0°-56° with positive stops at 22.5°, 45° and 56°
- Ball bearing construction for a longer tool life
- Includes: Carbide tipped blade, blade wrench, rip fence and plastic tool case

5007NK

7-1/4" HYPOID SAW

- Powerful 15 AMP motor
- Hypoid gears deliver more power and greater surface contact
- Oil bath technology and sealed gear housing for less maintenance
- Large cutting capacity (2-3/8" at 90°; 1-3/4" at 45° and 1-9/16" at 50°).
- 0° - 51.5° bevel capacity with positive stops at 45° and 51.5°
- Push button spindle lock for easy blade changes
- Includes: 24T thin kerf carbide tipped blade and blade wrench

5477NB

7-1/4" MAGNESIUM CIRCULAR SAW

- Powerful Makita built motor delivers 2,300 Watts; 5,200 RPM
- Two built-in L.E.D. lights illuminates the line of cut for increased accuracy
- Magnesium components create a tough and well balanced lightweight saw (10.1 lbs.)
- Large cutting capacity (2-1/2" at 90°) and bevel capacity (0-56°) with positive stops at 22.5° and 45°
- Make quick, one-handed adjustments using large, rubberized levers
- Includes: carbide-tipped blade, hex blade wrench, rip fence and tool case

5007MG

7-1/4" CIRCULAR SAW WITH LED LIGHT

- Powerful 15 AMP motor
- Electric brake for maximum productivity
- L.E.D. light illuminates the line of cut
- Well balanced design for superior handling and performance
- Bevel cuts 0-56° with positive stops at 22.5° and 45°
- Flat motor housing design increases stability when changing blades
- Includes: general contractor blade, allen key #6, rip fence and plastic tool case

5007NFAK

8-1/4" MAGNESIUM CIRCULAR SAW

- Powerful Makita built motor delivers 2,300 Watts; 5,200 RPM
- Two built-in L.E.D. lights illuminate the line of cut for increased accuracy
- Electric brake for maximum productivity
- Magnesium components create a tough and well balanced lightweight saw (10.6 lbs.)
- Large cutting capacity (3" at 90°) and bevel positive stops at 22.5° and 45°
- Make quick, one-handed adjustments using large, rubberized levers
- Includes: carbide-tipped blade, blade wrench and rip fence

5008MGA

Headquarters
BRONX, NEW YORK
Ph: 718-299-6060 • Fx: 718-299-1593
Toll Free: 800-255-0910

makita INDUSTRIAL POWER TOOLS

MITER SAWS AND TABLE SAW

10" TABLE SAW WITH STAND

- Powerful 15 AMP; 4,800 RPM for smooth cutting
- Electric brake for maximum productivity
- Large cutting capacity (3-5/8" at 90° and 2-1/2" at 45°) can rip 4x material in one pass; can use up to a 13/16" dado blade
- Tool-Less Modular Blade Guard System includes an adjustable riving knife/spreader
- Blade guard assembly with cam lock provides easy tool-less installation or removal
- Split side guard design allows for ease of measurement from the blade to the rip fence for cutting set ups.
- Two on board independent stowable Anti-kickback pawls and riving knife/spreader for through cuts
- Includes: portable saw stand for easy jobsite portability, 32T carbide tipped blade, rip fence, miter gauge, push stick, portable saw stand and wrench #5

2705X1

12" DUAL SLIDE COMPOUND MITER SAW WITH LIGHT

- Powerful 15 AMP motor delivers 3,200 RPM
- Built-in high output, fluorescent light lasts 2,000 hours on average
- Dual steel rails with two linear ball bearings for stable, vibration-free cutting
- 9 positive stops at 15°, 22.5°, 31.6°, 45° left or right and at 0°
- Bevel positive stops at 33.9° and 45° left with 45° right
- Smooth easy slide system allows cross cuts up to 12-1/8" wide
- Includes: 70T carbide-tipped blade, vertical vise, 2 ea. extension wing, sub-Fence (right), dust bag, socket wrench #13 and triangular rule

LS1214F

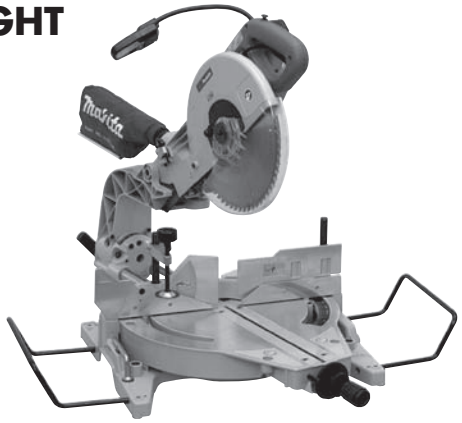

10" DUAL COMPOUND MITER SAW WITH LASER

- Powerful 15 AMP direct drive motor delivers 3,200 RPM with soft start
- Built-in laser clearly indicates line of cut with micro fine adjustments
- Independent switch allows laser to be seen with and without the blade rotating
- Compact design with a patented 4-Steel Rail Sliding System
- Exclusive 6 linear ball bearings deliver smooth, solid, and adjustment-free "dead-on" accurate cuts
- Miters 0°-52° left and 0°-60° right, with positive stops at 0°, 15°, 22.5°, 31.6°, and 45° (left and right)
- Increased capacity for up to 6-5/8" crown molding (vertically nested), 4-3/4" baseboard (vertical), and 12" cross cuts at 90°
- Includes: 10"x 5/8" 60T TCT Saw Blade

LS1016

CUT-OFF SAWS AND OUTDOOR POWER CUTTERS

12" METAL CUTTING SAW

- 1,300 RPM; 15 AMP motor
- D-shape handle for easy gripping
- Lock-off button prevents accidental starting
- "Tool-less" guide plate adjusts 0 - 45°
- Shaft lock for easy blade changes with just one wrench
- Maximum cutting depth of 4-1/2" with carbide tipped blade
- Includes: carbide tipped blade, socket wrench & switch button

LC1230

14" CUT-OFF SAW

- 3,800 RPM
- D-shape handle for easy gripping
- Lock-off button to prevent accidental starting
- Guide plate adjusts 45° right and left - 3 locations for various sizes of materials
- Quick release vise for secure stock retention and fast repeated cut-offs
- Includes: 1 ea. abrasive wheel, socket wrench, 2 ea. switch button

2414NB

CUT-OFF SAW ACCESSORIES

CARBIDE TIPPED METAL BLADE

- For ferrous metals: pipe (black & cast iron), channel, angle iron, tubing (rd., sq., rec.), conduit, threaded rod, Unistrut™
- Fast, virtually burr-free cuts and leaves material cool to touch

Cat. No.	Size	Teeth	Pkg. Qty.
A-90897	12"	60	1

FERROUS METAL ABRASIVE CUT-OFF WHEELS

- For all ferrous materials (steel, cast iron & other metals)

Cat. No.	Size	Grit	Pkg. Qty.
724603-3	14" x 1/8" x 1"	A36P	5
724603-3-25	14" x 1/8" x 1"	A36P	25

OUTDOOR POWER CUTTERS

DPC7320
12"
64 CC./5.7 HP

DPC7331
14"
73 CC./5.7 HP/9,350 RPM

DPC8132
16"
81 CC./6.2 HP/9,350 RPM

- Five-stage, foam-paper-nylon system with Advanced Directional
- Air Flow provides very clean air for better saw performance
- Reinforced aluminum blade guard with 70° range of limitless positioning using a marked knob handle
- Improved ignition system with larger flywheel and rare earth magnets for more power
- Cutting arm position simply changes from center position to flush position for cuts adjacent to curbs and walls
- Cushioned operator grips with 4 vibration-absorption rubber buffers for increased operator comfort
- Water kit is assembled to saw and can be used with garden hose, gravity tank or pressure tank
- All models includes: abrasive wheel, universal wrench, torx key, screwdriver, adapter ring,
- Optional Accessories: dolly w/ water tank (DT2000)

Headquarters
BRONX, NEW YORK
Ph: 718-299-6060 • Fx: 718-299-1593
Toll Free: 800-255-0910

makita INDUSTRIAL POWER TOOLS

ANGLE CUTTERS AND GRINDERS

6" CUT-OFF / ANGLE GRINDER

- Powerful 13 AMP motor design delivers 10,000 RPM
- Super Joint System (SJS) helps prevent gear damage
- Gear housing rotates 90° for operator convenience
- Refined Design at only 4.2 lbs.
- Large ergonomic paddle-switch for operator comfort
- Labyrinth construction seals the motor from dust and debris
- Includes: cutting wheel, wheel guard, lock nut, lock nut wrench, side handle and inner flange

9566PC

4-1/2" ANGLE GRINDER

9557NB

- Powerful 7.5 AMP motor delivers 10,000 RPM
- Small 2-1/2" circumference barrel grip for added comfort
- Protective zig-zig varnish seals motor from contaminants by forming a barrier under rotation
- Labyrinth construction seals protects the motor and bearings from dust and debris
- All ball bearing design and metal gear housing for durability
- Rotatable gear housing rotates 90° for cutting applications
- AC/DC switch for use with alternative power sources
- Includes: grinding wheel, wheel guard, lock nut, lock nut wrench, side handle and inner flange

* Also available with paddle switch for easy operation.

4-1/2" ANGLE GRINDER

9564CV

- Improved 12 AMP motor design delivers 2,800-10,500 RPM
- 5 stage variable speed control dial for matching the RPM to the work
- Larger and improved carbon brush material for longer tool life
- Electronic limiter stops the motor and reduces accidental motor overload and burnout
- "Tool-less" wheel guard adjustment for easy clamping
- Labyrinth construction seals protects the motor and bearings from dust and debris
- Includes: grinding wheel, wheel guard, lock nut, lock nut wrench, side handle and inner flange

4-1/2" ANGLE GRINDER

GA4530

- Powerful 6.0 AMP motor delivers 11,000 RPM
- Small 2-1/4" circumference barrel grip for added comfort
- Refined design at only 3.1 lbs for increased control
- Labyrinth construction seals protects the motor and bearings from dust and debris
- Rotatable gear housing can be positioned every 90° for cutting applications
- All ball bearing design and metal gear housing for added durability
- Includes: grinding wheel, wheel guard, lock nut, lock nut wrench, side handle and inner flange

4-1/2" ANGLE GRINDER

9564PC

- Powerful 13 AMP motor design delivers 11,500 RPM
- Super Joint System (SJS) helps prevent gear damage
- Gear housing rotates 90° for operator convenience
- Refined design at only 4.2 lbs.
- Labyrinth construction seals the motor from dust and debris
- Large ergonomic paddle-switch for operator comfort
- Tool-less wheel cover for easy wheel change
- Includes: grinding wheel, tool-less guard, lock nut, lock nut wrench, side handle and inner flange

SUPER JOINT SYSTEM SJS

5" ANGLE GRINDER

9005B

- 9 AMP motor delivers 10,000 RPM
- Light weight at 6.6 lbs. for high production with less fatigue
- Removable side handle installs on either side of tool
- Spindle lock for easy accessory changes
- AC/DC for use with alternative power sources
- Lock-on button for continuous use operation
- Standard 5/8" - 11 UNC spindle
- Ball bearing construction, Double insulated
- Includes: grinding wheel, wheel guard, side handle, inner flange, lock nut, lock nut wrench and spindle washer

5" ANGLE GRINDER

GA5020

- Powerful 11 AMP motor design delivers 11,000 RPM
- SJS Technology prevents Tool Kickback caused by Accidental Wheel Binding
- Electric Brake provides higher work efficiency for the operator
- Gear housing rotates 90° for operator convenience
- Refined Design at only 4.8 lbs.
- AC/DC switch for use with alternative power source
- Labyrinth construction seals the motor from dust and debris
- Includes: grinding wheel, tool-less guard, lock nut, lock nut wrench, side handle and inner flange

SUPER JOINT SYSTEM SJS

SANDERS AND POLISHERS

4" ELECTRONIC WET STONE POLISHER

- Powerful 7.9 AMP motor
- Soft-Start feature for smooth start-up, variable speed
- Pre-setting dial (2,000 - 4,000 RPM) for optimum speed
- High power-to-weight ratio for reduced operator fatigue
- 3 holes at the spindle top evenly spread water to the pad
- Overload switch to protect armature failure
- Includes: a ground fault circuit interrupter (GFCI) plug, head cover and wrench

PW5001C

7" VARIABLE SPEED ELECTRONIC SANDER - POLISHER

SHOWN WITH OPTIONAL WOOL BONNET

- 11 AMP motor delivers fast and powerful clearcoat polishing
- Variable speed, 0-3,000 RPM with pre-set maximum speed dial
- Pre-set speed setting dial from 600-3,000 RPM
- Electronic speed control maintains constant speed under load
- Easily converts to a sander
- Lock-on button for continuous use at one speed
- Includes: polishing kit, hook-and-loop pad, hex wrench, hoop handle and side handle

9227CX3

5" RANDOM ORBIT SANDER

- Smooth and fast sanding with 3.0 AMP motor (12,000 OPM)
- Large 1/8" random orbit action for fast and super smooth sanding
- Pad control system for controlled pad speed upon start-up
- Efficient through-the-pad dust collection system for a cleaner environment
- Rubberized grip for improved operator comfort and control
- Uses quick change 5" (8-hole) hook-and-loop abrasive paper
- Includes: 1ea. abrasive discs, dust bag and plastic case

BO5030K

5" VARIABLE SPEED RANDOM ORBIT SANDER

* Smooth Finish 3 AMP with Variable Speed Control 4,000-12,000 RPM
* Large 1/8" Random Orbit Action for Fast and Super Smooth Sanding
* Pad Control System for Controlled Pad Speed Upon Start-up
* Efficient Through-the-Pad Dust Collection System for a Cleaner Work Environment
* Uses Quick Change 5" (8-Hole) Hook-and-Loop Abrasive Paper
* Includes: 1ea. abrasive discs, dust bag and case

BO5031K

5" DISC SANDER

- 4,500 RPM
- Ball and needle bearing construction
- Lock-on button for continuous operation
- Powerful 3.6 AMP motor for maximum sanding
- Motor over pad design for better balance and control
- Includes: 1 ea. abrasive disc #80, plastic pad, side handle & hex wrench

GV5000

HALF SHEET FINISHING SANDER

- Variable speed control dial (4,000 - 10,000 OPM)
- Integrated Through-the-Pad Dust Collection System
- Uses either 4-1/2" x 9" hook-and-loop or 4-1/2" x 11" half sheet abrasive paper
- Easily hooks up to a vacuum hose for superior dust collection
- Ergonomically designed contoured grips
- Large cam-lock clamping lever for easy abrasive paper changes
- Includes: Disposable dust bag, Pad Set, Paper Dust Bag Holder and 1 ea. Abrasive Paper #120

BO4900V

3" X 24" BELT SANDER

- Powerful 7.8 motor delivers 1,300 ft/min belt speed
- Low Profile Balanced Design and less gouging
- Highly efficient dust collector
- Extended base to allow flush sanding
- Replaceable ceramic wear plate for easy maintenance
- Extra long cord for operator convenience
- Easy lever control to change belts
- Ball bearing construction, Double insulated

9924DB

KASS
INDUSTRIAL SUPPLY CORP.
Headquarters
BRONX, NEW YORK
Ph: 718-299-6060 • Fx: 718-299-1593
Toll Free: 800-255-0910

makita INDUSTRIAL POWER TOOLS

WOODWORKING PLANER & ACCESSORIES

3-1/4" PLANERS

- Planes up to 3-1/4" wide and 5/32" deep in a single pass
- Powerful 7.5 AMP motor yet light-weight at 7.2 lbs.
- 2-Blade cutter head for fast stock removal; 16,000 RPM
- Chip ejection can be directed to either side of the tool for convenience
- Includes: blade gauge assembly, socket wrench, guide rule, depth guide and double edged tungsten-carbide planer blade set

KP0810

- Centerline balance with front and rear grips positioned for better control
- High power-to-weight ratio (4 AMPS; 5.5 lbs.)
- Simple blade setting system for fast blade installation
- Lock-on button for continous operation
- Double-edged carbide blades for long life and smooth cutting
- Precision machined base for smooth and accurate planing

1902

PLANER ACCESSORIES

TUNGSTEN-CARBIDE PLANER BLADE

- 2 per package
- Long lasting tungsten carbide
- Specially designed for fast and smooth planing

Cat. No.	Size
731201-6	3-1/4"

DOUBLE EDGED TUNGSTEN-CARBIDE PLANER BLADE

- 2 per package • To use with set plate 343433-9

Cat. No.	Type
793322-2	Blade only

HIGH-SPEED STEEL PLANER BLADE

- 2 per package
- Made of fine grade steel
- Specially designed for fast and smooth planing

Cat. No.	Size
731001-4	3-1/4"

ROUTERS

2 1/4" H.P. ROUTER

RF1101

- Powerful 11 AMP motor, 2.25 Max HP
- Variable speed; 8,000 - 24,000 RPM
- Quietest (81dB) and Lowest Vibration Router in its Class
- Electronic speed control maintains constant speed under load
- Soft start feature for smooth start-ups
- Large calibrated depth control ring for easy depth adjustment
- Accepts 1/2" and 1/4" shank bits
- Includes: 1/4" collet, 1/2" collet, 2 ea. wrench

1-1/4" HP PLUNGE ROUTER

RP0900K

- Powerful 8 AMP motor delivers 27,000 RPM
- Up to 1-3/8" plunge depth capacity for easy penetration
- Plunge depth adjustment knob with 3 preset depth stops
- Oversized ball bearing construction for long tool life
- Easy-to-read depth scales
- Uses 1/4" shank routers bits
- Includes: straight guide, (2) wrenches and tool case

3-1/4 HP HP PLUNGE ROUTER

RP2301FC

- Powerful 15 AMP variable speed motor delivers 9,000 - 22,000 RPM
- Up to 2-3/4" Plunge depth capacity for easy penetration into work piece
- Electric brake for increased productivity
- Three preset depth stops for added precision
- Built-in twin L.E.D. lights illuminate the work area
- Uses 1/4" and 1/2" shank routers bits
- Includes: 1/2" Collet cone, 1/4" Collet sleeve insert, extended depth adjustment knob and wrench

Makita INDUSTRIAL POWER TOOLS

JIG SAWS WITH L.E.D. LIGHTS

- Illuminate your work with on board L.E.D light for increased visibility
- AVT° Anti-vibration technology reduces over 40% of vibration and noise than competitors
- Powerful 6.3 AMP motor with straight cutting and 3 orbital settings
- Electronic variable speed control; 800-2,800 SPM
- Fast and easy, Patented tool-less blade change system
- Base adjusts up to 45° right or left and positive stop at 90°
- Built-in dust blower clears the line of cut for greater accuracy
- Ergonomically designed rubberized top handle grip
- Uses Tang shank blades only
- Includes: 2 ea. blade set, anti-splintering device, cover plate and plastic case

TOP HANDLE JIG SAW

4350 FCT

BARREL GRIP JIG SAW

4351 FCT

RECIPROCATING SAWS

JR3050T

- Powerful 9 AMP motor; 0-2,800 SPM
- Variable speed for increased cutting efficiency
- Long 1-1/8" stroke for faster cutting
- Internal dust blower system clears debris from the line of cut
- Heavy-duty shoe features tool-less adjustment
- All ball and needle bearings for longer tool life
- Includes: 1 ea. blade and plastic tool case

JR3060T

- Powerful 12 AMP motor; 0-2,800 SPM
- Variable speed for increased cutting efficiency
- Long 1-1/4" stroke for faster cutting
- All ball and needle bearings for longer tool life
- Tool-less blade change and shoe adjustment
- Externally accessible brushes for easy maintenance
- Includes: 1 ea. blade and plastic tool case

JR3070CT

- Powerful 15 AMP motor; 0-2,800 SPM
- Electronic speed control maintains constant speed under load
- 4-position orbital/straight cutting action
- Variable speed dial for presetting maximum speed
- Unique clutch assembly helps protect the gears should the blade bind
- Long 1-1/4" stroke for faster cutting
- Tool-less blade change and shoe adjustment
- Includes: 1 ea. blade and plastic tool case

Headquarters
BRONX, NEW YORK
Ph: 718-299-6060 • Fx: 718-299-1593
Toll Free: 800-255-0910

makita INDUSTRIAL POWER TOOLS 3/8" DRILLS

3/8" REVERSIBLE VARIABLE SPEED DRILLS

- 0-2,500 RPM
- 4.9 AMP motor
- Low 79dB decibel rating
- Large trigger switch for easy operation
- In-line handle design for better control
- Large recessed lock-on button
- Reversing switch is conveniently located
- All ball bearing construction

6407

- Includes: drill chuck & chuck key

6408K

- Includes: keyless chuck & plastic tool case

3/8" REVERSIBLE VARIABLE SPEED ANGLE DRILL WITH L.E.D. LIGHT

DA3010F

- 0 - 2,400 RPM
- Powerful 4.0 AMP motor
- Built-in shock proof, high output, white L.E.D. light illuminates drilling area and increases visibility with a bulb that never needs replacing
- Ball bearing construction for longer motor life
- Includes: grip complete, chuck key and key holder

NEW

DRYWALL SCREWDRIVER

- Powerful 6.0 AMP motor with 0-4,000 RPM
- Lightest drywall gun in its class at only 2.9 lbs.
- Large variable speed trigger with lock-on button for continuous use
- L.E.D. light illuminates the work surface
- Consistent screw depth with Sure-Lock° adjustable depth locator assembly
- Convenient bit storage on base of grip reduces downtime
- Metal reinforced belt clip for increased durability
- Includes: #2 phillips insert bit and magnetic bit holder

FS4200

1/2" DRILLS

1/2" REVERSIBLE VARIABLE SPEED DRILL

- 0-550 RPM
- Powerful 6.5 AMP motor
- Heavy duty 1/2" drill chuck
- Large and conveniently located reversing switch and lock-on button
- Side handle can be attached to either side of the tool for better control
- Includes: drill chuck, chuck key & side handle

6302H

1/2" SPADE HANDLE DRILL

- 500 RPM
- Powerful 9.0 AMP motor
- Rocker-type reversing switch
- Durable all-metal motor housing
- Ball bearing construction for smooth operation
- Large trigger switch and D-handle rotates 360°
- 12" pipe handle with rubberized grip
- Externally accessible brushes for easy replacement
- Includes: side handle, drill chuck and chuck key

DS4000

1/2" REVERSIBLE SPADE HANDLE DRILL

DOUBLE GEAR REDUCTION FOR ADDED TORQUE

- 550 RPM
- 6.3 AMP motor
- D-handle rotates 360°
- Ball bearing construction
- Rocker type switch for easy one-handed forward or reverse operation
- Heavy duty industrial 1/2" drill chuck
- To prevent loss, chuck key is retained in handle
- Includes: top handle, drill chuck & chuck key

6013BR

1/2" REVERSIBLE VARIABLE SPEED ANGLE DRILL

- Low 0 - 400 RPM; high 0-900 RPM
- Powerful 7.5 AMP motor
- All ball bearing construction
- Angle attachment rotates 360°
- Includes: drill head handle, side handle, drill chuck, chuck key, key holder, hex wrench and plastic tool case

DA4000LR

1/2" REVERSIBLE TWO SPEED ANGLE DRILL

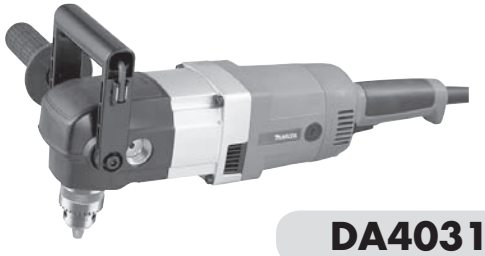

DA4031

- Low 300 RPM; high 1,200 RPM
- "Sidewinder" handle rotates 90° left or right
- Powerful 10 AMP motor
- Strong supportive side handle with hex wrench storage
- Adjustable top handle with hex wrench storage for easy positioning
- Includes chuck key, key holder, drill chuck, hex wrench, side handle grip and plastic tool case

Headquarters
BRONX, NEW YORK
Ph: 718-299-6060 • Fx: 718-299-1593
Toll Free: 800-255-0910

makita INDUSTRIAL POWER TOOLS

ROTARY AND DEMOLITION HAMMERS

11/16" ROTARY HAMMER

- 4.2 AMP; variable speed 0-1, 500 RPM; 0-5,000 BPM
- L.E.D. Light illuminates drilling surface for more accurate work
- Dual operation mode; rotation only and hammering with rotation
- Ideal for overhead applications and working in confined areas
- Ergonomic and well-balanced design (3.7 lbs.)
- Recessed lock-on button for continuous use
- Includes: side handle, depth gauge, plastic carrying case

HR1830F

3/4" HAMMER DRILL

- Powerful 8.2 AMP motor; 0 - 2, 900 RPM; 0 - 58,000 BPM
- 2-Mode switch delivers hammering with rotation and rotation only
- Built-in Torque Limiter stops bit rotation to prevent kick-back
- Large trigger switch and 360° swivel side handle for added comfort
- Lightweight (5.3 lbs.), ergonomic and well balanced design
- Built-in shock-proof, high output, white L.E.D. light
- LED light never needs replacing throughout the life of the tool
- Includes: side handle, depth gauge, chuck key and tool case

HP2070F

1" D - HANDLE ROTARY HAMMER

- Powerful 7 AMP motor
- 0-1,100 RPM & 0-4, 500 BPM
- Accepts SDS-PLUS Bits
- 40 different bit angle settings
- 3-mode operation: "rotation only", "hammering with rotation" and "hammering only"
- Built-in Torque Limiter ensures stable torque control
- "No Hammering When Idling" function
- Includes: side handle, depth gauge and plastic tool case

HR2475

1-1/8" ROTARY HAMMER

- 6.7 AMP; 0-1,100 RPM; 0-4,500 BPM
- L.E.D. Light illuminates drilling surface for more accurate work
- 3-Mode Operation: rotation only, hammering only and hammering with rotation
- Powerful, compact, ergonomic design with padded grip
- Recessed Lock-on button for continuous use
- "No Hammering When Idling" function ensures extra-low vibration under no load
- Includes: side handle, depth gauge, plastic carrying case

HR2811F

1-9/16" SDS-MAX ROTARY HAMMER

- Powerful 11 AMP motor; efficient 1,350 - 2,750 BPM
- Preset variable speed dial with 5 settings
- Counterbalance system reduces vibration to only 4.5 m/s2
- One touch sliding chuck accepts SDS-MAX hammer steel
- 2-mode switch for "hammering only" or "hammering with rotation"
- L.E.D. power light indicates switch failure, cord breakage or carbon brush replacement
- 16.4 ft. jobsite cord for greater versatility
- Includes: side handle, D-handle, depth gauge, tool case and bit grease

HR4010C

AVT™ Anti Vibration Technology

1-3/4" ROTARY HAMMER

- Powerful 13.5 AMP motor; 1,250-2,750 BPM handles the demanding jobs
- 2-mode operation "hammering with rotation & hammering only" for multiple applications
- Electronic variable speed control allows user to set the speed based on the application
- Carbon brushes is greater than twice that of competitive models
- One touch sliding chuck for easy bit installation and removal
- Built-in Torque Limiter ensures stable torque control
- Includes: side handle, D-handle, depth gauge, plastic carrying case, grease

HR4510C

AVT™ Anti Vibration Technology

2" SDS-MAX ROTARY HAMMER

- Powerful 15 AMP motor; efficient 1,075-2,150 BPM
- No hammering while idling ensures longer life of tool
- One touch sliding chuck allows for quick bit changes
- Soft grip provides more comfort and greater control
- Recessed operation mode switch prevents it from being damaged
- Built-in Torque Limiter ensures stable torque control
- Includes: side handle, D-handle, depth gauge, plastic carrying case and bit grease

HR5210C

AVT™ Anti Vibration Technology

makita INDUSTRIAL POWER TOOLS

DEMOLITION HAMMERS

20 LB. DEMOLITION HAMMER

- Powerful 13.0 AMP motor
- Electronic Variable Speed Control
- Hard hitting 950-1,900 BPM; ideal for horizontal work
- Rubber D-shaped side handle adjusts to 8 different positions
- One touch sliding chuck for easy bit installation and removal
- 12 angle settings of bit; Accepts SDS-Max bits
- Dust proof chuck cap protects tool from damage from dust and debris
- Service reminder light indicates when to replace carbon brushes
- Includes: bit grease, bull point and plastic tool case

HM1202C

35 LB. DEMOLITION HAMMER

- 35 lbs. for Both Horizontal and Vertical Applications
- Powerful 13.0 AMP motor; 1,450 BPM
- Accepts popular 1-1/8" hex hammer steel
- Side handle swivels 360 degrees and adjusts to several postitions
- Convenient lock-on button for continuous operation
- Comfortable ergonomically designed rubber grip
- Low noise level at only 103 dB
- Lowest vibration level in its class at 16 (meters/second)
- Includes: steel tool case

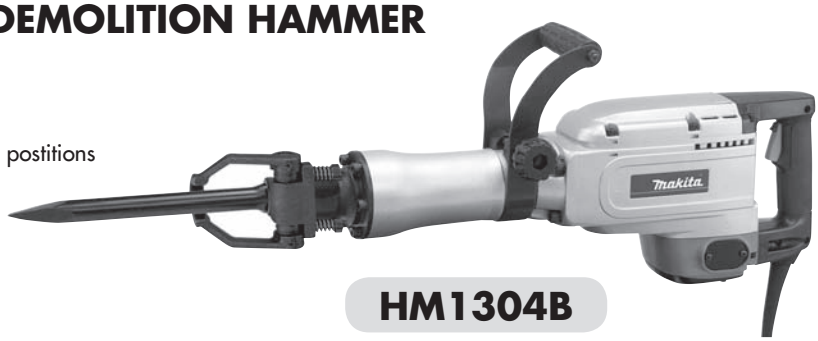

HM1304B

IMPACT WRENCHES

1/2" DRIVE IMPACT WRENCH

TW0350

- 0-2,000 IPM; 0-2,000 RPM for maximum efficiency
- High max torque of 260 ft.lbs. for demanding applications
- Efficient impact system with less vibration
- Impact resistant aluminum gear case
- Compact length for easy handling
- Externally accessible brushes for easy replacement
- Ergonomically designed rubberized grip
- Includes: belt clip and plastic carrying case

3/4" REVERSIBLE SQUARE DRIVE IMPACT WRENCH

6906

- 1,600 IPM
- 1,700 RPM
- Maximum Torque of 433 ft.lbs.
- Powerful 9 AMP motor for heavy duty applications
- Precision gearing plus ball and needle bearing construction for smooth and efficient power transmission
- Rocker type reversing switch for easy one-handed forward or reverse operation
- Side handle adjusts 360° for operator convenience at any angle
- Externally accessible brushes for easy inspection and replacement
- Includes: side handle and steel tool case

1" IMPACT WRENCH

TW1000

- 1,500 IPM; 1,400 RPM
- Powerful 12 AMP motor with 738 ft. lbs. torque
- 1" square drive capacity for heavy-duty applications
- Efficient impact system with less vibration
- Durable gear housing protected with rubber boot
- Rocker type forward/reverse switch for one-handed operation
- Externally accessible brushes and ball bearings
- Ergonomically designed rubberized grip
- Side handle rotates 360° for operator convenience
- Includes: side handle and tool case

Headquarters
BRONX, NEW YORK
Ph: 718-299-6060 • Fx: 718-299-1593
Toll Free: 800-255-0910

makita INDUSTRIAL POWER TOOLS

AIR COMPRESSOR - 2.0 HP

MAC700

- 12.4 AMPS / 0-130 Operating Pressure
- High output Cast Iron Pump with Big Bore cylinder and piston
- Substantially lower noise levels (80 dB) with a large 1,720 RPM pump
- Low Amp draw reduces incidences of tripped breakers and voltage drop
- Oil lubricated cooler running pump, minimizes wear
- Oil sight glass for fast, easy and efficient maintenance
- Roll-bar handle for portability and additional protection
- Built-in thermal overload for additional motor protection
- Includes: 1/4" Brass Makita universal coupler

HEAT GUN

HG1100

- 2-speed - 8 or 14 cfm blower setting
- Thermocouple control maintains precise temperature
- 250° - 1,100°F - variable temperature control for a wide variety of applications
- Ceramic core protects the heating element for longer tool life
- Strips paint and varnish, thaws frozen metal pipes, loosens tile and putty, remelts adhesives and more

VARIABLE SPEED BLOWER

UB1101

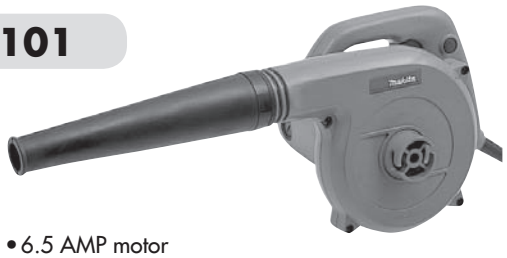

- 0-2,500 RPM; • 6.5 AMP motor
- Silent synchronized pin clutch for reduced wear and quiet operation
- Heat treated, machine cut gears for efficient power transfer
- 6 stage externally adjustable clutch mechanism
- "Sure-Lock" depth adjustment for consistent screw depth setting
- Includes: front cap

CORDLESS TOOL BATTERIES

9.6 VOLT - STICK STYLE

Battery	Part No.	Cell Type	Amp Hour (Ah)
9000	632007-4	Ni-Cd	1.3

14.4 VOLT - POD STYLE

Battery	Part No.	Cell Type	Amp Hour (Ah)
1434	193158-3	Ni-MH	2.6

12 VOLT - POD STYLE

Battery	Part No.	Cell Type	Amp Hour (Ah)
1234	193157-5	Ni-MH	2.6

18 VOLT - POD STYLE

Battery	Part No.	Cell Type	Amp Hour (Ah)
1834	193159-1	Ni-MH	2.6

LXT LITHIUM-ION CORDLESS TOOLS

Makita's LXT Lithium-Ion battery and Rapid Optimum Charger produces 430% total lifetime work with 2.5x more cycles. The LXT Lithium-Ion battery provides longer run time, 5x lower self-discharge (for use any time) and 16 firm holding contact terminals for constant high power. The Rapid Optimum Charger and battery communicates throughout the charging process using the built-in chip in the battery and built-in CPU chip in the charger. The charger has a built-in fan to cool the battery and uses "Active 3 Control" for current, temperature and voltage control which helps produce more lifetime work. The charger earned the ENERGY STAR® label for meeting the strict energy-efficient guidelines set by the US Environmental Protection Agency (EPA) and US Department of Energy (DOE). There is a 3-year warranty on the tool and 1-year warranty on battery and charger.

ALL LXT LITHIUM-ION CORDLESS TOOLS ARE BACKED BY MAKITA'S EXCLUSIVE 3 YEAR WARRANTY

36V LXT LITHIUM-ION CORDLESS 1" SDS-PLUS ROTARY HAMMER KIT

- Makita-built variable speed motor delivers 0-1,200 RPM and 0-4,800 BPM for 2X faster drilling
- Ergonomically designed vibration absorbing handle and a large 2-finger trigger for reduced operator fatigue
- 3-Mode operation for rotation only, hammering with rotation, or hammering only
- One-Touch sliding chuck for easy bit changes
- Chisel rotates 360° with 40 different positions
- Built-in torque limiter ensures stable torque control
- Compact design at only 14-1/4" long and weighs only 9.9 lbs.
- Built-in L.E.D. light illuminates the work area
- Includes: (2) 36V LXT Lithium-Ion 2.6Ah batteries, rapid optimum battery charger, tool case, side handle and depth gauge

BHR261

18V LXT LITHIUM-ION CORDLESS 7/8" SDS-PLUS ROTARY HAMMER KIT

- Makita-built motor delivers 0-1,100 RPM and 0-4,000 BPM for 2X faster drilling
- 3-Mode operation for rotation only, hammering with rotation, or hammering only
- Chisel rotates 360° with 40 different positions
- Built-in torque limiter clutch disengages if bit jams when hitting rebar
- Compact, pistol grip design at only 14-1/8" long and weighs only 7.0 lbs
- Ergonomically designed with large 2-finger trigger
- Built-in L.E.D. light illuminates the work area
- Includes: (2) 18V LXT Lithium-Ion 3.0Ah batteries, rapid optimum battery charger, contractor bag, side handle and depth gauge

BHR202

Headquarters
BRONX, NEW YORK
Ph: 718-299-6060 • Fx: 718-299-1593
Toll Free: 800-255-0910

Makita INDUSTRIAL POWER TOOLS

18V LXT LITHIUM-ION CORDLESS TOOLS

1/2" DRIVER-DRILL KIT

- Makita built, 4-pole maximum torque motor delivers 560 in. lbs. of efficient torque
- Compact design at only 9-3/8" length and weighs only 4.6 lbs.
- Two built-in L.E.D. lights for more illuminated work
- 3-Speed design produces 25% faster working speed
- Externally accessible brushes for serviceability
- Includes: 2 LXT Lithium-Ion 3.0Ah batteries, 45-minute optimum charger, screwdriver bits and carrying case

BDF451

1/2" HAMMER DRIVER-DRILL

- Makita built 4-pole motor delivers 560 in.lbs. of Max Torque and 360 in. lbs. of PTI Torque
- Compact design at only 9-9/16" long and weighs only 4.9 lbs.
- 2-speed all metal transmission (0-400 / 0-1,700 RPM) covers a wide range of applications

BHP454

- Shift-Lock™ drive system quickly shifts between modes
- Two Trigger-forward built-in L.E.D. lights illuminates the work area
- Ergonomic shape fits like a glove with even pressure and easy control grip
- Includes: (2) 18V LXT Lithium-Ion 3.0Ah batteries, rapid optimum battery charger, tool case, tool belt clip, side handle, depth gauge, bit holder, screwdriver bits and plastic battery cover

1-1/2" HAMMER DRIVER -DRILL KIT

- Makita built 4-pole maximum torque motor delivers 450 in.lbs. of efficient torque
- More compact design at only 8-3/4" long and weighs only 4.2 lbs.
- 2-speed all metal transmission (0-400 / 0-1,500 RPM) covers a wide range of applications
- Trigger-forward built-in L.E.D. light illuminates the work area

BHP452

- Ergonomic shape fits like a glove with even pressure and easy control grip
- Includes: (2) 18V LXT Lithium-Ion 3.0Ah batteries, rapid optimum battery charger, tool case, tool belt clip and plastic battery cover

HYBRID™ 4-FUNCTION TOOL KIT (IMPACT / HAMMER / DRIVER / DRILL)

- Hybrid™ Tool that drives lag bolts, drills into concrete, drives screws with clutch settings and drills into wood, metal and plastic
- Makita built, 4-pole motor delivers 1,240 in. lbs. of torque in a compact size
- Compact design at only 7-3/8" length and weighs only 3.9 lbs.

BTP140

- Ergonomic shape fits like a glove with even pressure and easy control
- 45-minute Optimum Charger (25 minutes for 3.0 Ah batteries) has a built-in fan to cool the battery
- Built-in LED lights illuminates the work area
- Includes: (2) 18V LXT Lithium-Ion 3.0Ah batteries, 45-minute optimum charger and tool case

18V LXT LITHIUM-ION CORDLESS TOOLS

3-SPEED BRUSHLESS MOTOR IMPACT DRIVER

BTD144

- Makita-built Brushless Motor delivers 1,420 in.lbs. of max torque
- Brushless Motor Technology provides up to 20% longer battery life per charge
- Variable 3-speed selection switch (0-1,300/0-2,000/0-2,600 RPM and 0-1,300/ 0-2,800/ 0-3,400 IPM)
- Electric brake for increased productivity
- Compact design at only 5-1/2" long and weighs just 3.3 lbs.
- Convenient one-touch 1/4" hex chuck for simple bit insertion
- Built-in L.E.D. light with on/off switch illuminates the work area
- Proprietary hammer and anvil impact mechanism delivers maximum driving power
- Includes: (2) 18V LXT Lithium-Ion batteries, 30-minute rapid optimum charger, tool belt clip and plastic tool case

1/2" IMPACT WRENCH KIT

BTW251

- Makita built, 4-pole motor delivers 170 ft. lbs. of torque in a compact size
- More compact design at only 6.5" long and weighs only 3.7 lbs.
- Batteries charge 2X faster in only 25 minutes
- Ergonomic shape fits like a glove with even pressure and easy control
- Built-in L.E.D. light illuminates the work area
- Replaceable armature, field, and externally accessible brushes
- Includes: (2) 18V Compact Lithium-Ion batteries, rapid charger and contractor bag

1/2" IMPACT WRENCH

BTW450

- Makita built motor delivers 325 ft. lbs. of torque; 1,600 RPM and 2,200 IPM
- More compact design at only 10 1/2" long and weighs only 7.5 lbs.
- Large rocker switch and soft grip handle for easier usage and comfort
- Single L.E.D. light for increased job site visibility
- Shock absorbent handle protects the battery housing
- Large tool hook ensures a secure clip when tool is not in use
- Includes: (2) 18V Lithium-Ion 3.0Ah batteries, rapid optimum battery charger, plastic battery cover, tool hook and contractor bag

3/8" ANGLE IMPACT WRENCH

BTL063

- Compact right angle impact driver for working in tight spaces
- Makita built motor produces 530 in. lbs. of maximum torque and 0-3,000 IPM
- Variable speed (0-2,000 RPM) for a range of applications
- Impact housing can be rotated into one of 8 radial positions for difficult hand/angle positions
- Over one foot of tool extension for extra reach into deep tight spaces
- L.E.D. light illuminates the work area
- Convenient belt clip mounts on either side of the tool
- Phosphorescent bumper ring for locating tool in dark work areas
- Includes: (2) 18V LXT Lithium-Ion 3.0Ah batteries, 30-minute rapid optimum charger, plastic battery cover, tool belt clip and contractor bag

ANGLE IMPACT DRIVER

BTL061

- Compact right angle impact driver for working in tight spaces
- Makita built motor produces 531 in. lbs. of maximum torque and 0-3,000 IPM
- Variable speed (0-2,000 RPM) for a range of applications
- Over one foot of tool extension for extra reach into deep tight spaces
- L.E.D. light illuminates the work area
- Convenient belt clip mounts on either side of the tool
- Phosphorescent bumper ring for locating tool in dark work areas
- Includes: (2) 18V LXT Lithium-Ion 3.0Ah batteries, 30-minute rapid optimum charger, plastic battery cover, tool belt clip and contractor bag

Headquarters
BRONX, NEW YORK
Ph: 718-299-6060 • Fx: 718-299-1593
Toll Free: 800-255-0910

makita INDUSTRIAL POWER TOOLS

18V LXT LITHIUM-ION CORDLESS TOOLS

AUTOFEED SCREWDRIVER

- Makita® built 4-pole motor handles decking and sub-floor applications at 4,000 RPM
- High capacity range: 1-3/4" to 2-15/16" collated screws
- Integrated autofeed design makes the tool lighter and more powerful
- Aluminum dust-proof autofeed housing for smooth sliding action
- Screw guide prevents screw strip tangling and folds against housing for storing
- Silent clutch design uses durable materials increasing efficiency and decreasing noise
- Includes: (2) 18V LXT Lithium-Ion 3.0Ah batteries, rapid optimum battery charger, contractor bag, belt hook, plastic battery cover and (2) 7-1/8" Philips #2 power bits

BFR750

DRYWALL SCREWDRIVER

- Makita® built 4-pole motor handles drywall and framing applications at 4,000 RPM
- Silent clutch design uses durable materials increasing efficiency and decreasing noise
- Aluminum dust-proof depth adjustment cone removes easily for bit changes
- Extra fine depth adjustment ring with 60 detent positions
- Tool belt clip can be moved to either side of the tool
- L.E.D. light illuminates the work area
- Includes: (2) 18V LXT Lithium-Ion 3.0Ah batteries, rapid optimum battery charger, contractor bag, belt hook, plastic battery cover and (2) 1" insert bits

BFS450

3/8" ANGLE DRILL

- Makita-built 4-pole motor delivers 121 in. lbs. of torque
- Variable speed (0-1,800 RPM) for a wide range applications
- Compact at only 12-3/8" long and 3.5 lbs. for reduced operator fatigue
- Built-in L.E.D. light illuminates the work area
- Ergonomic shape fits like a glove with easy control
- Includes: (2) 18V LXT Lithium-Ion 3.0Ah battery, rapid optimum battery charger, contractor bag, plastic battery cover, chuck key holder and chuck key

BDA350

CUT-OFF/ANGLE GRINDER KIT

- Produces 50% faster grinding with an impressive 10,000 RPM
- Compact design at only 12-1/2" long and weighs only 5.6 lbs.
- Built-in electronic control circuit with L.E.D. warning lights for overload protection
- Slide switch with lock-on
- Includes: (2) LXT Lithium-Ion 3.0Ah batteries, 45-minute optimum charger, cut-off wheel guard, grinding wheel guard, grinding wheel, cut-off wheel and tool case

BGA452

5" CONCRETE PLANER

- Ideal for smoothing finishes on concrete as well as leveling concrete seams
- Powerful 10 AMP motor; 10,000 RPM
- Constant Speed Control maintains RPMs throughout the application
- Electronic Current Limiter protects the motor from overloading
- Ergonomic soft grip with large easy-to-operate trigger switch
- L.E.D. power light serves as a pilot light and indicates anti-restart function
- Includes: loop handle, 5" offset diamond wheel, lock nut wrench, hex wrench, dust bag assembly, brush set and metal carrying case

PC5000C

18V LXT LITHIUM-ION CORDLESS TOOLS

6 1/2" PLUNGE CIRCULAR SAW

"PRECISION ACCURATE CUTTING DELIVERS A SPLINTER-FREE MIRROR FINISH"

- Powerful 12 AMP motor with 2,000 - 5,200 RPM Variable Speed Dial Control
- Electronic Speed Control maintains constant speed under load for smooth cutting
- Electronic Soft Start feature for smooth start-ups
- Large Cutting Capacity (2-3/16" at 90° and 1-9/16" at 45°)
- Bevel capability (-1° to 48°) with positive stops at 22.5° and 45°
- Close to the wall cutting (11/16") for expanded cutting applications
- Smooth and convenient plunge release lever for operator comfort
- Rear dust port directs material away and easily connects to a vacuum system
- Includes: 48T carbide-tipped blade, hex blade wrench and plastic tool case

SP6000K

5-3/8" CIRCULAR TRIM SAW KIT

BSS501

- Compact and lightweight design that delivers 3,600 RPM
- 2" maximum cutting capacity enables cutting a 2 x 4 in one pass
- Built-in L.E.D. lights for more illuminated work
- Built-in dust blower enhances line of sight and keeps work piece clean
- Blade wrench stows in the saw for fast and convenient blade changing
- Includes: 5-3/8" x 16T general purpose carbide-tipped blade, hex blade wrench #5, rip fence, (2) 18V LXT Lithium-Ion 3.0Ah batteries, 25-minute rapid optimum charger and plastic tool case

6$^{1}/_{2}$"CIRCULAR SAW KIT

BSS610

- Makita built, D35 high torque motor delivers 3,700 RPM
- Cuts 2x material at 45˚ with 50˚ maximum capacity
- Compact at only 13-5/8" length and weighs only 7.1 lbs.
- Two built-in L.E.D. lights for more illuminated work
- Built-in dust blower enhances line of sight and keeps work piece clean
- Externally accessible brushes for serviceability
- Includes: 2 LXT Lithium-Ion 3.0Ah batteries, 45-minute optimum charger, blade and tool case

JIG SAW KIT

BJV180

- Low vibration and noise level for more control and comfort
- 4-Pole Position cut settings (3 Orbital and 1 Straight) for fast, efficient cutting
- Large variable speed trigger allows for total cutting control (0-2,600 SPM)
- Built-in L.E.D. lights for more illuminated work
- "Tool-less" push-in lock system for fast blade changes
- Accepts "T" (Tang) shank blades
- Includes: (1) blade set (B-10, B-13, B-22), cover plate, (2) 18V LXT Lithium-Ion 3.0Ah batteries, 25-minute rapid optimum charger, anti-splintering device and contractor bag

RECIPRO SAW

BJR181

- Makita built, D35 high torque motor delivers 50% faster cutting
- 2,900 SPM; 1-1/8" length of stroke
- Compact design at only 19-5/8" length and weighs only 8.1 lbs.
- Two built-in L.E.D. lights for more illuminated work
- One-handed tool-less blade changes and shoe adjustments
- Retractable sky hook for hanging on rafters
- Externally accessible brushes for serviceability
- Includes: (2) LXT Lithium-Ion 3.0Ah batteries, 45-minute optimum charger and blade

Headquarters
BRONX, NEW YORK
Ph: 718-299-6060 • Fx: 718-299-1593
Toll Free: 800-255-0910

makita INDUSTRIAL POWER TOOLS

18V LXT LITHIUM-ION CORDLESS TOOLS

PORTABLE BAND SAW KIT

BPB180

- Makita built motor delivers 50% faster cutting with 6-setting variable speed dial at 275-530 ft./min.
- Adjustable foot protects material & provides positive support
- Compact design at only 20-5/8" long and weighs only 14.1 lbs.
- Two built-in L.E.D. lights with afterglow illuminate the line of cut
- Built-in skyhook and protective rubber bumpers
- Includes: (2) LXT Lithium-Ion 3.0Ah batteries, 45-minute optimum charger, blade and tool case

18 GAUGE STRAIGHT SHEAR KIT

BJS130

- Makita-built 4-pole motor delivers 2,800 SPM - almost 20% faster than most cordless shears
- Tough double-cut shear design handles up to 18 ga. mild steel and 20 ga. stainless steel
- Swivel shear head rotates 360 degrees for increased cutting options
- Compact design at only 13-3/4" long and weighs only 5.0 lbs.
- Ergonomic shape with soft grip handle provides comfort and easy control
- Reversible belt-clip attaches to either side of the tool for secure attachment
- Includes: (2) 18V LXT Lithium-Ion 3.0Ah batteries, rapid optimum battery charger, contractor bag, plastic battery cover, belt hook and adjustment wrench

3/8" CROWN STAPLER KIT

BST221

- Drives 1/4", 3/8", 1/2", 9/16", 5/8", 3/4" and 7/8" length staples
- Spring-loaded driving mechanism in a more compact tool with less weight
- Contact actuation is well-suited for production environment
- Convenient window on magazine shows the number of remaining staples
- Easy to use depth control setting by turning adjustment knob
- Also utilizes Arrow® T50 type staples
- Includes: (2) 18V LXT Lithium-Ion 3.0Ah battery, rapid optimum battery charger, tool belt clip, safety glasses and contractor bag

BLOWER

BUB182Z

- Makita-built motor produces 179 MPH max air velocity and 91 cfm max air volume
- Up to 12 minutes of continuous operation from a single charge at high speed
- Variable speed (0-18,000 RPM) for optimal speed control
- Compact design at only 20-3/4" long and weighs only 3.9 lbs.
- Ergonomic shape fits like a glove with even pressure and easy control
- Soft grip handle provides increased comfort on the job
- 18V LXT Lithium-Ion battery and charger sold separately
- Includes: nozzle

LITHIUM-ION ULTRA COMPACT CORDLESS TOOLS

Lithium-Ion batteries provides longer run time and lower self-discharge. Battery chargers allows for more work and earned the ENERGY STAR® label for meeting the strict energy-efficient guidelines set by the US Environmental Protection Agency (EPA) and US Department of Energy (DOE). 3-year warranty on tool and 1-year warranty on battery & charger.

7.2V IMPACT SCREW DRIVER KIT

- Yields 177 in.lbs. of torque
- Weighs only 1 lb.
- 3,000 Rotational IPM & 2,300 RPM
- Straight or Pistol Grip Positions
- Built-in LED light
- Includes: (2) 7.2V Lithium-Ion batteries, 30 Minute Charger, (2) Philips & (1) slotted fastening bits, (1) 1/8" drill bit and tool case

TD020DSEW

10.8V L.E.D. FLASHLIGHT

* Runs up to 9 hours per single battery charge
* Compact design at only 4-3/4" length and weighs only 0.55 lbs. with battery
* Soft grip handle and built-in belt clip

ML100W

DF030DW

1/4" HEX / 6-3/16" long / weighs 1.9 lbs.

DF330DW

3/8" Chuck / 7-7/16" long / weighs 2.2 lbs.

Both Models Feature:
- Makita-built motor delivers 200 in.lbs. of torque
- 2-Speed design (0-350 / 0-1,300 RPM)
- Built-in L.E.D. light illuminates the work area
- Ergonomic shape fits like a glove with easy control
- Includes: (2) 10.8V Lithium-Ion 1.3Ah batteries, battery charger, #2 double ended phillips bit, tool holster and tool case

10.8V DRIVER-DRILL KITS

DF030DW **DF330DW**

10.8V IMPACT DRIVER KIT

- Makita-built motor delivers 800 in. lbs. of torque
- Variable speed (0-2,400 RPM) for a wide range of fastening applications
- Ultra compact at only 6-1/8" long and 2.0 lbs.
- Built-in L.E.D. light illuminates the work area
- Ergonomic shape and soft handle grip
- Electric brake for immediate stops
- Includes: (2) 10.8V Lithium-Ion 1.3Ah batteries, 50 minute battery charger, #2 double ended phillips bit, tool holster and tool case

TD090DW

10.8V 2-PIECE COMBO KIT

- Kit Includes: (1) DF030DW Driver-Drill, (1) TD090DW Impact Driver, (2) 10.8V Lithium-Ion 1.3Ah batteries, 50 minute battery charger and tool case

LCT203W

10.8V 3-PIECE COMBO KIT

- Kit Includes: (1) DF030DW Driver-Drill, (1) TD090DW Impact Driver, (1) ML100W L.E.D. Flashlight, (2) 10.8V Lithium-Ion 1.3Ah batteries, 50 minute battery charger and tool case

LCT302W

Headquarters
BRONX, NEW YORK
Ph: 718-299-6060 • Fx: 718-299-1593
Toll Free: 800-255-0910

makita INDUSTRIAL POWER TOOLS

18V LXT LITHIUM-ION CORDLESS COMBO KITS

LXT211

2 TOOL COMBO KIT

Kit Includes:
1/2" Hammer Driver-Drill (BHP452), Impact Driver (BTD141), 2 ea. LXT Lithium-Ion 3.0Ah batteries, Rapid Optimum Battery Charger and Tool Case

LXT218

2 TOOL COMBO KIT

Kit Includes:
1/2" Hammer Driver-Drill (BHP454), Impact Driver (BTD141), 2 ea. LXT Lithium-Ion 3.0Ah batteries, rapid optimum battery charger and tool case

LXT405

4 TOOL COMBO KIT

Kit Includes:
1/2" Hammer Driver-Drill (BHP452), Impact Driver (BTD141), 6-1/2" Circular Saw (BSS611), Flashlight (BML185), 2 ea. LXT Lithium-Ion 3.0Ah batteries, 30-minute rapid charger and contractor bag

LXT406

4 TOOL COMBO KIT

Kit Includes:
1/2" Hammer Driver-Drill (BHP452), Recipro Saw (BJR182), 6-1/2" Circular Saw (BSS611), Flashlight (BML185), 2 ea. LXT Lithium-Ion 3.0Ah batteries, 30-minute rapid charger and contractor bag

See Individual Combo Kit Tools on Page 154

makita INDUSTRIAL POWER TOOLS

18V LXT LITHIUM-ION CORDLESS COMBO KITS

LXT407

4 TOOL COMBO KIT

Kit Includes:
1/2" Hammer Driver-Drill (BHP452), Impact Driver (BTD141), Recipro Saw (BJR182), Flashlight (BML185), 2 ea. LXT Lithium-Ion 3.0Ah batteries, 30-minute rapid charger and contractor bag

LXT601

6 TOOL COMBO KIT

Kit Includes:
1/2" Hammer Driver-Drill (BHP452), 6-1/2" Circular Saw (BSS611), Recipro Saw (BJR182), Impact Driver (BTD141), 4-1/2" Cut-Off/ Angle Grinder (BGA452), Flashlight (BML185), 2 ea. LXT Lithium-Ion 3.0Ah batteries, 30-minute rapid charger and contractor bag with wheels and telescoping handle

LXT702

7 TOOL COMBO KIT

Kit Includes: 1/2" Hammer Driver-Drill (BHP452), 6-1/2" Circular Saw (BSS611), Recipro Saw (BJR182), Impact Driver (BTD141), 4-1/2" Cut-Off/Angle Grinder (BGA452), Flashlight (BML185), FM/AM Job Site Radio (BMR100W), 2 ea. LXT Lithium-Ion 3.0Ah batteries, rapid optimum battery charger and contractor bag with wheels and telescoping handle

LXT902

9 TOOL COMBO KIT

Kit Includes: 1/2" Hammer Driver-Drill (BHP452), 6-1/2" Circular Saw (BSS611), Recipro Saw (BJR182), Impact Driver (BTD141), 1/2" Impact Wrench (BTW251), 7/8" SDS-PLUS Rotary Hammer (BHR240), 4-1/2" Cut-Off/Angle Grinder (BGA452), Flashlight (BML185), FM/AM Job Site Radio (BMR100W), 2 ea. LXT Lithium-Ion 3.0Ah batteries, rapid optimum battery charger and contractor bag with wheels and telescoping handle

See Individual Combo Kit Tools on Page 154

Headquarters
BRONX, NEW YORK
Ph: 718-299-6060 • Fx: 718-299-1593
Toll Free: 800-255-0910

Makita INDUSTRIAL POWER TOOLS

COMBO KIT TOOLS

BHP452
1/2" HAMMER DRIVER-DRILL

2-Speed (0-400 / 0-1,500 RPM) with Makita-built 4-pole motor delivers 450 in. lbs. of torque and weighs only 4.2 lbs.

BSS611
6-1/2" CIRCULAR SAW

A D35 high torque motor that delivers maximum power for cutting 2x material at 45° and is only 6.9 lbs.

BHP454
1/2" HAMMER DRIVER-DRILL

2-Speed (0-400 / 0-1,700 RPM) with Makita-built 4-pole motor delivers 560 in. lbs. of torque and weighs only 4.9 lbs.

BJR182
RECIPRO SAW

Powerful 2,900 SPM with tool-less blade changes & shoe adjustments at only 8.1 lbs.

BHR240
7/8" SDS-PLUS ROTARY HAMMER

Packs power and speed in all three modes: rotation only, hammering with rotation or hammering only

BGA452
4-1/2" CUT-OFF/ANGLE GRINDER

Produces an impressive 10,000 RPM for 50% faster grinding

BTD141
IMPACT DRIVER

Variable speed (0-2,300 RPM) provides 1,330 in. lbs. of torque in a compact design and weighs only 3.4 lbs.

BML185
FLASHLIGHT

4-Position with Xenon bulbs runs 4.3 hrs.

BTW251
1/2" IMPACT WRENCH

Delivers 170 ft. lbs. of torque with 0-3,000 IPM in a compact design weighing only 3.7 lbs.

BMR100W
FM/AM JOB SITE RADIO

Rugged design with 10 Pre-Set buttons and mp3 compatible

Makita INDUSTRIAL POWER TOOLS BLADES

CARBIDE TIPPED CIRCULAR SAW BLADES

DIA.	TEETH	ARBOR	GRIND	HOOK	PLATE	KERF	RPM	TYPE	CAT. NO.	FOR MODELS:
4-3/8″	12	20mm	ATB	22°	.049″	.073″	13900	General Purpose	A-90093	4200NH
4-3/8″	24	20mm	ATB	10°	.062″	.078″	13900	General Purpose	721107-6A	4200NH
5-1/2″	16	5/8″	ATB	20°	.062″	.078″	10900	General Purpose	762335-0	5005BA
7-1/4″	16	5/8″	ATB	25°	.049″	.073″	8300	MakBlade	A-90009-B	5007FAK, 5007FK, 5007MG, 5007MGA, 5007NHK, 5277NB, 5377MG, 5740NB
7-1/4″	24	5/8″	ATB	15°	.047″	.071″	8300	Gen. Contractor	D-24826-10	5007FAK, 5007FK, 5007MG, 5007MGA, 5007NHK, 5277NB, 5377MG, 5740NB
7-1/4″	24	5/8″	M′	15°	.047″	.071″	8300	Framing*	A-94530-10	5007FAK, 5007FK, 5007MG, 5007MGA, 5007NHK, 5277NB, 5377MG, 5740NB
7-1/4″	24	5/8″	M′	15°	.047″	.071″	8300	Framing	A-94839A	5007FAK, 5007FK, 5007MG, 5007MGA, 5007NHK, 5277NB, 5377MG, 5740NB
7-1/4″	24	5/8″	M′	15°	.047″	.071″	8300	Framing	A-94839-10	5007FAK, 5007FK, 5007MG, 5007MGA, 5007NHK, 5277NB, 5377MG, 5740NB
8-1/4″	24	5/8″	ATB	20°	.078″	.051″	5700	Framing	D-21521	5008FA
7-1/4″	18	5/8″	ATB	25°	.049″	.073″	8300	BlueMaks	721261-A	5007FAK, 5007FK, 5007MG, 5007MGA, 5007NHK, 5277NB, 5377MG, 5740NB
7-1/4″	40	5/8″	ATB	20°	.049″	.073″	8500	Fine Crosscutting	721251-A	5007FAK, 5007FK, 5007MG, 5007MGA, 5007NHK, 5277NB, 5377MG, 5740NB
8-1/4″	40	5/8″	ATB	20°	.055″	.079″	5700	Fine Crosscutting	792377-A	5008FA
16-5/16″	32	25mm	ATB	20°	.078″	.109″	3500	Beam & Timber	A-90956	5402NA
16-5/16″	60	25mm	ATB	20°	.078″	.109″	3500	Beam & Timber	792118-8	5402NA

*ULTRA COATED FRAMING BLADE

STEEL CIRCULAR SAW BLADES

DIA.	TEETH	ARBOR	GRIND	HOOK	THICKNESS	KERF	RPM	CAT. NO.	FOR MODELS:
8-1/4″	30	5/8″	CHISEL	20°	.046″	.078″	6360	792281-7	2702
10″	36	5/8″	CHISEL	20°	.062″	.093″	5240	792317-2	2704, 2703, MAKITA 10″ SAWS
10″	50	5/8″	-	0°	.062″	.078″	5240	792641-3	LS1030N, LS1040, LS1040F, LS1013F, LS1013FL
14″	70	25MM	-	0°	.062″	.078″	4300	792671-4	LS1440
10″	100	25MM	HG	0°	.078″	.078″	5240	721404-0	LS1030N, LS1040, LS1040F, LS1013F, LS1013FL
10″	100	25MM	HG	0°	.078″	.078″	5240	721405-8	LS1030N, LS1040, LS1040F, LS1013F, LS1013FL

Headquarters
BRONX, NEW YORK
Ph: 718-299-6060 • Fx: 718-299-1593
Toll Free: 800-255-0910

makita INDUSTRIAL POWER TOOLS

BLADES, BATTERIES & CHARGERS

FERROUS METAL ABRASIVE CUT-OFF WHEELS

DIA.	THICKNESS	ARBOR	GRIT	APPLICATION	CAT. NUMBERS 5 PACK	CAT. NUMBERS 25 PACK	FOR MODELS:
12″	7/64″	1″	A36P	FERROUS METAL INDUSTRIAL	724504-5	-	2412N
14″	1/8″	1″	A36P	FERROUS METAL INDUSTRIAL	724603-3	724603-3-25	2414B, 2414NB, 2414DB
14″	1/8″	1″	A36P	FERROUS METAL STANDARD	A-93859-5	A-93859-25	2414B, 2414NB, 2414DB
14″	1/8″	1″	A36TFB	FERROUS METAL DRYWALL STUDS	A-91017-5	A-91017-5-25	2414B, 2414NB, 2414DB
16″	1/8″	1″	-	FERROUS METAL INDUSTRIAL	724701-3	-	24165

LXT LITHIUM-ION BATTERIES

- Built-in Memory Chip: Memorizes the usage history & communicates with the charger.
- Less Weight: Li-Ion battery weighs 40% less than Ni-MH or Ni-Cd
- Anytime Charge: Lithium-Ion batteries have no memory effect and can be charged at any time.
- Charging Technology: Controls current, voltage & temperture to maximize battery life.

LXT LITHIUM-ION OPTIMUM CHARGING SYSTEM

- Charging Technology: Controls current, voltage & temperature to maximize battery life.
- Central Processing Unit (CPU): Analyzes data from the battery's memory chip.
- Forced Air Cooling Fan: Cools the battery by forcing cool air through the battery's built-in air vents.
- Fast Charging: Quickly charges an 18V 3.0 Amp hour Li-Ion battery in only 30 minutes.

LXT LITHIUM-ION BATTERIES AND CHARGERS

VOLTS	CELL TYPE	AMP HOUR	CAT. NUMBERS 1 PACK	CAT. NUMBERS 2 PACK	CAT. NUMBERS 10 PACK	CHARGERS
18	LI-ION	3	BL1830	BL1830-2	BL1830-10	DC18SC
18	LI-ION	3	194205-3	194230-4	194288-3	DC18SC
18	LI-ION	1.5	BL1815	BL1815-2	-	DC18RA
18	LI-ION	1.5	194309-1	-	-	DC18RA
14.4	LI-ION	3	194066-1	-	-	DC18SC

BOSCH JIG SAWS & RECIPROCATING SAWS

1-1/8" RECIPROCATING SAW

RS7

- 11 Amps Power – most powerful in its class
- Variable speed 0-2,700 improves cutting control
- Dual LED Lights – Bright and long lasting
- Saw Hook for convenient storage between cuts
- Tool-less quick change Blade Changing System
- Ergonomic Handle with Soft Grip for maximum comfort and gripping
- Includes: All Purpose Saw Blade and Jobsite Bag

1-1/4" RECIPROCATING SAW

RS15

- Variable speed 0-2,800 SPM; 12 Amps.
- Bosch Lockjaw™ blade system allows for one handed blade insertion and ejection
- Brute™ drive system provides proven durability, endurance and power
- Comfortable ergonomic grip and soft grip boot provides sure under-hand and over-hand cutting
- Blade Holder Allows up or down cutting
- Swivel cord Allows mobility and provides strain relief
- Includes: All Purpose Blade SAPP6, Wood with Nails Blade and Carrying Case

FOAM RUBBER CUTTER

1575A

- 3.2 amp motor; 3,200 SPM
- Quick blade changes – Easy, no tools required
- Long paddle-type switch and slim motor housing – Makes the tool easy to grip and control
- Power for fast production cutting of all densities of foam rubber and flexible plastic foams
- Includes Tool Body/Motor Unit Only

BARREL GRIP JIG SAW

1584AVSK

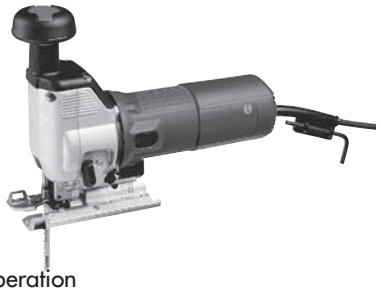

- Powerful 5 amp motor; No load SPM: 500-3,100
- Tool-free blade change system – Fast and easy blade changes
- Exclusive multi-directional blade clamp mechanism for superior blade hold
- Low-vibration design – Ensures extremely smooth operation
- 4-stage orbital action – Adjusts blade motion to match workpiece and cutting task
- Low position roller guide – Ensures blade stability and precise cutting
- Includes: Three Assorted Blades, Steel Footplate Insert Kit, Footplate Adjustment Hex Key and Anti-Splintering Insert

TOP HANDLE JIG SAWS

- Powerful 5 Amp motor, 500-3100 SPM
- Exclusive multi-directional blade clamp mechanism
- Low-vibration design ensures extremely smooth operation
- 4-stage orbital action adjusts blade motion to match workpiece and cutting task
- Low position roller guide ensures blade stability and precise cutting
- Variable speed control dial sets maximum speed and trigger Controls operating speed
- Double insulated and 3-position dust blower
- 1581AVSK Includes: Three Assorted Blades, Footplate Adjustment Hex Key, Anti-splintering Insert, Blade Locking Screwdriver and Carrying Case
- 1587AVSP-1 Includes: Twelve Assorted Blades and Blade case, Footplate Adjustment Hex Key, Steel Footplate Insert Kit, Anti-splintering Insert, No-mar Plastic Footplate Insert Kit and Carrying Case

1581AVSK

Adjustable steel footplate.

1587AVSP-1

Adjustable die-cast aluminum footplate and tool-free blade change system.

Headquarters
BRONX, NEW YORK
Ph: 718-299-6060 • Fx: 718-299-1593
Toll Free: 800-255-0910

BOSCH ROTARY HAMMERS

7/8" SDS-plus® ROTARY HAMMER

11224VSR

- 6.9 Amps; 0-1,100 RPM; 0-6,150 BPM
- Multi-function selector - 3 modes of operation, rotation only, rotary hammer and hammer only mode
- Variable-speed reversing switch
- D-Handle grip provides extra control for overhead and vertical drilling
- Vario-Lock™ positioning rotates and locks chisel into 36 different positions
- SDS-plus® bit system for tool-less bit changes, plus secure bit holding
- Includes: Carrying Case, 360° Auxiliary Handle & Depth Gauge

1" SDS-plus® ROTARY HAMMER

11239VS

- 7.2 amp motor; 0-1,050 RPM; 0-4,000 BPM
- 2 modes of operation, rotation only and rotary hammer mode
- 360° side-handle with quick-adjust depth gauge
- Variable-speed switch for accurate bit starting
- Integral clutch helps minimize torque reaction
- Padded rear handle absorbs shock for operator comfort
- SDS-plus® bit system - tool-less bit changes, plus secure bit holding
- Includes: Carrying Case, 360° Auxiliary Handle & Depth Gauge

1" SDS-PLUS® BULLDOG EXTREME ROTARY HAMMERS

- 7.2 Amp; 0-1,300 RPM; 0-5,800 BPM
- Multi-function Selector 3 modes of operation, rotation only, rotary hammer and hammer-only mode
- Vario-Lock™ Positioning Rotates and locks chisel into 36 different positions to optimize working angle
- Patented Rotating Brush Plate Provides equal power in forward and reverse
- Patented Cord Turret 35˚ pivot for added flexibility and longer cord life
- SDS-plus® Bit System Tool-free bit changes with automatic bit locking, dust protection and maximum impact energy transfer rate
- Variable-speed Reversing Trigger For accurate bit starting as well as removing fasteners or bound bits
- Pistol-Grip design
- Integral Clutch Helps minimize torque reaction
- Includes: Auxiliary Handle, Depth Gauge and Carrying Case

11253VSR

Pistol-Grip Design

11255VSR

D-Handle Design

BOSCH CUT-OFF MACHINES – TUCKPOINT GRIDER – PLANER

CUT-OFF MACHINES

1364K

12" - 15.0 AMPS - 5,000 RPM

1365K

14" - 15.0 AMPS - 4,300 RPM

- AC/DC capability - Extends the versatility of the tool by working from DC outlets
- Reinforced armature windings - Protects motor against abrasive dust and metal debris
- Service-Minder™ Brushes - Stops tool when preventive maintenance is required
- Large footplate - Improves stability and allows greater depth of cut
- Reversible fire position - Set up in fire forward, but easily changed to fire reverse
- Both Models include Wrap Around Side Handle, Wheel Guard, Adjustable Footplate, Inside Flange, 7/8" Arbor Locking Nut, 1" Arbor Locking Nut, Outside Flange and 3/8" Allen Wrench and 6 mm Allen Wrench

5" TUCKPOINT GRINDER

1775E

- Powerful 8.5 Amp 11,000 RPM motor
- Depth of Cut - 0 to .75" for 4" wheel and 0 to 1.25" for 5" wheel
- Specially designed guard system for tuckpointing applications with dust extraction
- Large viewing window and variable depth adjustment
- Tool-free blade access allows quick access for wheel changes
- Lock-on/off swtich for extended use applications
- Constant response™ circuitry maintains constant speed under load
- Includes: Tuckpointing Guard, Inner Flange, Outer Flange, Auxiliary Handle, Spanner Wrench, Hex Key Wrench, 5" Tuckpointing Wheel and Vacuum Adapter

3¼" PLANER

3365

- 5.0 amp motor; 18,000 RPM
- Lock-off release button
- Chip ejection switch – Directs shavings left or right
- Guide fence – Ensures consistent planning through entire workpiece
- Electronically counterbalanced single-blade drum for smooth operation
- Includes: Two Woodrazor™ Blades, Guide Fence, Vacuum Adapter for 35mm, 1-1/4" and 1-1/2" Hoses, and Blade Wrench

PROVIDES BOTH LEFT OR RIGHT CHIP EJECTION

POWER BOX™ JOBSITE AM/FM STEREO WITH CD AND REMOTE

PB10-CD

- Radio/CD run off AC power and Bosch battery packs - 12V to 24V
- Integrated jobsite CD player with CD-R/RW and MP3 compatibility
- 4-way GFCI protected outlet Power-up jobsite tools and equipmen
- Best Reception - Upgraded Antenna and Advanced Digital Tuner
- Premium Speakers, More Power, and separate Bass and Treble control
- Exclusive Remote Control Stores on Power Box or on Key Ring
- FM Stereo AM tuner with 20 FM and 10 AM station presets
- Charges 12V - 24V Bosch batteries
- Four preset equalizer settings and enhanced "Bosch Sound"
- Protective aluminum roll cage protects unit from a 10 foot jobsite drop
- Sealed Buttons, Speakers, Battery Chamber Protects Unit From Dust and Weather

Headquarters
BRONX, NEW YORK
Ph: 718-299-6060 • Fx: 718-299-1593
Toll Free: 800-255-0910

BOSCH SANDERS / GRINDERS & ACCESSORIES

4½" SMALL ANGLE GRINDER

1347A

- 6.0 amp motor; 11,000 RPM
- Spindle lock – Allows quick and easy wheel changes
- 2-position auxiliary handle – Specially designed and angled to a "natural" position for maximum comfort and control
- Metal gear housing – Withstands job-site abuse
- 5/8"-11 spindle thread – Most popular size for a wide range of accessories
- ncludes: Guard, Auxiliary Handle, Flange Kit (flange kit contains inner and outer wheel flanges), Spanner Wrench & Abrasive Wheel

5" SMALL ANGLE GRINDER

1801

- 9.5 amp motor; 11,000 RPM
- Vibration Control Handle reduces vibration up to 60%
- Lock-on/off switch For extended use applications
- AC/DC capability allows working from DC outlets such as generators
- Sealed switch keeps debris out of the switch mechanism
- 5/8" -11 Spindle provides wide flexibility for mounting most popular accessories
- Tool-free adjustable guard and Spindle Lock for quick wheel changes
- Includes: Guard, Vibration Control Auxiliary Handle, Flange Kit, Spanner Wrench and Abrasive Wheel

5" SMALL ANGLE GRINDER

1803EVS

- 9 amp motor; 2,800-11,000 RPM
- Constant-Response™ Circuitry – Constantly monitors and adjusts power to maintain desired RPM
- Variable speed dial - Provides the ability to adjust speed for specialty applications
- 5/8"-11 thread spindle – Wide flexibility for mounting most popular accessories
- Spindle lock – For easy wheel changes
- Includes: Guard, Vibration Control Auxiliary Handle, Flange Kit (inner and outer wheel flanges), Spanner Wrench and Abrasive Wheel

5" PADDLE SWITCH GRINDER

1811PS

- 9 amp motor; 11,000 RPM
- Vibration Control Handle reduces vibration up to 60%
- Paddle switch with Lock-on for better operator control
- AC/DC capability allows working from DC outlets such as generators
- Sealed switch keeps debris out of the switch mechanism
- ServiceMinder™ brushes stops tool when preventative maintenance is required
- Directed Air Flow diverts dust away from vital components
- Tool-free adjustable guard and Spindle Lock for quick wheel changes
- Includes: Guard, Vibration Control Auxiliary Handle, Flange Kit (inner and outer wheel flanges), Spanner Wrench and Abrasive Wheel

5" CONCRETE SURFACING GRINDER KIT

1773AK

- 10 amp motor • 11,000 RPM
- Epoxy-coated field windings
- Special head for surfacing applications with dust extraction
- Wrap-around side handle
- Service-Minder™ light – Indicates when preventive maintenance is required
- On/off switch with lock-on
- Includes: Auxiliary Handle, Flange Kit, Spanner Wrench, 5" Diamond Cup Wheel, Vacuum Adapter, 3 Extra Brush Rings & Carrying Case

LARGE ANGLE GRINDERS

1873-6

7" WHEEL DIAMETER

1893-6

9" WHEEL DIAMETER

- 15 amp motor; 6,000 RPM
- Lock-on/off switch for extended use applications
- Vibration Control Side and Main Handles Reduces vibration up to 60%
- AC/DC capability extends the versatility of the tool by working from DC outlets
- 5/8"-11 Spindle offers wide flexibility for mounting most popular accessories
- Reinforced armature windings protects the motor against abrasive dust and metal debris
- 3-Position auxiliary handle designed for multiple hand positions
- Model 1873-6 Includes: Wheel Guard, Backing Flange and Lock Nut Kit, Hex Key Wrench and Vibration Control Auxiliary Handle
- Model 1893-6 Includes: Wheel Guard and Vibration Control Auxiliary Handle

SANDER/GRINDER ACCESSORIES

GUARDS FOR GRINDING WHEELS

For 7" Wheel	1 605 510 204
For 9" Wheel	1 605 510 205

BACKING FLANGE

5/8" - 11	T3033
M-14	1 600 345 025

LOCKNUT

5/8" - 11	T3034
M-14	1 600 345 025

ADAPTER KIT

Kit comes complete with Nut T3034, Flange T3033 and Wrench 1 607 950 038. Part Number 2 610 906 326

BOSCH SPIRAL CUTTING – ROUTERS – HEAT GUN

ROTOZIP SPIRAL CUTTING

RZ-2

- 5.0 Amp Power; 30,000 RPM
- Soft band handle for less vibration and more comfort & support for holding tool body
- Adjustable foot/base adjusts for cutting up to 1" thick
- Stronger housing for more protection if tool is dropped
- Cord guard protects cord from damage
- Includes: Removable handle with bit & wrench storage, 1/8", 5/32" and 1/4" collet and collet nut, also for use with Zip Bits and new XBITS

ZIP® BITS

STANDARD POINT BIT - ZB
For basic drywall cut-outs

SABRECUT™ BIT - SC
For a variety of materials from wood to fiberglass

WINDOW AND DOOR BIT - WD
To cut window and door openings in drywall

DURACUT™ BIT - DC
For cement board, stucco and plaster

FIBEROCK® BIT - FBR
For fiberock panels

GUIDEPOINT™ POINT BIT - GP
For controlled drywall cut-outs

TILECUT™ BIT - TC
For ceramic wall tile (only soft tile with glazing), cement board, stucco and plaster

Cat. No.	Pkg. Qty.
ZB10	10
WD1	1
WD10	10
GP10	10

Cat. No.	Pkg. Qty.
GP25	25
SC5	5
SC25	25
DC1	1

Cat. No.	Pkg. Qty.
FBR1	1
TC1	1
TC10	10

COLT™ PALM ROUTER KIT

PR20EVSK

- 1.0 HP, 5.7 Amp Motor
- Variable Speed 16,000 - 35,000 RPM
- Fast & Precise Depth Adjustment System
- Enhanced Bit Capacity accepts bits up to 1-5/16" in diameter
- Convenient Front Spindle Lock for easy bit changes
- Quick-clamp System Allows motor to be easily adjusted
- Includes: Straight Edge Guide, Carrying Case, Variable-speed Motor, Fixed Base, 1/4" Self-Releasing Collet and Drop-forged Wrench

2.25 HP ELECTRONIC FIXED BASE ROUTER

1617EVS

- 12 amp motor
- Variable Speed 8,000-25,000 RPM
- Coarse and microfine bit depth adjustment system with resettable depth indicator
- Constant-Response™ Circuitry – Monitors and maintains desired RPM for consistent performance
- Soft-start – Reduces start up torque
- Exclusive Precision Centering Design™
- Includes: 1/4" Collet Chuck, 1/2" Collet Chuck, Drop-Forged and Collet Nut Wrenches, Chip Shield, and Tool-Free Templet Guide Adapter

HEAT GUN

1942

- 23 CFM; 14.3 amp motor; 1,000°F max. temperature
- Powerful blower provides a high volume of air
- Air intake regulator adjusts the temperature to the requirements of the job
- Cool air setting for cooling tool
- Insulated nozzle protects operator
- Padded, adjustable stand allows stationary use with multi position holder
- Multiple uses: strip paint, shrink tubing or packings, heat liquids, loosen fittings, soften caulking and surface finishes, thaw pipes

This catalog contains items that we regularly stock . . . but we add new products all the time!

If you can't find what you need - Ask your Kass Representative!

Headquarters
BRONX, NEW YORK
Ph: 718-299-6060 • Fx: 718-299-1593
Toll Free: 800-255-0910

BOSCH SHEARS & NIBBLER

16 GAUGE SHEAR

1500C

Unishear®

- 4.2 amp motor; 5,000 SPM
- Clear view of cut line enables accurate pattern cutting
- Compact & well balanced for increased control and more maneuverability
- Steel deflector protects hands from flying metal particles
- Easy blade adjustment
- Convenient slide switch with lock-on for operator comfort during long demanding jobs
- 4 sharp cutting edges - upper & lower blades rotate at 90° intervals providing 4 times standard blade life
- Includes: Upper/Lower Blade Set, Feeler Gauge, 3mm Allen Wrench & Steel Deflector

10 GAUGE SHEAR

1507

Unishear®

- 8.6 amp motor; 1,770 SPM
- Two-handed control – for heavy cutting jobs
- Top handle with large rocker switch
- Low vibration – for operator comfort
- Visible blade – allows precise cutting
- Perfect for industrial maintenance departments and light structural fabrication shops
- Includes: Angled Gauge, Feeler Gauge, Turning Pin, 3mm & 5mm Allen Wrenches, 10mm Open End Wrench, Lower Blade, Upper Blade & Replacement Upper and Lower Blades

18 GAUGE NIBBLER

1529B

- 3.2 amp motor; 2,500 SPM
- Unique cutting head design for multiple types of corrugated steel
- Ejects chips downward away from operator and workpiece
- 3-Position head cuts forward, left and right
- Flat stock, corrugated, trapezoidal or full square stock all cut efficiently
- Small gear head allows cutting in confined areas
- No adjustment required when switching material thickness
- Includes: Die, Punch & 26 Gauge Die

14 GAUGE SHEAR

1506

Unishear®

- 4.6 amp motor; 2,400 SPM
- Planetary gear drive - more power per pound
- Lightweight & well balanced for excellent control
- Low vibration for operator comfort
- Visible blade allows precise pattern cutting
- Easy blade adjustment when switching material thickness
- Upper blade is double-edged - when first edge is worn, simply reverse blade
- Mushroom top handle for extra control under heavy cutting loads easily removed for cutting in confined areas
- Includes: Upper/Lower Blade Set & 5mm Allen Wrench

8 GAUGE SHEAR

1508

Unishear®

- 9.2 amp motor; 1,250 SPM
- Excellent for high alloy steel cutting
- Visible blade - allows precise cutting
- Top handle with large rocker switch
- Low vibration for operator comfort
- Auxiliary handle mounts on either side - for right or left-handers
- Ideal tool for structural fabrication shops as well as storage tank and rolling stock manufacturers
- Includes: Angled Gauge, Feeler Gauge, Turning Pin, Auxiliary Handle, 3mm & 5mm Allen Wrenches, 10mm Open End Wrench, Lower Blade, Upper Blade & Replacement Upper and Lower Blades

14 GAUGE NIBBLER

1530

- 4.6 amp motor; 2,400 SPM
- Burr-free edges – no finishing
- Corrugated, trapezoidal or full square stock – all cut efficiently with a simple cutter change
- Small gear head – allows cutting in confined areas
- No adjustment required when switching material thickness
- Worn cutters are changed in minutes with adjustable wrench
- Includes: Die & Punch

BOSCH DRYWALL SCREWGUN – DRILLS – HAMMER DRILLS

DRYWALL SCREWGUN

SG45

- 6.2 Amps, 0-4,500 RPM provides optimum speed for drywall installation and metal stud construction
- Variable Speed Trigger with Forward-Reverse Lever for increased control
- Compact and Ergonomic Design for increased comfort and control to drive screws all day
- Posi-Lok™ Nose Piece Design (patent pending) retains depth setting
- 70 in. lbs. of Torque — Best torque to weight ratio in its class
- One Hand Adjustable and Removeable Nose Piece
- Unique Trigger Design improves user comfort for all day use
- Lock-On Button for extended use applications
- Strong Bit Tip Magnet maximizes control when driving long screws
- Belt Clip frees up hands for other important tasks

CONVENIENT BELT CLIP

3/8" CORDED DRILL

1006VSR

- 6.3 amp motor; 0-2,600 RPM
- Best In Class Power-to-Weight Ratio
- Improved Lock-on Switch Design - Recessed in handle to prevent accidental lock-on
- New Soft Grip Handle Design for added comfort
- Oversized 2-Finger Trigger increases comfort when frequently changing drilling speed
- Service Minder Brushes - Automatically stops tool when brush replacement is needed
- Sturdy Belt Clip frees up hands to do other tasks
- Includes: 3/8" Jacobs Ratcheting Keyless Chuck

3/8" RIGHT ANGLE DRILL

1132VSR

- 3.8 amp motor; 0-1,100 RPM
- Low profile design is the ideal choice for drilling in close quarters
- Variable speed and reversing switch provides complete control for drilling, driving and removing screws
- Paddle-type switch provides extra control when turning tool off and on
- Variable speed dial matches speed to the application
- Includes: Chuck & Chuck Key

1/2" HAMMER DRILL

1194AVSR

- 8.0 amp motor
- 0-1,000/0-3,000 RPM
- 0-16,000/48,000 BPM
- 2 Speed gear box – Matches speed and torque to the job
- Dual mode selector – 2 modes of operation, rotation only and hammer drill mode
- Variable speed and reversing switch –Complete control for drilling, driving and removing bits or screws
- All ball and roller bearing construction – Smooth Power transmission and extended tool life
- Ergonomic handle with soft grip – Multiple gripping positions for increased comfort and control
- Includes: 360° Auxiliary Handle, Depth Gauge & Chuck Key

1/2" DUAL TORQUE HAMMER DRILL

1199VSRK

- High output 8.5 Amp motor; 0-1,100 / 0-3,000 RPM
- 0-18,000 / 0-48,000 BPM
- 1/2" - 3 jaw chuck for rugged hammer drilling applications
- Dual-Mode Selector easily converts from rotation only to hammer drill mode
- 2-Speed Gear Box and Variable-Speed Reversing Trigger
- 12 foot power cord with patented cord turret allowing cord to pivot 35°
- Integral slip clutch helps minimize torque reaction
- Metal Gear Housing For long life and rugged job site durability
- Includes: 360° Auxiliary handle, Depth Gauge and Carrying Case

Headquarters
BRONX, NEW YORK
Ph: 718-299-6060 • Fx: 718-299-1593
Toll Free: 800-255-0910

BOSCH ROTARY HAMMERS

7/8" SDS-plus® ROTARY HAMMER

11224VSR

- 6.9 Amps; 0-1,100 RPM; 0-6,150 BPM
- Multi-function selector - 3 modes of operation, rotation only, rotary hammer and hammer only mode
- Variable-speed reversing switch
- D-Handle grip provides extra control for overhead and vertical drilling
- Vario-Lock™ positioning rotates and locks chisel into 36 different positions
- SDS-plus® bit system for tool-less bit changes, plus secure bit holding
- Includes: Carrying Case, 360° Auxiliary Handle & Depth Gauge

1" SDS-plus® ROTARY HAMMER

11239VS

- 7.2 amp motor; 0-1,050 RPM; 0-4,000 BPM
- 2 modes of operation, rotation only and rotary hammer mode
- 360° side-handle with quick-adjust depth gauge
- Variable-speed switch for accurate bit starting
- Integral clutch helps minimize torque reaction
- Padded rear handle absorbs shock for operator comfort
- SDS-plus® bit system - tool-less bit changes, plus secure bit holding
- Includes: Carrying Case, 360° Auxiliary Handle & Depth Gauge

1" SDS-PLUS® BULLDOG EXTREME ROTARY HAMMERS

11253VSR

Pistol-Grip Design

- 7.2 Amp; 0-1,300 RPM; 0-5,800 BPM
- Multi-function Selector 3 modes of operation, rotation only, rotary hammer and hammer-only mode
- Vario-Lock™ Positioning Rotates and locks chisel into 36 different positions to optimize working angle
- Patented Rotating Brush Plate Provides equal power in forward and reverse
- Patented Cord Turret 35° pivot for added flexibility and longer cord life
- SDS-plus® Bit System Tool-free bit changes with automatic bit locking, dust protection and maximum impact energy transfer rate
- Variable-speed Reversing Trigger For accurate bit starting as well as removing fasteners or bound bits
- Pistol-Grip design
- Integral Clutch Helps minimize torque reaction
- Includes: Auxiliary Handle, Depth Gauge and Carrying Case

11255VSR

D-Handle Design

BOSCH ROTARY HAMMERS & ACCESSORIES

1⅛" SDS-plus® ROTARY HAMMER
11236VS

- 7.5 amp motor; 0-850 RPM; 0-3,900 BPM
- 3 modes of operation, rotation only, rotary hammer and hammer only mode
- Vario-Lock™ positioning rotates and locks chisel into 36 different positions
- Integral clutch helps minimize recoil in high-torque situations
- Padded rear handle absorbs shock for operator comfort
- SDS-plus® bit system - tool-less bit changes, plus secure bit holding
- Includes: Carrying Case, 360° Auxiliary Handle & Depth Gauge

1⅛" SDS-plus® ROTARY HAMMER
11222EVS

- 7.8 amp motor; 300-700 RPM; 1,650-3,900 BPM
- Constant-Response™ Circuitry - Provides soft-start and constantly monitors and adjust power to maintain desired RPM
- Variable speed dial - For accurate bit starting and controlled chipping applications
- SDS-plus® bit system - Tool-less bit changes, with automatic bit locking, dust protection and maximum impact energy transfer rate
- 3 Modes of operation - Rotation only, rotary hammer and hammer only mode
- Includes: 360° Auxiliary Handle, Depth Gauge & Carrying Case

1¾" SDS-max® ROTARY HAMMER
11235EVS

- 13.0 amp motor; 120-250 RPM; 1,000-2,400 BPM
- Constant-Response™ circuitry - monitors and adjusts power to maintain desired RPM
- Dual-function control quickly converts from hammer only to hammer with rotation
- Vario-Lock™ positioning rotates and locks chisel into 36 different positions
- Integral clutch helps minimize recoil in high-torque situations
- Padded rear handle - absorbs shock for operator comfort
- SDS-max® bit system - Tool-less bit changes, with automatic bit locking
- Includes: 360° Auxiliary Handle & Carrying Case

ROTARY HAMMER ACCESSORIES

SDS-PLUS® HAMMER STEEL CHISELS

FOR USE WITH HAMMERS WITH HAMMER ONLY MODE CAPABILITY OR CHIPPING ADAPTER

Cat. No.	Description
HS1415	Point - 10" L.
HS1420	Chisel - 3/4" x 10" L.
HS1425	Wide Chisel - 1-1/2" x 10" L.



1/2" CAPACITY CHUCK WITH INTEGRAL SDS SHANK

USE FOR STRAIGHT SHANK HAMMER DRILL BITS FOR ALL SDS HAMMERS

Cat. No.	Description
1 681 571 014	Chuck and Key
1 610 508 015	Replacement Dust Boot
CRK005	Replacement Chuck Key



Headquarters
BRONX, NEW YORK
Ph: 718-299-6060 • Fx: 718-299-1593
Toll Free: 800-255-0910

BOSCH COMBINATION HAMMERS

1 9/16" SDS-max® COMBINATION HAMMER

11240

- 10.0 amp motor; 400 RPM; 3,000 BPM
- Impact energy: 5.2 ft./lbs.
- Dual mode converts from rotary hammer to hammer only mode
- SDS-max® bit system - tool-less bit changes
- Includes: 360° Auxiliary Handle & Carrying Case

1 9/16" SDS-max® COMBINATION HAMMER

11241EVS

- 11.0 amp motor; 170-340 RPM; 1,700-3,300 BPM
- Impact energy: 6.2 ft./lbs.; Turbo mode: 7.4 ft./lbs.
- Vario-Lock™ positioning rotates and locks chisel into 12 different positions to optimize working angle
- Dual Mode easily converts from rotary hammer to hammer only mode
- Includes: 360° Auxiliary Handle & Carrying Case

2" SDS-max® COMBINATION HAMMER

11245EVS

VARIABLE SPEED DIAL

- 14.0 amp motor
- 120-250 RPM
- 1,100-2,500 BPM
- High capacity design able to use 2" spiral bits, 3-1/8" thru hole bits and 6" core bits
- 2 modes of operation: hammer with rotation and hammer only
- SDS-max® bit system for tool-free bit changes with automatic bit locking, dust protection and maximum impact energy
- Improved tool holder with advanced heat treatment and dust seal protection for long life
- Includes: 360° Auxiliary Handle & Carrying Case

1 9/16" SPLINE COMBINATION HAMMER

11247

- 11.0 amp motor; 170-340 RPM; 1,700-3,300 BPM
- Impact energy: 6.2 ft./lbs.; Turbo mode: 7.4 ft./lbs.
- Service modules for brushes and cord
- Dual Mode easily converts from rotary hammer to hammer only mode
- Turbo™ Power delivers 20% more power in hammer only mode
- Auto-Max™ Dial ensures 100% power every start-up
- Constant Response™ Circuitry provides soft start and maintains constant speed under load with overload protection
- Patented cord turret provides added flexibility and reduces cord wear
- Vario-Lock™ positioning rotates and locks chisel into 12 different positions to optimize working angle
- Includes: 360° Auxiliary Handle & Case

1 9/16" SPLINE COMBINATION HAMMER

11248EVS

- 10.0 amp motor; 400 RPM; 3,000 BPM
- Impact energy: 5.2 ft./lbs.
- Service modules for brushes and cord
- Impact mechanism delivers maximum transmission of power
- Dual mode easily converts from rotary hammer to hammer only mode
- Spline/round hex bit system for tool-free bit changes, with automatic bit locking
- "Combination" dual mode selector - 2 modes of operation, rotary hammer and hammer only mode
- Vario-Lock™ positioning - rotates and locks chisel into 12 different positions to optimize working angle
- Includes: 360° Auxiliary Handle & Carrying Case

BOSCH DEMOLITION HAMMERS

SDS-max® DEMOLITION HAMMER

11316EVS

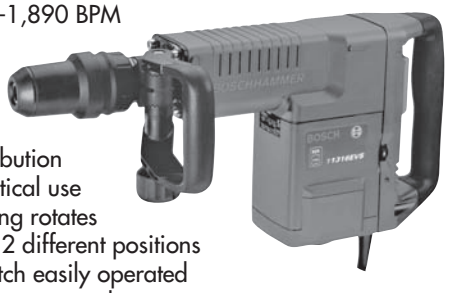

- 14.0 amp motor; 900-1,890 BPM
- Constant-response™ circuitry - monitors and adjusts power to maintain desired RPM
- Balanced weight distribution for horizontal and vertical use
- Vario-Lock™ positioning rotates and locks chisel into 12 different positions
- Large on/off slide switch easily operated
- Variable speed dial for accurate bit starting
- Padded rear handle absorbs shock
- SDS-max® bit system - tool-less bit changes, with automatic bit locking
- Includes: 360° Auxiliary Handle & Carrying Case

3/4" HEX DEMOLITION HAMMER

11317EVS

- 12.8 amp motor; 850-1,800 BPM
- 3/4" hex tool holder
- Service light indicator
- Assist handle pivots and rotates 360°
- Integrated anti-vibration mechanism
- Padded handles to reduce vibration
- Electronic dial control to optimize impact level and removal rate
- Compact design for both horizontal and vertical demolition
- Includes: 360° Auxiliary Handle & Carrying Case

SDS-MAX™ DEMOLITION HAMMER

11321EVS

- 13.0 amp motor; 1,300 - 2,900 BPM, weighs 13.9 lbs.
- Unmatched Power to Weight Ratio: Produces 8.1 ft. lbs. Impact Energy
- Active Vibration Control™ provides maximum user comfort for extended periods of work
- Constant Response Circuitry maintains speed under load and overload protection
- Articulating Auxiliary Handle helps maintain the best working posture possible
- Vario-Lock™ Positioning rotates and locks chisel into 12 different positions
- Auto-Max™ Variable Speed Dial ensures maximum speed every time the tool is turned on
- Service Minder™ light indicates when maintenance is required
- Patented cord turret reduces cord wear
- Includes: 360° Auxiliary Side Handle and Carrying Case

ROUND-HEX DEMOLITION HAMMER

11387

- 10.0 amp motor; 2,800 BPM
- Round hex tool holder for tool-free demolition steel changes, with automatic locking
- Service Minder™ light indicates when preventative maintenance is required
- Vario-Lock™ positioning rotates and locks chisel into 12 different positions
- Innovative service modules are designed so a qualified service technician can quickly replace the brushes and cord
- Includes: 360° Auxiliary Handle & Carrying Case

BRUTE™ BREAKER HAMMER KIT WITH PREMIUM HAMMER HAULER

11304KD

- The plug-in anywhere hammer — Does not need a compressor
- Operates on 115/120V AC/DC, 15 amp outlet or 2500 watt portable generator; 1,400 BPM
- 8" Foam Tires - Never flat tires absorb shock over rugged terrain
- Folding Foot Plate easily folds out of the way for use as a hand truck
- Truck Ramp for easy loading in and out of a truck or van
- Accessory Holders securely holds hammer steel in place during transportation
- ServiceMinder™ brush system shuts the Brute™ off when brush replacement, lubrication or maintenance is needed
- Grease packed gear box and hammer mechanism eliminates uncertainty of job site lubrication
- 2-way tool retainer accepts standard 1-1/8" hex, air tool steel with retaining collar of Bosch internal combo steel
- Shock mounted handles absorb vibration to reduce operator fatigue
- Kit Includes: Breaker Hammer, Hammer Hauler Cart, Quick-Release Strap, 2 Star Point Chisels, 2 Narrow Chisels

Headquarters
BRONX, NEW YORK
Ph: 718-299-6060 • Fx: 718-299-1593
Toll Free: 800-255-0910

BOSCH LITHEON™ CORDLESS TOOLS

Bosch Litheon™ Batteries - State-of-art Lithium-ion battery technology coupled with Bosch's proprietary ECP (Electronic Cell Protection) system guarantees the optimal performance of tool and batteries even for tough work conditions. Designed for maximum cyclelife, minimum self-discharge and no memory effect.

18V LITHEON™ COMPACT TOUGH™ DRILL DRIVER

36618-02

- New Compact Tough™ Design for increased maneuverability in tight spaces and less user fatigue
- High torque mode produces over 500 in. lbs. (Dynamic Torque)
- High speed mode produces 1,600 RPM
- 20 Position Clutch and Variable Speed Wide Trigger for increased control
- Durashield™ Housing designed to withstand real world conditions
- Ratcheting, Single Sleeve 1/2" Chuck for one-handed bit changes
- LED Light illuminates dark or enclosed areas
- Includes: (2) 18V Litheon™ SlimPack Batteries, 30-minute Litheon™ Battery Charger, Double-ended Bit and Carrying Case

18V LITHEON™ BRUTE TOUGH™ DRILL DRIVER

37618-01

- High torque mode produces over 650 in. lbs.
- High speed mode produces 1,800 RPM
- 25 Position Clutch and Variable Speed Trigger for increased control
- Durashield™ Housing designed to withstand real world conditions
- Newly Designed Powertrain and Gears increases tool life and durability
- 1/2" Metal Chuck for increased durability
- LED Light illuminates dark or enclosed areas
- Ergonomic soft grip handle for extended comfort and control
- Includes: (2) 18V Litheon™ FatPack Batteries, 30-minute Litheon™ Battery Charger, Magnetic Bit Holder, Philips Drive Bit, Auxiliary Handle and Carrying Case

18V LITHEON™ IMPACTOR™ DRIVER

25618-02

- High Performance Motor and All Metal Gears Deliver 2,800 RPM/3,200 BPM
- Produces 1,500 in.-lbs. (125 ft.-lbs.) of Dynamic Torque
- Variable-speed trigger for complete control
- Compact Impactor™ Design for increased maneuverability in tight spaces
- Built-In LED Light illuminates dark corners or enclosed areas
- Spring-Loaded Impact Mechanism reduces user fatigue
- 1/4" hex drive with Quick Release
- Includes: (2)18V Litheon™ SlimPack Batteries, 60-minute Litheon™ Battery Charger, Double-ended Phillips Bit, Belt Clip and Carrying Case

18V LITHEON™ BRUTE TOUGH™ HAMMER DRILL DRIVER

17618-01

- High torque mode produces over 650 in. lbs.
- High speed mode produces 2,050 RPM, up to 30,750 BPM
- 25 Position Clutch and Variable Speed Trigger for increased control
- Durashield™ Housing designed to withstand real world conditions
- Newly Designed Powertrain and Gears increases tool life and durability
- 1/2" Metal Chuck for increased durability
- LED Light illuminates dark or enclosed areas
- Ergonomic soft grip handle for extended comfort and control
- Includes: (2) 18V Litheon™ FatPack Batteries, 30-minute Litheon™ Battery Charger, Magnetic Bit Holder, Philips Drive Bit, Auxiliary Handle and Carrying Case

18V 2-TOOL LITHEON™ COMBO KIT

CLPK23-180

Kit Includes:

- 18V Litheon™ Impactor™ Driver (Model 25618 Featured Above)
- 18V Litheon™ Compact Tough™ 1/2" Drill Driver - (Model 36618 Featured Above)
- (2) 18V Litheon™ SlimPack Batteries, Fast Charger and Jobsite Bag

SKIL SKILSAW® CIRCULAR SAWS – JIG SAW – DRILL / DRIVER

7¼" CIRCULAR SAW

5480-01

- 13 amp motor; 2.3 HP; 5,300 RPM
- Two-Point Line of Sight-For cutting straight lines with ease
- Patented anti-snag lower guard reduces snags when making narrow cut-offs
- Rear lever depth adjustment assures desired cut depth
- Safety Lock / Guarded Trigger minimizes accidental starts
- Ball Bearing Motor Construction for increased durability, twice the life
- Includes: 18-Tooth Carbide Blade and Blade Wrench

7¼" CIRCULAR SAW

5680-01

- 13 amp motor; 2.4 HP; 5,300 RPM
- Accu-Sight™ keeps your cut on line
- Patented anti-snag lower guard reduces snags when making narrow cut-offs
- Rear View Depth Adjustment for clear visibility & quick cut-depth changes
- Safety Lock / Guarded Trigger minimizes accidental starts
- On-Tool Wrench Storage for quick and easy blade changes
- Ball Bearing Motor Construction for increased durability, twice the life
- Aluminum upper and lower guards
- Dust port accepts standard shop-vac hose

3/8" DRILL / DRIVER

6237-04

- Powerful 5.0 Amp Motor
- 2 Finger Variable Speed Control for drilling, driving and removing screws
- Keyless Chuck for fast, easy bit changes
- Soft-Grip design for added comfort and control
- Built-in Level ensures straight, accurate drilling
- On-Tool Bit Storage keeps bits handy
- Includes: Two Double-Ended Bits

6½" WORM DRIVE CIRCULAR SAW

HD5825



- 12.0 amp motor; 4,600 RPM
- 8-foot, 3-wire grounded rubber cord
- Oil indicator level and relief bellows for long life
- 2" max depth of cut at 90°; 1-3/4" max depth of cut at 45°
- Solid aluminum die cast motor and gear housings
- 22 amp switch and heavy gauge cord for dependability
- Includes 36-tooth combination blade and wrench, 6-1/2" combination blade & blade wrench

7¼" WORM DRIVE CIRCULAR SAW

SHD77

- Powerful 15 Amp Motor
- Patented anti-snag lower guard reduces snags when making narrow cut-offs
- 20 amp switch and heavy gauge cord
- Die-cast aluminum motor and gear housings for durability
- Push button spindle lock for easy blade changes
- Oil indicator level and relief bellows for long life
- Two position saw hook for safe rafter placement
- Includes:7-1/4" 24-Tooth "Impact Resistant" Carbide Blade and Blade Wrench

8¼" WORM DRIVE CIRCULAR SAW

HD5860

- 13.0 amp motor; 4,300 RPM
- All ball bearings
- 8-foot, 3-wire grounded rubber cord
- Oil indicator level and relief bellows for long life
- Exclusive 60° bevel feature with 8-1/4" blade
- 2-7/8" max depth of cut at 90°; 1-1/2" max depth of cut at 60°; 2-1/4" max depth of cut at 45°
- Die cast aluminum motor and gear housings for durability
- 22 amp switch and heavy gauge cord for dependability
- Includes 8-1/4" combination blade & blade wrench

VARIABLE SPEED JIGSAW

4290-02

- Powerful 4.5 Amp Motor; 800-3,250 SPM
- Cutting Capacity: 1-1/4" hard wood, 2" soft wood, 3/16" mild steel, 3/8" aluminum
- Quick change open foot design improves visibility of cut line
- Variable speed adjusts for clean or fast cuts
- Dust blower keeps cut line clear
- Tool-less blade change accepts both T and U shank blades
- 2-Finger Variable Speed Trigger adjusts speed to cut
- Includes: One Blade

Headquarters
BRONX, NEW YORK
Ph: 718-299-6060 • Fx: 718-299-1593
Toll Free: 800-255-0910

Milwaukee CIRCULAR SAWS & CUT-OFF MACHINES

7¼" - HEAVY-DUTY 15.0 AMP TILT-LOK® CIRCULAR SAW

- Exclusive adjustable main handle - the 8-position locking handle adjusts to the cutting application for maximum comfort and control
- 15.0 AMP - most powerful circle saw cuts tough materials including headers, microlams and wet lumber with ease
- Maximum power-to-weight ratio - lightest 7-1/4", 3.25 max hp circular saw
- Fast, smooth adjustments - depth lever and bevel adjustments easy to access and operate
- Cushion front grip/rear handle - maximizes comfort and control
- Convenient bevel scale - scale faces operator for quick and accurate bevel adjustment
- Includes: carbide blade and hex blade wrench

6390-20

Cat. No.	Blade Size	Volts	Amps	No Load Speed RPM	Arbor	Depth Of Cut At 90°	Depth Of Cut At 50°	Depth Of Cut At 45°
6390-20	7-1/4"	120 AC-DC	15.0	5800	5/8"	2-7/16"	1-11/16"	1-13/16"

8" METAL CUTTING SAW

- Dry-cut technology for faster, cleaner, more affordable metal cutting
- Durable blade shield with integral chiptank deflects/collects hot chips and sparks
- Plunge lever for fast, effective plunge cuts
- Exclusive quick-release shield latch for fast waste disposal and blade changes
- Premium cermet-tipped blades cut faster, cleaner, and longer than other carbide-tipped or friction blades
- Includes: Hex Blade Wrench and Circular Saw Blade

6370-20

Cat. No.	Blade Size	Volts	Amps	No Load Speed RPM	Arbor	Depth Of Cut At 90°	Depth Of Cut At 50°	Depth Of Cut At 45°
6370-20	8"	120 AC	13.0	3700	1"	2-9/16"	—	—



6176-20

14" - HEAVY-DUTY ABRASIVE CHOP SAW

- 14" wheel size
- One piece carrying handle
- Spindle lock for convenient changing of abrasive wheels
- Pivoting wheel guard • Easily accessible brushes
- Use for adjustable angle cutting to 45° with speed & added versatility
- Includes: vise, abrasive wheel and hex wrench

FOR USE WITH ABRASIVE CUT-OFF WHEELS (14" X 3/32" X 1")

Cat. No.	Volts AC/DC	Amps	Max. Power Output (Watts/HP)	No Load RPM	Arbor Size	Capacities O.D. Pipe Diameter	Bar Stock	Square Stock	Max. Opening
6176-20	120	15	2400/3.2	3900	1"	5"	3-5/8"	5"	9"



6190-20

14" - DRY-CUT MACHINE

- Powerful 4.8 max HP motor, 15 amp motor (1,500 rpm)
- Utilizes dry cut technology which cuts on average three times faster than an abrasive machine
- Produces little to no sparks when cutting and leaves a virtually burr-free finish
- Tool-free fence and vise system
- Heavy-duty cast aluminum base reinforced with a 1/4" steel plate
- Includes: 72 tooth blade and hex key

Cat. No.	Volts AC/DC	Amps	(Max./HP)	No Load RPM	Arbor Size	Capacities O.D. Pipe Diameter	Bar Stock	Square Stock	Max. Opening
6190-20	120	15	4.8/3.2	1500	1"	5-3/8"	—	5"	8"

RECIPROCATING SAWS

HEAVY-DUTY SAWZALL®

- Quik-Lok™ blade clamp for fast, easy blade changes
- Adjustable pivot shoe allows more efficient use of blade and depth-of-cut control
- Heavy-duty cord positioned for easier plunge cutting
- Easy access to pivot shoe adjusting screws
- All ball and roller bearings
- Includes: two Super Sawzall® blades, 8′ two-wire rubber cord and impact resistant carrying case

6509-22

HIGH PERFORMANCE SAWZALL PLUS®

- Pivot shoe for maximum support against work surface
- Accepts standard 1/2″ shank Sawzall® blades
- Keyless adjustable shoe allows more efficient use of blade and depth-of-cut control
- Heavy-duty steel Quik-Lok™ blade clamp system
- Includes: 2-pack Super Sawzall® blades, 8′ three-wire rubber cord and impact resistant carrying case

6519-22

ORBITAL SUPER SAWZALL®

- High powered 13 amp motor for fast orbital cutting action
- Counter balance for smoother operation with less vibration
- Gear protecting clutch allows the saw to withstand impacts
- Quik-Lok™ blade clamp provides fast and easy blade changes
- Includes: Carrying Case and (2) Super Sawzall® Blades

6536-21

360° ROTATING HANDLE ORBITAL SUPER SAWZALL®

- 360° continuous rotating handle locks at 45° increments
- Trigger can stay on while rotating
- High powered 13 amp motor for fast orbital cutting action
- Speed dial for repetitive cuts, counter balance for smoother operation with less vibration
- Quik-Lok™ blade clamp and cord for easy field replacement
- Includes: Carrying Case and (2) Super Sawzall® Blades

6523-21

SUPER SAWZALL®

- 15.0 Amp Milwaukee Motor with highest overload protection in the industry
- Constant Power Technology™ - maintains constant speed under load
- Patented Gear Protecting Clutch extends gear and motor life
- Patented Counter Balanced Mechanism delivers smoothest running with lowest vibration
- Variable speed trigger and dial speed control
- Quik-Lok™ Blade Clamp System - provides fast and easy blade changes
- Includes: Impact resistant carrying case and (1) Super Sawzall® Blade

6538-21

Cat. No.	Volts	Amps	Strokes Per Minute	Quik-Lok Blade Clamp	Length Of Stroke	Overall Length	Net Wgt.	Ship. Wgt.
6509-22	120 AC Only	11	0-2800	YES	3/4″	17-1/3″	7.0 lbs.	11.3 lbs.
6519-22	120 AC Only	11	0-2800	YES	1-1/8″	17-3/4″	7.0 lbs.	11.3 lbs.
6536-21	120 AC Only	13	0-3000	YES	1-1/4″	18-3/4″	9.8 lbs.	14.4 lbs.
6523-21	120 AC Only	13	0-3000	YES	1-1/4″	19″	10 lbs.	14.9 lbs.
6538-21	120 AC Only	15	0-2800	YES	1-1/4″	18-3/4″	9.8 lbs.	14.4 lbs.

Headquarters
BRONX, NEW YORK
Ph: 718-299-6060 • Fx: 718-299-1593
Toll Free: 800-255-0910

Milwaukee BAND SAW & JIG SAWS

DEEP CUT PORTABLE ELECTRIC BAND SAW

- Trigger speed control
- Large 4-3/4" x 4-3/4" rectangular capacity - 4-3/4" round capacity
- All ball and roller bearings
- Optimum speed range cuts pipes, bolts, rebar, angle iron, tracks and other profiles in a variety of materials
- High torque worm gear & chain drive mechanism for optimum motor torque transfer & durability
- Includes: one 14-tooth Super-Tough® bi-metal blade and impact resistant carrying case

6232-6

Cat. No.	No Load Surface Ft. Per Min.	Volts	Amps	Length
6232-6	0-350	120 AC Only	6.0	19-3/4"

HEAVY-DUTY T-SHANK FAST CUTTING JIG SAWS

6268-21
TOP HANDLE

6276-21
BODY GRIP

- Uses T-Shank blades
- Keyless 45° bevel adjustment (both directions - Model 6268-21)
- Orbital action with 4 adjustment levels for faster cutting
- Full 1" orbital blade stroke provides fast ripping or fine cutting
- Quik-Lok blade change system - no tools required
- Ten position dust blower and built in dust collection port allows attachment to vacuum (Model 6276-21 only)
- Both models include: anti-splintering device, two accessory blades, plastic shoe cover and carrying case

Cat. No.	Speed Type	Volts	Amps	Strokes Per Minute	Length	Weight	Height
6268-21	Variable	120 AC Only	6.5	0-3000	9-1/2"	6.4 lbs.	8-7/8"
6276-21	Variable	120 AC Only	6.2	500-3000	11-3/4"	5.0 lbs.	7-1/2"

4-1/2" ANGLE GRINDER

6148-30

Features paddle switch with lock-on
Also Includes: 4-1/2" wheel and contractor bag

6148-31

Features paddle switch without lock-on

6148-33

Features Slide Switch

- 10.0 Amp, 1,250 MWO Motor delivers power with high overload protection
- Debris Baffles protect internal components by deflecting damaging debris
- Multi-Port Exhaust reduces motor burn-up by efficiently venting hot air
- 25% Longer Lasting Epoxy Protection extends motor life by protecting the copper wire
- Soft Grip 3-Position Handle-provides optimal control during applications
- Tool free burst resistant guard with positive detents that hold the guard in place
- All Models Includes: Side handle, Type 27 guard, spanner wrench and flanges

MAGNUM® DRILLS & HAMMER-DRILL

3/8" HEAVY-DUTY MAGNUM® DRILL WITH KEYED CHUCK

0200-20

- Powerful 7.0 AMP motor
- Trigger, variable speed control, reversing
- All metal gear case and diaphragm supplies greater support for shaft and bearings
- Ergonomic tactile grip on handle and motor housing
- Two-finger trigger switch
- Modular brush card design
- All ball and roller bearings
- Includes: 360° side handle, 3/8" chuck, chuck key, spare brush and flexible key holder

1/2" HEAVY-DUTY MAGNUM® DRILL WITH KEYED CHUCK

0234-6

- Powerful 5.5 AMP motor
- Heavy-duty industrial chuck
- Removable brush cartridge system - change brushes in less than one minute
- Aluminum gear case and diaphragm supplies greater support for shaft and bearings
- Trigger speed control reversing switch
- All ball and roller bearings
- Includes: 8' 3-wire Quik-Lok® cord, chuck, chuck key, rubber flex key holder, spare brush and side handle

Cat. No.	Cap. In Steel	Volts AC Only	Amps	No Load RPM	Gear Train	Spindle Diameter & Thread	Replacement Chuck Cat. No. Chuck Key Included	Replacement Chuck Key Cat. No.	Length (In.)
0200-20	3/8"	120	7.0	0-1200	Double	1/2"- 20	48-66-0806	48-66-3080	12
0234-6	1/2"	120	5.5	0-850	Double	1/2"- 20	48-66-1360	48-66-3280	10-1/2

1/2" DUAL SPEED HAMMER-DRILL

5387-20

- Heavy duty Hammer-Drill can handle up to 3/4" holes in concrete
- Durable metal gear case and light weight balanced design
- Removable side handle also assists in setting the depth rod for pre-set hole drilling
- Use for drilling in wood with Flat Boring Bits, Hole Saws, Auger Bits and Selfeed Bits
- Can also drill in steel with Twist Bits and in concrete with Percussion Bits
- Includes: Depth Gauge and Side Handle

Cat. No.	Amps	RPM Low/High	Blows Per Minute Low/High
5387-20	8.5	0-1,000/0-2,500	0-16,000/0-40,000

Headquarters
BRONX, NEW YORK
Ph: 718-299-6060 • Fx: 718-299-1593
Toll Free: 800-255-0910

Milwaukee DRILLS & DRILL PRESS

RIGHT ANGLE DRILL KITS

- 1/2" trigger speed control reversing
- 7 AMP motor
- Helical cut, heat treated gears
- All ball and roller bearings
- Durable, glass reinforced nylon handles
- Steel hardened shafts
- Quadruple gear train
- Use with up to 4-5/8" selfeed bits on models 3107-6 & 3102-6 only
- Head and handle swivel 360° - can be locked tight in any position - allow 5-1/2" for right angle drill head and chuck
- Includes: 9/16" open end wrench, 3/16" socket wrench, chuck remover bar, side handle & impact resistant case on all models, model 3107-6 also includes: 8' 3-wire Quik-Lok® cord set

ALL MODELS INCLUDE IMPACT RESISTANT CARRYING CASE

3002-1 / 3102-6 / 3107-6

Cat. No.	Capacity Steel	Volts AC Only	Amps	No Load RPM Drill Only	Includes Drill No.	RPM W/RAD Low Side	RPM W/RAD High Side
3002-1 ELECTRICIANS'	1/2"	120	7.0	0-600	1001-1	0-400	0-900
3102-6 PLUMBERS'	1/2"	120	7.0	500	1101-1	335	750
3107-6 VARIABLE SPEED	1/2"	120	7.0	0-500	1107-6	0-335	0-750

HEAVY-DUTY SUPER-HAWG® DRILL

- 13 AMP motor
- Low speed clutch
- Rotating handle - Roto-Lok™ 90° left/right rotation for most comfortable grip position
- Cushion grips provide more comfortable gripping
- Easy access brus covers make it simple to replace brushes

1680-20

Cat. No.	Capacity In Steel (Inches)	RPM Low/High	Gear Train	Length (Inches)
1680-20	1/2	1750/450	Triple	22

HEAVY-DUTY HOLE-HAWG® DRILL

- 7.5 AMP motor
- 2 position pipe handle
- 3 position spade handle
- Two speed gear shift
- External brush caps
- All ball and roller bearings
- Power and torque, reversing, compact design for drilling between studs and joists
- Can power up to 4-5/8" selfeed bit in low speed and drill up to 1-3/8" selfeed bit in high speed

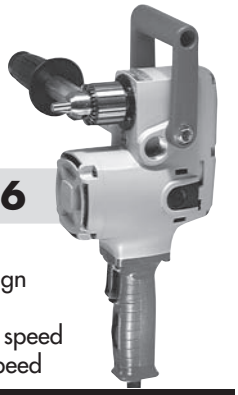

1675-6

Cat. No.	Capacity In Steel (Inches)	RPM Low/High	Gear Train	Length (Inches)
1675-6	1/2	300/1,200	Triple	6-1/2

HEAVY-DUTY - COMPACT ELECTROMAGNETIC DRILL PRESS

A great choice for remote drilling in metal. The entire tool weighs just 26-1/2 pounds and has a comfortable carrying handle well positioned for balance, with cutter wrenches stored on-board. This is a very portable machine. However, power was not sacrificed for portability. This drill press includes a very powerful 1.1 maximum horsepower, 9.0 amp motor. It can drill up to 1-1/2 in. diameter holes through 2 in. thick steel with annular cutters, or 1/2 in. diameter holes 4-1/4 in. deep with twist drill bits. The tool is setup to accept standard 3/4 in. shank cutters. The strong two-coil magnet provides 2,300 lbs. of deadlift force on 1 in. thick steel. The simple two-button control panel is located on the back, away from feed handle obstruction. The feed handle can be conveniently relocated to the opposite side without the use of tools.

- Includes: lubricant spray bottle, nylon safety strap and two hex wrenches

4270-20

Cat. No.	AC Only	Amps	RPM	Length	Height
4270-20	120	9.0	450	9-3/8"	15-1/3"

Milwaukee ROTARY HAMMERS

3/4" SDS DRIVE PISTOL GRIP ROTARY HAMMER

- 3/4" solid bit capacity, 1-3/4" core bit capacity
- Variable speed: 0-1270 rpm, 0-5400 bpm, reversing
- Powerful 6.0 amp motor provides 1.7 ft.-lbs. of energy per blow
- Two modes of operation: rotation with hammering and rotation only
- Speed control switch allows for controlled starts for less bit walk
- Lightweight, compact and well balanced design with ergonomically shaped cushioned grip
- Includes: Depth gauge, side handle and carrying case

5383-21

1" COMPACT SDS ROTARY HAMMER

- 0-5,980 BPM; 0-1,400 RPM
- High power 7.0 amp reversible motor delivers 2.0 ft-lbs of impact energy
- Anti-Vibration System, soft grip handle and two-finger trigger for optimal comfort
- All metal gear case and block construction for optimal bearing and gear seating
- Three modes of operation - hammer drill, drill and chipping
- Rotating Brush Plate for equal power in forward and reverse
- Compact, lightweight, L-shape design provides excellent balance
- Includes: Depth gauge, side handle and carrying case

5363-21

Cat. No.	Volts	Amps	Blow Energy	Clutch	Solid Bit Capacity	Thin Wall Core Bit Capacity	No Load Speed/RPM	No Load BPM	Handle Style	Length	Tool Wgt.
5383-21	120 AC	6	1.7 ft.-lbs.	Yes	3/4"	1-1/2"	0-1,270	0-5,000	Pistol	13"	5.7 lbs.
5363-21	120 AC	7	2.0 ft.-lbs.	Yes	1"	2-1/2"	0-1,400	0-5,980	D-Handle	12-1/4"	7.9 lbs.

1-3/4" SDS-MAX ROTARY HAMMER

- 14 Amp, 1,300 MWO Milwaukee Motor provides best in class power and highest overload protection
- Heavy duty crank piston mechanism delivers hard hitting 8.8 ft.-lbs. impact energy
- 450 RPM and 2,840 BPM delivers fast drilling even in the toughest concrete
- 2 Speed Impact Mode: low and 2,200 BPM for light materials
- Constant Power Technology maintains drilling speed and power under load
- Mechanical Clutch protects the gears and provides added control
- Anti Vibration System actively reduces user vibration

5426-21

SDS-MAX DEMOLITION HAMMER

- 14 Amp, 1,300 MWO Milwaukee Motor provides best in class power and highest overload protection
- Heavy duty crank piston mechanism delivers hard hitting 8.8 ft.-lbs. impact energy
- 2 Speed Impact Mode: low reduces beats per minute (2,200 BPM) for light materials
- Constant Power Technology maintains drilling speed and power when the tool is under load
- Anti Vibration System actively reduces user vibration and increases productivity
- Variable Position Chisel Stop- fixes the chisel in 12 different positions for various applications
- D-Handle provides optimal grip and control for chiseling applications

5446-21

Headquarters
BRONX, NEW YORK
Ph: 718-299-6060 • Fx: 718-299-1593
Toll Free: 800-255-0910

Milwaukee SCREWDRIVERS

GENERAL PURPOSE SCREWDRIVERS

- 6.5 AMP motor
- All ball and roller bearings
- Ramp-off depth locator
- Two-finger trigger switch
- 10′ 2-wire rubber cord
- Modular brush card design
- All metal gear case & diaphragm
- Removable belt clip with integral bit storage
- Ergonomic tactile grip on handle and motor housing
- 6740-20 includes: #2 drywall bit tip, magnetic bit tip holder, belt clip & drywall locator assembly
- 6790-20 includes: 5/16″ hex socket driver, belt clip & self drill fastener depth locator assembly

6740-20
IDEAL FOR DECKING - DRYWALL - FRAMING

6790-20
IDEAL FOR DRIVING SELF-DRILLING TAPPING TEKS® FASTENERS

DRYWALL SCREWDRIVER

- 6.5 AMP motor
- Ramp-off depth locator
- All ball and roller bearings
- 10′ 2-wire rubber cord
- Quiet snap-action clutch
- Modular brush card design
- All metal gear case and diaphragm
- Includes: #2 drywall bit tip, magnetic bit tip holder, belt clip & drywall locator assembly

BEST POWER TO WEIGHT RATIO

6742-20

Cat. No.	Volts AC Only	Amps	RPM	Bit Shank Size	Spindle Offset	Length
6740-20	120	6.5	0-2,500	1/4″ Hex	.92″	13-1/8″
6790-20	120	6.5	0-2,500	1/4″ Hex	.92″	12-1/8″
6742-20	120	6.5	0-4,000	1/4″ Hex	.92″	12-3/4″

M12™ CORDLESS COMPACT SCREWDRIVER

- Quick Bit-Loading 1/4″ Hex Chuck for one handed bit insertion and release
- Battery Fuel Gauge for displaying remaining run-time
- Metal Gear Housing for job site durability
- Built-in LED for illumination of dark work spots
- Variable Speed Trigger for output power control
- Over-mold Side and Grip for secure grip and work surface protection
- Includes: 12V Lithium-Ion battery pack, 12V charger, compact driver storage bag and #2 Phillips 1/4″ hex insert bit

2401-22

M12™ CORDLESS 3/8″ SQUARE DRIVE IMPACT WRENCH

- Powerful Impact Mechanism delivers up to 1,000 in.-lbs. of torque
- Compact design at only 2.3 lbs.
- 3/8″ Anvil w/Friction Ring Retention for easy socket insertion/release
- On-Board Fuel Gauge displays remaining run-time
- Built In L.E.D light illuminates work surface
- Includes: (2) 12V Lithium-Ion batteries, charger and carrying case

2451-22

M18™ LITHIUM-ION CORDLESS TOOLS

M18™ 1/2" DRILL DRIVER AND HAMMER-DRILL DRIVER

2611-24

1/2" Hammer-Drill Driver

2610-24

1/2" Drill Driver

- 18V XC High Capacity Lithium-Ion battery delivers longer life and run-time
- Milwaukee 4-Pole Frameless Motor maximizes tool efficiency to increase run-time
- 1/2" single-sleeve ratcheting metal chuck with carbide jaws
- On-board Battery Fuel Gauge displays remaining run-time
- Built-in LED Light illuminates work surface
- Variable speed trigger
- Both Models Include: (2) 18V XC Lithium-Ion batteries, 18V charger, side handle and carrying case

SAWZALL® M18™ CORDLESS RECIP SAW TOOL KIT

2620-22

- 18V XC High Capacity Lithium-Ion battery delivers longer life and run-time
- 0–3200 SPM with 1" stroke length
- Designed to cut up to 30% faster with less vibration
- Lever Action QUIK-LOK™ blade clamp
- Battery fuel gauge displays remaining run-time
- Includes: (2) 18V XC high capacity Lithium-Ion batteries, 18V charger, (1) general purpose Sawzall® blade and carrying case

M18™ CORDLESS 1/4" HEX COMPACT IMPACT DRIVER

2650-22

- Compact design delivers 0–2,200 RPM and 1,400 in.–lbs. of torque
- 18V XC High Capacity Lithium-Ion battery
- 1/4" Hex Quick Change Chuck
- Milwaukee® Designed Impact Mechanism
- Milwaukee® 4-Pole Frameless Motor maximizes tool efficiency
- Battery Fuel Gauge displays remaining run-time
- Built-in LED Light illuminates work surface
- Includes: (2) 18V XC Lithium-Ion batteries, 1-Hour charger, belt clip and carrying case

M18™ CORDLESS 1/2" COMPACT IMPACT WRENCH

2652-22

- Compact enough to fit into tight spaces, yet delivers 2,200 in.-lbs. of torque
- Milwaukee® Designed Impact Mechanism delivers maximum application speed
- Milwaukee® 4-Pole Frameless Motor offers maximum efficiency and run-time
- 1/4" anvil pin detent for superior socket retention
- Built-In LED Light illuminates work surface
- Also compatible with the 18V Compact Lithium-Ion battery
- Includes: (2) XC High Capacity Lithium-Ion batteries, 1-Hour charger and carrying case

M18™ CORDLESS COMPACT DRILL DRIVER

2601-22

- 1/2 in. Ratcheting Chuck with plastic sleeve
- Heavy-Duty 2-Speed Metal Gear Box delivers 0-350/0-1,400 RPM
- Compact length at 7-3/4" and lightweight at only 4.0 lbs.
- Compact motor delivers 400 in.-lbs. of maximum torque
- Built-in LED light illuminates work surfaces
- Includes: 18V Lithium-Ion battery pack, 18V Lithium-Ion charger and 1/4" 3-Jaw keyless chuck

M18™ CORDLESS 1/2" HAMMER-DRILL DRIVER KIT

2602-22CT

- 0-450/0-1,700 RPM; 29,000 BPM.
- Milwaukee® 4-Pole Frameless Motor delivers 450 in.-lbs. of peak torque
- Compact & ergonomic design at only 8-1/2" in length
- Digital Power Management (DPM) overload protection prevents damage to the tool and battery
- All Metal Gear Case is the only metal gear case in its class
- All Metal 1/2" Single Sleeve Ratcheting Chuck: Provides maximum durability and bit retention
- Includes: (2) Compact Lithium-Ion batteries, 1-hr charger and kitbox

Headquarters
BRONX, NEW YORK
Ph: 718-299-6060 • Fx: 718-299-1593
Toll Free: 800-255-0910

V28™ LITHIUM-ION CORDLESS TOOLS

Powering the V28™ Series of cordless tools is the revolutionary 28 Volt Lithium-Ion battery pack exclusively from Milwaukee. The 28 Volt battery pack weighs less than an 18 Volt pack yet delivers two times the run-time. On certain models the battery can be inserted in the reverse position which allows for ultimate balance when working overhead or in hard to reach areas.

V28™ SAWZALL® RECIPROCATING SAW KIT

0719-21

- 0-2000/0-3000 SPM for metal or wood cutting
- Quik-Lok™ Blade Clamp for quick tool-free blade changes
- Gear Protecting Clutch for extreme durability
- Keyless Shoe Adjustment quickly adjusts blade depth
- Includes: (2) 28V Batteries, One Hour Charger, Carrying Case and (2) Super Sawzall® Blades

V28™ BAND SAW KIT

0729-21

- Variable speed trigger delivers optimal cutting speeds of 0-225/0-350 surface feet per minute
- Deep cut 4-3/4" x 4-3/4" capacity
- Worm Gear and Chain Drive
- Perfectly balanced with clear line of sight
- LED light aids in making cuts in dark places
- Includes: 28V Battery, One Hour Charger, Carrying Case and Band Saw Blade

V28™ METAL CUTTING SAW KIT

0740-22

- 28 Volt high power motor delivers 3,200 RPM
- 2-7/16" maximum depth of cut with electric brake
- Cuts all types of metals such as uni-strut, galvanized pipe, metal studs and black pipe, as well as Hardi-Plank and Durock materials
- Premium blade for smooth, burr free cutting
- LED light and clear guard provides an excellent line of sight
- Large tear drop and impact resistant window for clear line of sigh
- Includes: Carrying Case, One Hour Charger, (2) 28V Batteries, Circular Saw Blade, Rip Fence and Wrench

V28™ 1/2" IMPACT WRENCH KIT

0779-22

- Designed for heavy-duty use, the Milwaukee 0779 delivers 325 ft.lbs of maximum torque - the most of any cordless impact wrench
- Variable Speed: 0-1450 RPM, 0-2450 IPM
- Forward/Reverse shuttle is conveniently located
- Hanger Bracket with solid steel ring
- Magnesium Gearcase for added durability and lighter weight
- Includes: (2) 28V Batteries, One Hour Charger, Carrying Case, Hanger Bracket and Quick Change Detent Kit

V28™ LITHIUM-ION CORDLESS TOOLS

Powering the V28™ Series of cordless tools is the revolutionary 28 Volt Lithium-Ion battery pack exclusively from Milwaukee. The 28 Volt battery pack weighs less than an 18 Volt pack yet delivers two times the run-time. On certain models the battery can be inserted in the reverse position which allows for ultimate balance when working overhead or in hard to reach areas.

V28™ CORDLESS 1/2" HAMMER-DRILL KIT

0724-24

- 1/2" all-metal, single-sleeve, ratcheting chuck with all carbide jaws
- Enormous 600 in. lbs. of maximum torque and 0-600/0-1,800 rpm
- Comfortable non-slip, soft-grip handle reduces vibration and fatigu
- Exclusive Clip-Lok™ System attaches securely to the operator's belt or tool bags and easily releases with one hand
- Includes: (2) 28V Batteries, One Hour Charger, Carrying Case, Clip-Lok™ System, Side Handle and No. 2 Phillips Bit

V28™ COMPACT 1" SDS ROTARY HAMMER KIT

0756-22

- 28 Volt high power reversible motor delivers 4,700 BPM and 2.1 ft.-lbs. of impact energy
- Optimal drilling range in concrete is from 3/16" to 3/4" with a 1" solid bit capacity and 2-1/2" thin wall core bit capacity
- Three operating modes - hammer drill, drill only, and chipping
- Soft-grip handle and two finger reversible trigger for maximum comfort
- Includes: (2) 28V Batteries, One Hour Charger, Carrying Case, Side Handle and Depth Gauge

V28™ 4-PIECE COMBO KIT

- 1/2" Hammer-Drill with all-metal, single-sleeve, ratcheting chuck with all carbide jaws
- Sawzall® Recip Saw with 1-1/8 in. stroke length
- 6-1/2". Circular Saw cuts 2 x 4's at 45˚
- Work Light features a high intensity Xenon bulb
- Patented Clip-Lok™ System attaches securely to the operator's belt or tool bags and easily releases with one hand
- Includes: 28V Sawzall® Recip Saw, 28V Hammer-Drill, 28V Circular Saw, 28V Work Light, (2) 28V Batteries, One Hour Charger, No. 2 Phillips Bit, Two Sawzall® Blades, Circular Saw Blade, Rip Fence, Clip-Lok™ System and Contractor Bag

0928-29

Headquarters
BRONX, NEW YORK
Ph: 718-299-6060 • Fx: 718-299-1593
Toll Free: 800-255-0910

HITACHI® MITER SAWS

C12LSH - 12" SLIDING DUAL COMPOUND MITER SAW WITH LCD DISPLAY AND LASER MARKER

Named one of the Top10 Innovative Tools for 2006 by Workbench Magazine, Feb 2006

- Revolutionary compact slide system – saw head slides along fixed rails eliminating the need for rear clearance
- Top-mounted digital LCD scale swivels for clear miter and bevel readings from any angle
- Exclusive laser marker system from Hitachi increases cutting accuracy
- Powerful 15 Amp motor with 1,850 Watts of max output power for the toughest jobs
- Micro miter and micro bevel adjustment knobs to dial-in to precise angles
- Large pivoting fence raises fence height to 4-11/16 inches to cut crown molding vertically
- 57 Degree miter angle to the right and 46 Degree miter angle to the left
- Includes: 12 inch TCT Saw Blade, Dust Bag, Vice Assembly and Box Wrench

C12FCH - 12" COMPOUND MITER SAW WITH LASER MARKER

- 15 Amp motor with1, 950 Watts of max output power for the toughest cutting jobs
- Micro bevel adjustment for fine tuning bevel angles
- Horizontal handle with soft, vibration reducing elastomer grip
- Large pivoting fence raises fence height to 5-1/8" for cutting crown molding vertically
- Thumb actuated positive stops, for quick miter adjustments
- Includes: 12" TCT Saw Blade, Dust Bag, Vise Assembly, Box Wrench and Hex Bar Wrench

C10FSH - 10" SLIDING DUAL COMPOUND MITER SAW WITH LASER MARKER

- Unique, easily adjustable laser marker for precise cutting
- 12 Amp motor with intense power and Electronic soft start feature
- 57 Degree miter angle to the right and 45 Degree miter angle to the left
- Positive stops on miter and bevel scale for easy to read measurements and quick settings
- Linear ball bearing slide system, for superior accuracy and control
- Electronic speed control, maintains RPM while cutting
- Adjustable pivot fence broadly supports work piece
- Electric brake feature halts blade rotation within seconds
- Includes: Box Wrench and Dust Bag

C10FCE - 10" COMPOUND MITER SAW

- Powerful 15 Amp motor
- 0-52 Degree miter angle range, to the right and left
- 0-48 Degree bevel angle range, to the left with adjustable bevel stops
- Horizontal handle with soft, vibration reducing elastomer grip
- Large extended fence and large table
- Thumb actuated positive stops for quick miter adjustments
- Dust collector attachment, to minimize airborne particles
- Includes: 10" TCT Saw Blade, Extended Fence, Dust Bag, Vise Assembly, Box Wrench and Hex Bar Wrench

C10FSB - 10" SLIDING DUAL COMPOUND MITER SAW

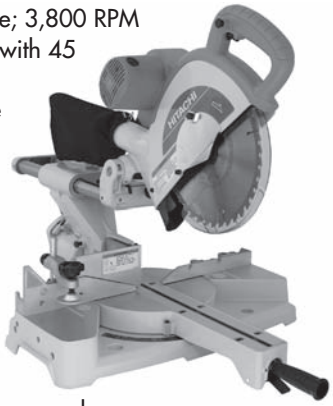

- 12 Amp motor with soft start feature; 3,800 RPM
- 57 Degree miter angle, to the right with 45 Degree miter angle to the left
- 45 Degree bevel angle range to the right and left
- Positive stops on miter and bevel scale for easy and quick settings
- Linear ball bearing slide system for superior accuracy and control
- Electronic speed control maintains RPM while cutting
- Electric brake halts blade rotation within seconds
- Dust collector attachment and splinter guard
- Includes: Box Wrench and Hex Bar Wrench

HITACHI® MITER SAW & RECIPROCATING SAWS

C8FSE - SLIDING COMPOUND MITER SAW

- 9.2 Amp motor; 5,500 RPM
- Electronic speed control for maximum control
- Positive miter stops to 15°, 22.5°, 31.6°, and 45° to the left and right
- Compound cuts with 48° bevel angle left and 5° bevel angle right
- Linear ball bearing slide system for superior accuracy and control
- Vertical handle with soft, vibration reducing elastomer grip
- Only 31 lbs. for lightweight portability
- Industry-leading 5-year warranty
- Includes: 8-1/2" TCT Saw Blade, Dust Bag, Vice Assembly, Box Wrench and Sub Fence

UU610 - UNIVERSAL WORK STATION

Compatible with all Hitachi miter saws featured in this catalog

- Heavy-duty aluminum construction, allows the beam to support up to 500lbs
- Patented cam lock mount, for "drop on" saw installation
- Fully adjustable 12" work supports can handle 20ft of work material
- Dual adjustable roller fences, aligns material with the saw
- Dual extension arms, accepts router and vise accessories
- Fully retractable length of only 4.5 ft., fits sideways in a pickup
- Lightweight at only 40 lbs. with wheel kit for easy portability

CR13V - RECIPROCATING SAW

- 10 Amp motor, intense power with electronic feedback power control
- Stroke length of 1-5/32 inches for efficient cutting performance
- Quick and easy blade changing system requiring no tools and one hand
- Reversible blade, mountable up or down for varied cutting methods
- Oversized trigger to improve manageability
- Lightweight design at 7.3 lbs. facilitates maneuverability and ease of use
- Adjustable pivot foot allows blade to pivot down to access hard to reach areas
- Triple sealed construction resists dust and water to increases tool life
- Includes: Heavy-Duty Carrying Case, All Purpose Blade and Hex Bar Wrench

CR13VBY - LOW VIBRATION RECIPROCATING SAW FEATURING UVP TECHNOLOGY

- Patented User Vibration Protection (UVP) technology incorporates a counterweight mechanism that reduces full-load tri-axial vibration by over 65%
- 2 AMP motor provides aggressive power thanks to 1370 Watts, resulting in a faster cutting speed
- Stroke length of 1-1/4" at 0-3,000 SPM with variable speed dial and trigger
- 2 mode cutting mechanism—straight mode and "swing" mode that produce significantly less rebound effect
- Tool-less blade change with a simple press of a lever for quick replacements
- Ergonomic shape and slip/heat resistant grip are easier to handle
- Includes: Heavy-Duty Carrying Case and 8" BIM All Purpose Blades (5pc.)

KASS
INDUSTRIAL SUPPLY CORP.
Headquarters
BRONX, NEW YORK
Ph: 718-299-6060 • Fx: 718-299-1593
Toll Free: 800-255-0910

HITACHI® JIG SAW, GRINDER & CORDLESS TOOLS

CJ120V - ELECTRONIC VARIABLE SPEED ORBITAL JIG SAW

- 5.8 Amp motor, intense power for the toughest woodworking jobs
- Electronic Speed Control Dial for optimized speed
- 4-stage orbital action with stroke length of 1"
- Multi-position switch to angle blade for beveled cuts
- Quick and easy no-tool blade changing system
- Splinter guard reduces work piece splintering
- Lightweight design at 5.1 lbs. facilitates maneuverability and ease of use
- Dust collector attachment minimizes airborne particles
- Non-slip Elastomer grip handle maximizes user comfort and control
- Includes: 3 Blades, Table Insert, Shutter, Dust Collector and Heavy-Duty Carrying Case

G12SE2 - 4-1/2" DISC GRINDER

- 9.5 Amp motor, forcible output power at 1,900W
- Large paddle switch, can lock-on or be controlled by user as needed
- Tool-less wheel guard, can be adjusted to desired angle
- Specially sealed armature coil, designed to reduce ingested debris
- Removable side handle, improves control and comfort
- Carbon brush access, allows user to replace brush as needed
- Lightweight design facilitates maneuverability
- Includes: Wrench, Side Handle and Depressed Center Wheel

DS14DVF3 - 14.4V CORDLESS 3/8" DRIVER DRILL KIT WITH FLASHLIGHT

- Compact and lightweight design (4.0 lbs) reduces user fatigue and fits easily into tight spaces
- Two-piece magnet motor produces 300 in/lbs. of torque to power through the toughest jobs
- 3/8" keyless chuck allows quick and easy bit changes
- Two-speed transmission controlled by a one-touch speed knob, allows for 0-400 or 0-1,200 RPM
- Belt hook with integrated bit holder saves time and adds convenience
- 1.4 Ah batteries allow for longer run time and fewer battery charges
- 22-stage clutch for high torque and/or precision driving
- Soft, non-slip elastomer grip for increased user comfort and safety
- Kit Includes: Flashlight, Two 1.4 Ah Batteries, Quick Charger, Carrying Case and Driver Bit

DS18DMR - 18V CORDLESS 1/2" DRIVER DRILL

- High performance, fan-cooled, rare-earth magnet motor for optimal performance
- Class leading 550in./lbs. of torque to power through the toughest jobs
- 2-piece rare-earth magnet motor for greater durability and increased performance
- 1/2" keyless chuck offers tool-free convenience
- 22-stage slip-clutch for precision screw driving
- Convenient 5-position belt hook features an integrated amber LED work light
- High capacity 3.0 Ah batteries allow for longer run time and fewer battery charges
- Non-slip Elastomer grip handle, maximizes user comfort and control
- Compact and lightweight design at 5.73 lbs. for maximum maneuverability
- Includes: Two 3.0Ah NiMH Batteries, 30 Min. Charger, Detachable Side Handle, Driver Bit and Injection molded carrying case

KETT

PORTABLE POWER SAW AND SHEARS

D-HANDLE PLUNGE MASTER SAW

The KS-23AM allows you to cut any desired depth through soft, rigid sheets and panels from zero to full 3/8" depth with 2" diameter and 5/8" with 2-1/2" diameter high-speed steel saw blades. This saw handles mild steel to 16 gauge; aluminum to 3/16"; and plastics to 1/2". Cuts are smooth and straight, so edges do not need finishing. Powered by a "D" handle, heavy duty industrial type 3/8" capacity 5.5 amp electric motor, the KS-23AM can handle the toughest jobs in the shop or at the job site.

KS-23AM

14 GAUGE POWER SHEAR

This lightweight, pistol-grip shear cuts 14 gauge mild steel and most grades of stainless to 18 gauge. Double-insulated, the KD-440 cuts at over 150 inches per minute, leaving a clean, flat sheet, ready to fabricate. Distortions are absorbed in an easily disposed of waste curl, leaving the sheet cool and free of burn, chips and burrs. The cutting blades are finest high-speed steel, which you can easily replace individually or in replacement blade kit #106.

KD-440

16 GAUGE VARIABLE-SPEED SHEAR

The KD-442 variable speed shear easily cuts through 16 gauge mild steel and stainless to 18 gauge. The steel shear head has close cutting heavy duty blades that quickly cut through sheet metal, spiral pipe, metal doors and metal studs. Double cutting action provides maximum sheet usage without burring or buckling the material.

KD-442

18 GAUGE POWER SHEAR

These double-cut shears feed quickly and quietly, without warping or bending your finished piece (distortion is in the waste strip). It easily follows a scribed line - edges are not hardened or burred, so you get maximum use of a sheet. The swiping action of blades seals the edge of coated metals. These shears cut sheet metal up to 18 gauge in straight or contour lines at 180 inches per minute and plastic or Formica up to 3/32" thick.

KD-200

Cat. No.	Motor	Cutting Capacity	Max RPM	Power Source	Length	Weight
KS-23AM	253-10	16 ga. mild steel / 1/2" plastic	1,500	120v / 5.5 amp	18"	12 lbs.
KD-440	253-59	14 ga. mild steel / 16 ga. stainless	2,500	120v / 5.0 amp	14-1/2"	5 lbs.
KD-442	253-59	16 ga. mild steel / 18 ga. stainless	2,500	120v / 5.0 amp	14-1/2"	5 lbs.
KD-200	253-55	18 ga. mild steel / 20 ga. stainless	2,500	120v / 5.0 amp	14"	4 lbs.

KASS
INDUSTRIAL SUPPLY CORP.
Headquarters
BRONX, NEW YORK
Ph: 718-299-6060 • Fx: 718-299-1593
Toll Free: 800-255-0910

DIAMOND PRODUCTS

WET DIAMOND CORE BITS

HEAVY DUTY ORANGE

The Heavy Duty Orange bit is the most popular bit.

It has a high diamond concentration for excellent footage and cutting speed.

Designed for all types of wet drilling in applications with light to moderate steel.

Go with Heavy Duty Orange for the best general purpose bit on the market.

Specifications

H33F
Hard Aggregate

HOL
General Purpose
Fast Cutting

H64L
Asphalt/Block, Long Life

SIZES

1″	4-1/2″
1-1/8″	5″
1-1/4″	5-1/2″
1-3/8″	6″
1-1/2″	6-1/4″
1-5/8″	6-1/2″
1-3/4″	7″
1-7/8″	8″
2″	9″
2-1/4″	10″
2-1/2″	12″
2-3/4″	14″
3″	16″
3-1/4″	18″
3-1/2″	20″
4″	24″
4-1/4″	

M-1 CORE RIG

THE #1 DRILL RIG IN AMERICA

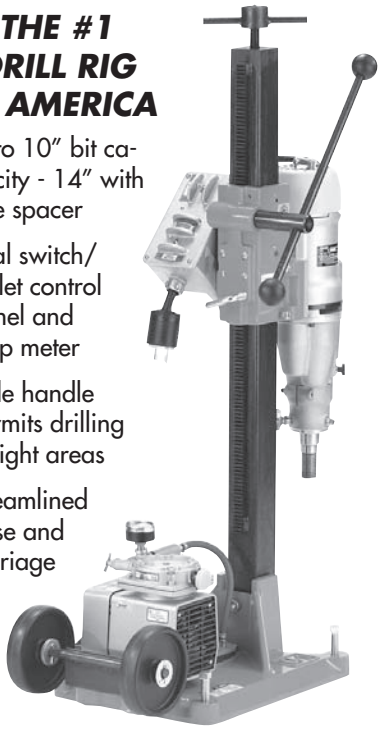

- 1″ to 10″ bit capacity - 14″ with one spacer
- Dual switch/ outlet control panel and amp meter
- Slide handle permits drilling in tight areas
- Streamlined base and carriage
- 2-1/2″ square column with black oxidized finish
- 6″ wheels for better mobility
- Quick changeover from vacuum to anchor base

M-4 CORE RIG

WITH PORTABLE WEKA DK-12 MOTOR

- 6″ bit capacity - 3″ handheld
- Weighs only 35 lbs. — rig -20 lbs., motor -15 lbs.
- Converts to hand held drill motor in seconds
- Combination stand quickly angles to 45°
- Reversible slide handle
- 3-Speed Weka DK-12 Drill Motor

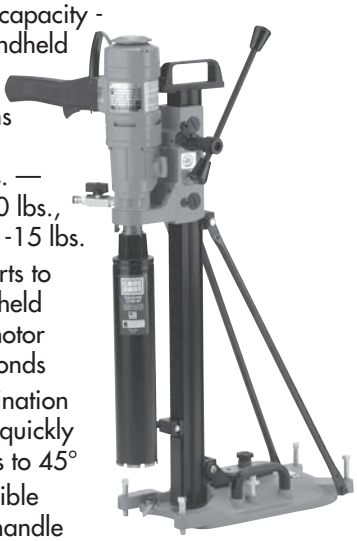

WEKA DK-12 Drill Motor

CC900T 10″ TILE SAW WITH FOLDING STAND & BLADE

- 10″ blade capacity
- 1-1/2 HP high torque motor
- Cut to 20″, Diagonal Cut to 14″
- Convenient carrying handles
- Removable stainless steel water tray
- Cutting table utilizes ball bearing wheels for smooth movement & accurate cutting
- Folding stand and one 10″ heavy duty tile blade included

DIAMOND PRODUCTS

CORE CUT DRY CUTTING BLADES AND SAWS

SPEEDICUT CUT OFF SAW

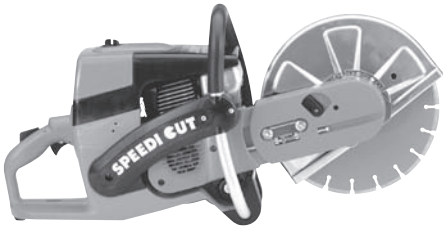

- Available in 12" and 14" blade capacity models
- 5-stage filtration system ensures a clean air supply to the carburetor for clean operation even under very dusty conditions
- Computerized ignition with digital timing control for easy starting, excellent 4,300 RPM blade control and consistent power
- Best power to weight ratio in the industry
- Light weight, balanced, portable and well designed for easy operation

CC1300XL CONCRETE SAW

- Extra sturdy handles adjustable to 4 positions for precise control doesn't rattle like other adjustable handles
- Through rear axle for added strength
- 6-5/8" maximum cutting depth with 18" blade guard
- Available with Honda gas or electric motor

HIGH SPEED SAW BLADES



- The most competitively-priced on the market
- Designed for fast, smooth cutting
- More constant depth of cut and far fewer blade changes compared to abrasive blades
- Great for cutting concrete, concrete curbing, brick or block walls, expansion joints, pre-cast and pre-stressed materials and more

AVAILABLE SIZES

10" x .110 x 1"	12" x .125 x UNV	14" x .110 x UNV	14" x .235 x 1"	18" x .125 x 1"
12" x .110 x UNV	12" x .235 x 1"	14" x .125 x UNV	16" x .125 x 1"	20" x .125 x 1"

TURBO BLADES

- Designed for use on right-angle grinders, high speed, portable electric, masonry & tile saws
- Advanced, high-density metal bond technology and high diamond concentration
- Patented slotted core makes these the coolest running dry blades on the market
- Long life and smooth cutting

AVAILABLE SIZES

4" x .080 x 7/8"	7" x .095 x 7/8"	10" x .110 x 1"	16" x .125 x 1"
4-1/2" x .080 x 7/8"	8" x .095 x 7/8"	12" x .125 x UNV	16" x .125 x 20MM
5" x .080 x 7/8"	9" x .095 x 7/8"	14" x .125 x UNV	20" x .140 x 1"
6" x .080 x 7/8"			

TUCK POINTING BLADES

- For use on hand-held circular saws and most right-angle grinders
- Diamond blade maintains a constant depth of cut with fewer blade changes than abrasive blades
- Provide fast, free cutting in concrete, block, marble, soft granite, stone, tile & other materials

AVAILABLE SIZES

4-1/2" x .250 x 7/8"	5" x .250 x 7/8"	7" x .250 x 7/8"	8" x .250 x 7/8"

DRY CONCRETE/ASPHALT BLADES

- For use on low horsepower walk behind saws
- For the contractor making intermittent cuts without water for patch/repair work or expansion joints
- .125 blades can be used on high speed saws

AVAILABLE SIZES

12" x .125 x 1"	12" x .187 x 1"	14" x .125 x 1"	14" x .187 x 1"

SMALL DIAMETER BLADES

- For use on hand held circular saws and most right-angle grinders
- Maintains a constant depth of cut
- Provides fast, free cutting in concrete, block, marble, soft granite, stone, tile and more

AVAILABLE SIZES

4" x .070 x 7/8"	5" x .080 x 7/8"	6" x .080 x 7/8"	8" x .080 x 7/8"
4-1/2" x .070 x 7/8"	5-1/2" x .080 x 7/8"	7" x .080 x 7/8"	9" x .080 x 7/8"

KASS
INDUSTRIAL SUPPLY CORP.
Headquarters
BRONX, NEW YORK
Ph: 718-299-6060 • Fx: 718-299-1593
Toll Free: 800-255-0910

UNITED ABRASIVES, INC.

SAIT

TYPE 27 - DEPRESSED CENTER GRINDING WHEELS





A24N - FAST GRINDING
- Fast Stock Removal • Aluminum Oxide Grain
- Use On all Ferrous Metals (Iron, Steel, Welds, Etc.)
- Excellent on Low Grade Stainless Steel

A24R - LONG LIFE
- Long Life • Aluminum Oxide Grain
- Use On all Ferrous Metals (Iron, Steel, Welds, Etc.)

C24N - CONCRETE
- Fast Stock Removal • Silicon Carbide Grain
- Use on Masonry, Concrete, Stone and Certain Cast Iron Applications

A Dia.	Size B Width	C Bore	Max RPM	Grades Available Catalog Numbers A24N	A24R	C24N
3	3/16	3/8	18,000	20001	—	—
3	1/4	3/8	18,000	20002	20005	—
4	3/16	3/8	13,500	20010	—	—
4	1/4	3/8	13,500	20012	20019	—
4	1/4	5/8	13,500	20015	20013	20017
4-1/2	3/16	7/8	13,300	20050	—	—
4-1/2	3/16	5/8-11	13,300	20150	—	—
4-1/2	1/4	7/8	13,300	20060	20063	20061
4-1/2	1/4	5/8-11	13,300	20160	20163	20161
5	1/4	7/8	12,200	20070	20073	20071
5	1/4	5/8-11	12,200	20170	20173	20171
6	1/4	7/8	10,200	20078	20079	—
6	1/4	5/8-11	10,200	20178	20076	—
7	1/4	7/8	8,500	20081	20080	20082
7	1/4	5/8-11	8,500	20085	20086	20087
9	1/4	7/8	6,600	20091	20090	20092
9	1/4	5/8-11	6,600	20095	20096	20097

TYPE 27 - DEPRESSED CENTER CUTTING WHEELS



A24R - GENERAL PURPOSE
- Excellent Cutting Capacity
- Aluminum Oxide Grain
- Use On all Ferrous Metals (Iron, Steel, Welds, Etc.)

C24R - CONCRETE
- Silicon Carbide Grain
- Use on Masonry, Concrete, Stone and Certain Cast Iron Applications

A Dia.	Size B Width	C Bore	Max RPM	Grades Available Catalog Numbers A24R	C24R
3	1/8	3/8	18,000	22000	—
4	1/8	3/8	13,500	22010	—
4	1/8	5/8	13,500	—	22017
4-1/2	3/32	7/8	13,300	22020	22025
4-1/2	3/32	5/8-11	13,300	22120	22125
5	3/32	7/8	12,200	22070	—
5	3/32	5/8-11	12,200	22170	—
5	1/8	7/8	12,200	—	22041
5	1/8	5/8-11	12,200	—	22141
6	1/8	7/8	10,200	22045	—
7	3/32	7/8	8,500	22056	—
7	3/32	5/8-11	8,500	22057	—
7	1/8	7/8	8,500	—	22050
7	1/8	5/8-11	8,500	—	22051
9	3/32	7/8	6,600	22066	—
9	3/32	5/8-11	6,600	22067	—
9	1/8	7/8	6,600	—	22060
9	1/8	5/8-11	6,600	—	22061

TYPE 1 - THIN HIGH SPEED CUT-OFF WHEELS

A60S - GENERAL PURPOSE
- Use with reusable 5/8-11 adaptor to fit angle grinders
- Thin .045 width • Extremely fast cutting with long life

A Dia.	Size B Width	C Bore	Max RPM	Cat. Number
4	.045	5/8	19,000	23099
4-1/2	.045	7/8	13,300	23101
5	.045	7/8	12,200	23103
6	.045	5/8	10,200	23105
6	.045	7/8	10,200	23106
7	.045	5/8	8,500	23107



- Use on Ferrous and/or Non-Ferrous Metals (Iron, Steel, Welds, Etc.)

UNITED ABRASIVES, INC.

SAIT

TYPE 1 PORTABLE SAW CUT-OFF WHEELS

C24R - CONCRETE

- Long Life
- External fiberglass reinforcement withstands offhand lateral pressure for added safety and controlled performance
- Use On Soft Aggregate Stone, Brick, Masonry, Concrete



A Dia.	Size B Width	C Bore	Max RPM	Catalog Number
6-1/2	3/32	5/8	10,500	23223
7	3/32	5/8	8,500	23235
8	3/32	7/8	7,500	23257
8	3/32	7/8	7,600	23259
9	7/8	5/8	6,600	23303

TYPE 1 PORTABLE SAW CUT-OFF WHEELS

A24R - GENERAL PURPOSE

- Long Life
- Use On Ferrous Metals (Steel, Angle Iron, Rebar, Etc.)

A30S - LONG LIFE

- Special aluminum oxide grain formula
- Fast, non-binding cutting
- Use On Ferrous Metal (Stainless Steel, High Tensile Alloys)

A Dia.	Size B Width	C Bore	Max RPM	Grades Available Catalog Numbers A24R	A30S
4-1/2	5/64	7/8	13,300	—	23102
4-1/2	3/32	7/8	13,300	23100	—
5	5/64	5/8	12,200	—	23226
5	5/64	7/8	12,200	—	23224
6-1/2	3/32	5/8	10,500	23222	—
7	5/64	5/8	8,500	—	23242
7	5/64	7/8	8,500	—	23240
7	3/32	5/8	8,500	23230	—
7	3/32	5/8	8,500	23234	—
7	3/32	7/8	8,500	23232	—
8	3/32	5/8	7,600	—	23246
8	3/32	5/8	7,600	23254	—
8	3/32	5/8	7,600	23258	—
8	3/32	7/8	6,600	23256	—
9	3/32	7/8	6,600	—	23248

TYPE 1 STATIONARY CUT-OFF WHEELS

A24N - FAST CUTTING

- General Purpose
- Fast Stock Removal
- Aluminum Oxide Grain
- Use On Ferrous Metals (Iron, Stainless Steel, Cast Iron, Etc.)

C24R - CONCRETE

- General Purpose, Long Life
- Silicon Carbide Grain
- Use On Masonry, Concrete, Brick, Stone, Etc.
- 14" and 16" Provided with Pinhole



A Dia.	Size B Width	C Bore	Max RPM	Grades Available Catalog Numbers A24N	A24R	A36R	C24R	C16
10	1/8	5/8	6,100	24001	24000	24002	24003	—
10	1/8	1	6,100	24005	24004	24006	24007	—
12	1/8	1	5,100	24021	24020	24022	24023	—
14	1/8	1	4,400	24041	24040	24042	24043	24045
16	5/32	1	3,800	24071	24070	24072	24073	—

TYPE 1 CHOP SAW WHEELS Stud King®

- Aluminum Oxide Grain
- General Purpose
- Fast, Cool Cutting
- Burr-Free Finish
- Use on Metal Studding, Thin Rebar, Light Gauge Metals



A Dia.	Size B Width	C Bore	Max RPM	Catalog Number
10	3/32	5/8	6,100	24035
12	3/32	1	5,100	24030
12	3/32	1	5,100	—
14	3/32	1	4,400	24050
14	3/32	1	4,400	—
14	3/32	1	4,400	—
16	3/32	1	3,700	24010
16	3/32	1	3,700	—

CAN'T FIND WHAT YOU'RE LOOKING FOR?
CALL US AND REQUEST ANY OF
OUR COMPLETE MANUFACTURERS CATALOGS.
THEY'RE FREE FOR THE ASKING!

Headquarters
BRONX, NEW YORK
Ph: 718-299-6060 • Fx: 718-299-1593
Toll Free: 800-255-0910

UNITED ABRASIVES, INC.

SAIT

LARGE CUP BRUSHES

- Available in the following wire types:
  - Crimped wire which has higher flexibility for light cleaning and removal, especially on irregular surfaces
  - Knot wire for low to medium flexibility and aggressive cutting action
- For fast cleaning of large surfaces

CRIMPED WIRE

Dia.	Size Wire	Arbor	Rows	Trim Length	Max RPM	Catalog No.
4	.020	5/8-11	Stainless	1-1/8″	9,000	09551
5	.020	5/8-11		1-1/2″	8,000	09552
5	.020	5/8-11		1-1/2″	8,000	09554
6	.020	5/8-11		1-1/2″	6.600	09553

KNOT WIRE

	4	.020	5/8-11	1	1-3/8″	9,000
03407						
	4	.020	5/8-11	1	Stainless*	9,000	03406
	6	.020	5/8-11	1	1-3/4″	6,600	03409
	6	.035	5/8-11	1	1-3/4″	6,600	03410
	6	.020	5/8-11	2	1-3/4″	6,000	03411
	6	.035	5/8-11	2	1-3/4″	6,000	03412
	6	.020	5/8-11	1	Stainless*	6,000	03413

*302 stainless steel wire used

SMALL CUP BRUSHES

- Available in the following wire types:
  - Crimped carbon steel wire for light cleaning and where greater flexibility is required
  - Knot wire for low to medium flexibility and aggressive cutting action
  - Stainless steel knot wire for use on stainless, aluminum, and high strength alloys

FOR USE ON SMALL GRINDERS

Dia.	Size Wire	Arbor	Wire Style	Material Type	Max. RPM	Catalog No.
2-3/4	.014	5/8-11	Knot	Carbon	12,500	03414
2-3/4	.014	M14 x 2.0	Knot	Carbon	12,500	03415
2-3/4	.014	M10 x 1.25	Knot	Carbon	12,500	03416
2-3/4	.014	M10 x 1.5	Knot	Carbon	12,500	03417
2-3/4	.014	1/2-13	Knot	Carbon	12,500	03418
2-3/4	.020	5/8-11	Knot	Carbon	12,500	03501
2-3/4	.020	M14 x 2.0	Knot	Carbon	12,500	03502
2-3/4	.020	M10 x 1.25	Knot	Carbon	12,500	03503
2-3/4	.020	M10 x 1.5	Knot	Carbon	12,500	03504
2-3/4	.020	1/2-13	Knot	Carbon	12,500	03505
2-3/4	.014	5/8-11	Knot	Stainless*	12,500	03419
2-3/4	.014	M14 x 2.0	Knot	Stainless*	12,500	03423
2-3/4	.014	M10 x 1.25	Knot	Stainless*	12,500	03422
2-3/4	.014	M10 x 1.5	Knot	Stainless*	12,500	03421
2-3/4	.014	1/2-13	Knot	Stainless*	12,500	03420
2-3/4	.020	5/8-11	Knot	Stainless*	12,500	03506
2-3/4	.020	M14 x 2.0	Knot	Stainless*	12,500	03507
2-3/4	.020	M10 x 1.25	Knot	Stainless*	12,500	03508
2-3/4	.020	M10 x 1.5	Knot	Stainless*	12,500	03509
2-3/4	.020	1/2-13	Knot	Stainless*	12,500	03510
2-3/4	.014	5/8-11	Crimped	Carbon	12,500	01401
2-3/4	.014	M14 x 2.0	Crimped	Carbon	12,500	01405
2-3/4	.014	M10 x 1.25	Crimped	Carbon	12,500	01404
2-3/4	.014	M10 x 1.5	Crimped	Carbon	12,500	01403
2-3/4	.014	1/2-13	Crimped	Carbon	12,500	01402
2-3/4	.014	5/8-11	Crimped	Stainless*	12,500	01408
3-1/2	.020	5/8-11	Knot	Carbon	12,500	03511
3-1/2	.020	5/8-11	Knot	Stainless*	12,500	03512
3-1/2	.014	5/8-11	Crimped	Carbon	12,500	03513
3-1/2	.014	5/8-11	Crimped	Stainless*	12,500	03514

*302 stainless steel wire used

Oldham Since 1857

CARBIDE CIRCULAR SAW BLADES

FRAMING COMBINATION

Cat. No.	Dia.	Teeth	Arbor
725-7424	7-1/4″	24	UNIV.

For fast cutoffs and rips in all types of wood, finished plywood and prefinished materials.

SMOOTH CUT COMBINATION

Smooth ripping and cross-cutting in all types of wood, finished plywood and prefinished materials.

Cat. No.	Dia.	Teeth	Arbor
725-7740	7-1/4″	40	UNIV.
800-7740	8″	40	UNIV.
825-7740	8-1/4″	40	UNIV.

PRECISION CUTOFF

Precision smooth cutting of wood, plywood, chipboard, paneling, marlite and pressboard.

Cat. No.	Dia.	Teeth	Arbor
725-7260	7-1/4″	60	UNIV.
100-7260	10″	60	5/8″
120-7260	12″	60	1″
140-7260	14″	60	25mm/1″
120-7980	12″	80	1″
140-7980	14″	80	25mm/1″

PLASTIC HARDWOODS

The ideal cutting saw when smooth, chip-free edges are demanded. Excellent for cutting all types of plastics, polystyrene, Plexiglas, Formica, and Corian.

Cat. No.	Dia.	Teeth	Arbor
725-P7260	7-1/4″	60	UNIV.
100-P7260	10″	60	5/8″
120-P7280	12″	80	1″

NAIL CUTTING

Cat. No.	Dia.	Teeth	Arbor
725-6814	7-1/4″	14	UNIV.

This heavy-gauge carbide is designed for tough cutting jobs such as: used lumber or flooring with embedded nails and concrete-coated forming material.

NONFERROUS METAL

Produces clean cuts in aluminum sheeting, tubing extrusions and nonferrous metals such as copper, brass, lead and magnesium.

Cat. No.	Dia.	Teeth	Arbor
725-P7540	7-1/4″	40	UNIV.
100-P7560	10″	60	5/8″
120-P7580	12″	80	1″
140-P7580	14″	80	25mm/1″
140-P72100	14″	100	25mm/1″
140-P75100	14″	100	25mm/1″
150-P75100	15″	100	1″
160-P75100	16″	100	25mm/1″

HEAVY DUTY CONSTRUCTION

Cuts most building materials, including tar paper, roofing, nails and nonferrous metals; also easily cuts pallets, landscape timbers and wood with embedded nails.

NOT recommended for use on multi-purpose cutoff saws, unless the saw has a guard that completely covers both the upper and lower halves of the blade.

Cat. No.	Dia.	Teeth	Arbor
120-7812	12″	12	1″
120-7824	12″	24	1″
140-7824	14″	24	1″

STEEL CIRCULAR SAW BLADES

ALUMINUM & PLASTICS

For cutting aluminum sheets, tubing, siding and other nonferrous metal such as copper, brass, etc. For cutting plastic tubing, Formica (unlaminated), vinyl siding, etc.

Cat. No.	Dia.	Teeth	Arbor
700-AP	7″	150	UNIV.
100-AP	10″	150	5/8″

FERROUS METAL

Cat. No.	Dia.	Teeth	Arbor
700-M	7″	16	UNIV.

Produces clean cuts in ferrous metals up to 1/8″ thick, including sheet metal, corrugated steel roofing and partition studding.

HOLLOW GROUND FAST SMOOTH FINISH

Designed to eliminate sanding. Hollow ground grinding provides plenty of clearance for very smooth cutting of the wood in any direction and rapid hand-feeding without gumming or overheating.

Cat. No.	Dia.	Teeth	Arbor
725-HG	7-1/4″	60	UNIV.
100-HG	10″	80	5/8″

HOLLOW GROUND PRECISE SMOOTH FINISH

Cat. No.	Dia.	Teeth	Arbor
725-HP	7-1/4″	156	UNIV.

For fast, smooth performance, this blade is hollow ground with a short, but strong tooth to throw sawdust clear of the cutting teeth. Ideal for refinished paneling, plywood and veneer.

KASS
INDUSTRIAL SUPPLY CORP.
Headquarters
BRONX, NEW YORK
Ph: 718-299-6060 • Fx: 718-299-1593
Toll Free: 800-255-0910

LENOX® RECIPROCATING SAW BLADES

Tuff Tooth™

5 Per Pack Cat. No.	Length x Width x Thickness Inches	Teeth Per Inch (25mm)	Application	Shape
20572-656R	6 x 3/4 x .050	6	Roughing-in work and nail-embedded wood - fast cutting - pipe, structural steel, stainless steel, non-ferrous metal: 3/16" and thicker	
20585-156R	12 x 3/4 x .050	6		
20582-956R	9 x 3/4 x .050	6		
20556-676RC	6 x 7/16 x .050	6		
20560-606R	6 x 3/4 x .035	6	Contour cutting in all woods, nail-embedded wood and composition materials	
20575-634R	6 x 3/4 x .050	4	Fast cutting for wood, composition materials, plastics and non-ferrous metal	
20562-610R	6 x 3/4 x .035	10	Extra fast cutting in thick, nail-free wood	
20580-810R	8 x 3/4 x .050	10	Nail-embedded wood, composition materials and plastics - pipe, carbon steel, stainless steel: 1/8"-1/4" Non-ferrous metal: 1/8"-1/2" thick	
20583-110R	12 x 3/4 x .050	10/14		
20520-314RC	3-5/8 x 5/16 x .035	14		
20550-414R	4 x 3/4 x .035	14		
20564-614R	6 x 3/4 x .035	14	Contour cutting in wood < 3/4" thick and in metal 3/32"-5/16" thick	
20552-418R	4 x 3/4 x .035	18	Pipe, structural steel, stainless steel: 3/32"-1/4" - non-ferrous metal: 3/32"-3/8" - hard rubber	
20566-618R	6 x 3/4 x .035	18		
20578-818R	8 x 3/4 x .035	18		
21510-118R	12 x 3/4 x .035	18	Structural steel, pipe, conduit, stainless steel: 1/16"-3/16" thick - non-ferrous metal: 1/16"-5/16"	
20521-318RC	3-5/8 x 5/16 x .035	18		
20554-424R	4 x 3/4 x .035	24		
20568-624R	6 x 3/4 x .035	24		
20579-824R	8 x 3/4 x .035	24		
20449-456RP	4 x 3/4 x .050	6	Contour cutting in metal: 1/16"-1/8"	
20570-636RP	6 x 3/4 x .050	6	All metals less than 1/8" thick - tubing, conduit, trim	
20577-850R	8 x 3/4 x .050	10/14		
20576-800RG	8 x 3/4 x .040	Med. Grit	For plaster, plaster board and lath bi-directional cutting Heavy-duty - extended life when cutting pipe, structural steel and stainless steel - fire and rescue Stainless steel: 3/16"-3/4" Master-Grit™ Super hard cutting edge cuts through cast iron, fiberglass, ceramic tile, clay pipe, stone, brick, plaster and marble	

MERCER ABRASIVES®
A DIVISION OF MERCER TOOL CORP.

PREMIUM SANDING BELTS

- Aluminum Oxide grain
- Resin on resin bond
- Butt-tape joint for bi-directional sanding
- X-weight cloth backing
- Unique open/closed coat design
- Resists heat and moisture
- Uniform finish
- Mylar splice for reversible action
- Fast cutting action of a closed coat with reduced loading of an open coat
- 10 belts per box / 10 boxes per case (100 belts)

Applications: Wood, metal, glass, plastic and stone

3" X 21"

Part No.	Grit/Wt.	Part No.	Grit/Wt.
106024	24X	106100	100X
106036	36X	106120	120X
106040	40X	106150	150X
106050	50X	106180	180X
106060	60X	106220	220X
106080	80X	106240	240X

3" X 24"

Part No.	Grit/Wt.	Part No.	Grit/Wt.
107024	24X	107100	100X
107036	36X	107120	120X
107040	40X	107150	150X
107050	50X	107180	180X
107060	60X	107220	220X
107080	80X	107240	240X

4" X 24"

Part No.	Grit/Wt.	Part No.	Grit/Wt.
110024	24X	110100	100X
110036	36X	110120	120X
110040	40X	110150	150X
110050	50X	110180	180X
110060	60X	110220	220X
110080	80X	110240	240X

BLACK DRYWALL PAPER SHEETS (4-3/16" X 11")

Silicon Carbide grain
Open coat
Resists loading
Fast cutting action
100 sheets per box / 10 boxes per case (1,000 sheets)

Applications: Sanding drywall, plaster, and joints

Part No.	Grit/Wt.
245060	60D
245080	80D
245100	100D
245120	120D
245150	150D
245180	180D
245220	220D

DRYWALL SANDSCREEN SHEETS (4-1/8" X 11")

Silicon Carbide grain
Open-coat Screen
Resists loading
Fast cutting action
Long-lasting; wash and reuse
25 sheets per box / 10 boxes per case (250 sheets)

Applications: Sanding drywall, plaster, and joints

Part No.	Grit/WT
250080	80
250100	100
250120	120
250150	150
250180	180
250220	220

KASS
INDUSTRIAL SUPPLY CORP.
Headquarters
BRONX, NEW YORK
Ph: 718-299-6060 • Fx: 718-299-1593
Toll Free: 800-255-0910

Joran®
ROTO/PERCUSSION CARBIDE DRILL BITS

Diameter Ø		Total Length		Shank	Cat. No. Industrial Finish In Tubes
1/8″	X	2″	X	1/8″	JRP-1A
1/8″	X	3″	X	1/8″	JRP-1
5/32″	X	3-1/8″	X	5/32″	JRP-2
5/32″	X	6″	X	5/32″	JRP-2A
11/64″	X	3-1/4″	X	11/64″	JRP-3
3/16″	X	3-1/2″	X	3/16″	JRP-4
3/16″	X	6″	X	3/16″	JRP-5
13/64″	X	3-3/4″	X	13/64″	JRP-6
7/32″	X	3-3/4″	X	7/32″	JRP-7
15/64″	X	4″	X	15/64″	JRP-8
1/4″	X	4-1/8″	X	1/4″	JRP-9
1/4″	X	6″	X	1/4″	JRP-10
1/4″	X	13″	X	1/4″	JRP-11
1/4″	X	16″	X	1/4″	JRP-12
1/4″	X	20″	X	1/4″	JRP-13
1/4″	X	24″	X	1/4″	JRP-14
1/4″	X	48″	X	1/4″	JRP-15
9/32″	X	4-3/8″	X	1/4″	JRP-16
9/32″	X	6″	X	1/4″	JRP-17
5/16″	X	4-3/4″	X	5/16″	JRP-18
5/16″	X	4-3/4″	X	1/4″	JRP-19
5/16″	X	6″	X	5/16″	JRP-20
5/16″	X	6″	X	1/4″	JRP-21
5/16″	X	13″	X	5/16″	JRP-22
5/16″	X	13″	X	1/4″	JRP-23
5/16″	X	16″	X	5/16″	JRP-24
5/16″	X	16″	X	1/4″	JRP-25
5/16″	X	20″	X	5/16″	JRP-26
5/16″	X	20″	X	1/4″	JRP-27
5/16″	X	24″	X	5/16″	JRP-28
5/16″	X	24″	X	1/4″	JRP-29
3/8″	X	4-1/2″	X	3/8″	JRP-29A
3/8″	X	4-1/2″	X	1/4″	JRP-29B
3/8″	X	6″	X	3/8″	JRP-30
3/8″	X	6″	X	1/4″	JRP-31

Diameter Ø		Total Length		Shank	Industrial Finish In Tubes
3/8″	X	13″	X	3/8″	JRP-32
3/8″	X	13″	X	1/4″	JRP-33
3/8″	X	16″	X	3/8″	JRP-34
3/8″	X	16″	X	1/4″	JRP-35
3/8″	X	20″	X	3/8″	JRP-36
3/8″	X	20″	X	1/4″	JRP-37
3/8″	X	24″	X	3/8″	JRP-38
3/8″	X	24″	X	1/4″	JRP-39
3/8″	X	48″	X	3/8″	JRP-40
7/16″	X	6-1/4″	X	3/8″	JRP-41
7/16″	X	6-1/4″	X	1/4″	JRP-42
7/16″	X	20″	X	3/8″	JRP-43
7/16″	X	20″	X	1/4″	JRP-44
1/2″	X	6-3/4″	X	1/2″	JRP-45
1/2″	X	6-3/4″	X	3/8″	JRP-46
1/2″	X	6-3/4″	X	1/4″	JRP-47
1/2″	X	13″	X	1/2″	JRP-48
1/2″	X	13″	X	3/8″	JRP-49
1/2″	X	13″	X	1/4″	JRP-50
1/2″	X	16″	X	1/2″	JRP-51
1/2″	X	16″	X	3/8″	JRP-52
1/2″	X	16″	X	1/4″	JRP-53
1/2″	X	20″	X	1/2″	JRP-54
1/2″	X	20″	X	3/8″	JRP-55
1/2″	X	20″	X	1/4″	JRP-56
1/2″	X	24″	X	1/2″	JRP-57
1/2″	X	24″	X	3/8″	JRP-58
1/2″	X	24″	X	1/4″	JRP-59
1/2″	X	48″	X	3/8″	JRP-60
9/16″	X	7″	X	3/8″	JRP-61
5/8″	X	6″	X	1/2″	JRP-62
5/8″	X	6″	X	3/8″	JRP-63
5/8″	X	13″	X	1/2″	JRP-64
5/8″	X	13″	X	3/8″	JRP-65

Diameter Ø		Total Length		Shank	Industrial Finish In Tubes
5/8″	X	16″	X	1/2″	JRP-66
5/8″	X	20″	X	1/2″	JRP-67
5/8″	X	20″	X	3/8″	JRP-68
5/8″	X	24″	X	1/2″	JRP-69
5/8″	X	40″	X	1/2″	JRP-69A
11/16″	X	10″	X	1/2″	JRP-70
3 /4″	X	6″	X	1/2″	JRP-71
3/4″	X	6″	X	3/8″	JRP-72
3/4″	X	13″	X	1/2″	JRP-73
3/4″	X	13″	X	3/8″	JRP-74
3/4″	X	16″	X	1/2″	JRP-75
3/4″	X	20″	X	1/2″	JRP-76
3/4″	X	20″	X	3/8″	JRP-77
3/4″	X	24″	X	1/2″	JRP-78
27/32″	X	6″	X	1/2″	JRP-79
7/8″	X	6″	X	1/2″	JRP-80
7/8″	X	13″	X	1/2″	JRP-81
7/8″	X	16″	X	1/2″	JRP-82
7/8″	X	20″	X	1/2″	JRP-83
7/8″	X	24″	X	1/2″	JRP-84
1″	X	6″	X	1/2″	JRP-85
1″	X	13″	X	1/2″	JRP-86
1″	X	16″	X	1/2″	JRP-87
1″	X	20″	X	1/2″	JRP-88
1″	X	24″	X	1/2″	JRP-89
1-1/8″	X	6″	X	1/2″	JRP-90
1-1/8″	X	13″	X	1/2″	JRP-91
1-1/4″	X	3″	X	1/2″	JRP-92
1-1/4″	X	13″	X	1/2″	JRP-93
1-3/8″	X	6″	X	1/2″	JRP-94
1-3/8″	X	13″	X	1/2″	JRP-95
1-1/2″	X	6″	X	5/8″	JRP-96
1-1/2″	X	13″	X	5/8″	JRP-97
1 5/8″	X	6″	X	5/8″	JRP-98
1-5/8″	X	13″	x	5/8″	JRP-99

IRWIN SPEEDBOR® 6″ WOOD BORING BITS

- General purpose length
- Fits all drills and 1/4″ Quick-Change Holders
- Hang hole for convenient tool storage in workshops

Cat. No. Carded	Diameter
88804	1/4″
88805	5/16″
88806	3/8″
88807	716″
88808	1/2″
88809	9/16″
88810	5/8″
88811	11/16″
88812	3/4″

Cat. No. Carded	Diameter
88813	13/16″
88814	7/8″
88815	15/16″
88816	1″
88818	1-1/8″
88820	1-1/4″
88822	1-3/8″
88824	1-1/2″

HAWERA

VIX BITS

For accurately centering drilling holes for Hinges, Striker Plates Door Butts, Window Pulls and hardware using screws.

Cat. No.	Size	Diameter	Screws Size	Description
63350	#3	5/64	#3, #4	1/4 shank
63359	#5	7/64	#5, #6	1/4 shank
63360	#9	9/64	#8, #9, #10	1/4 shank
63352	#12	11/64	#12	1/4 shank
63354	#14	13/64	#14, #16	1/4 shank

CHAMPION® CUTTING TOOLS

SURFACE TREATED JOBBER DRILLS
LIST NO. 705 - (LIST NO. 405 BRIGHT FINISH)

Surface treated jobber drills feature a 118° point and are designed for general purpose drilling of a range of materials including steel, iron & iron castings. Available with bright finish for drilling soft ductile materials such as aluminum.

List/Size	Dec. Equiv.
705-80	.0135
705-79	.0145
705-1/64	**.0156**
705-78	.0160
705-77	.0180
705-76	.0200
705-75	.0210
705-74	.0225
705-73	.0240
705-72	.0250
705-71	.0260
705-70	.0280
705-69	.0292
705-68	.0310
705-1/32	**.0312**
705-67	.0320
705-66	.0330
705-65	.0350
705-64	.0360
705-63	.0370
705-62	.0380
705-61	.0390
705-60	.0400
705-59	.0410
705-58	.0420
705-57	.0430
705-56	.0465
705-3/64	**.0469**
705-55	.0520
705-54	.0550
705-53	.0595
705-1 /16	**.0625**
705-52	.0635
705-51	.0670
705-50	.0700
705-49	.0730
705-48	.0760

List/Size	Dec. Equiv.
705-5/64	**.0781**
705-47	.0785
705-46	.0810
705-45	.0820
705-44	.0860
705-43	.0890
705-42	.0935
705-3/32	**.0938**
705-41	.0960
705-40	.0980
705-39	.0995
705-38	.1015
705-37	.1040
705-36	.1065
705-7/64	**.1094**
705-35	.1100
705-34	.1110
705-33	.1130
705-32	.1160
705-31	.1200
705-1/8	**.1250**
705-30	.1285
705-29	.1360
705-28	.1405
705-9/64	**.1406**
705-27	.1440
705-26	.1470
705-25	.1495
705-24	.1520
705-23	.1540
705-5/32	**.1562**
705-22	.1570
705-21	.1590
705-20	.1610
705-19	.1660
705-18	.1695

List/Size	Dec. Equiv.
705-11 /64	**.1719**
705-17	.1730
705-16	.1770
705-15	.1800
705-14	.1820
705-13	.1850
705-3/16	**.1875**
705-12	.1890
705-11	.1910
705-10	.1935
705-9	.1960
705-8	.1990
705-7	.2010
705-13/64	**.2031**
705-6	.2040
705-5	.2055
705-4	.2090
705-3	.2130
705-7/32	**.2188**
705-2	.2210
705-1	.2280
705-A	.2340
705-15/64	**.2344**
705-B	.2380
705-C	.2420
705-D	.2460
705-1/4/E	**.2500**
705-F	.2570
705-G	.2610
705-17/64	**.2656**
705-H	.2660
705-1	.2720
705-J	.2770
705-K	.2810
705-9/32	**.2812**
705-L	.2900
705-M	.2950

List/Size	Dec. Equiv.
705-19/64	**.2969**
705-N	.3020
705-5/16	**.3125**
705-0	.3160
705-P	.3230
705-21/64	**.3281**
705-Q	.3320
705-R	.3390
705-11/32	**.3438**
705-S	.3480
705-T	.3580
705-23/64	**.3594**
705-U	.3680
705-3/8	**.3750**
705-V	.3770
705-W	.3860
705-25/64	**.3906**
705-X	.3970
705-Y	.4040
705-13/32	**.4062**
705-Z	.4130
705-27/64	**.4219**
705-7/16	**.4375**
705-29/64	**.4531**
705-15/32	**.4688**
705-31/64	**.4844**
705-1/2	**.5000**

#80 thru L, 12 per pack;
M thru 1/2, 6 per pack

ALSO AVAILABLE:
HEAVY DUTY 135° SPLIT POINT SCREW MACHINE DRILLS (STUBBIES)
COBALT and TITANIUM BITS
TAPER LENGTH IN FRACTIONAL SIZES

ITM DRILL SETS

GENERAL PURPOSE HIGH SPEED STEEL DRILL SETS

DRILL SETS IN METAL INDEX CASES

202HS0013 - 13 INDEX
Consists of 13 fractional size drills from 1/16″ through 1/4″ by 64ths

202HS0015 - 15 INDEX
Consists of 15 fractional size drills from 1/16″ through 1/2″ by 64ths

202HS0029 - 29 INDEX
Consists of 29 fractional size drills from 1/16″ through 1/2″ by 64ths

DRILL SETS IN PLASTIC INDEX CASES

202PL0013
13 Piece set
1/16″ to 1/4″ by 64ths

202DL0013
13 Piece set
1/16″ to 1/4″ in dial round case



Headquarters
BRONX, NEW YORK
Ph: 718-299-6060 • Fx: 718-299-1593
Toll Free: 800-255-0910

ITM

INDUSTRIAL SCREWDRIVER BITS

1/4" HEX SHANK PHILLIPS® POWER BITS

Cat. No.	Point Size	x	Length
T3-050-01	#1	x	2"
T3-070-01	#1	x	2-3/4"
T3-075-01	#1	x	3"
T3-090-01	#1	x	3-1/2"
T3-100-01	#1	x	4"
T3-125-01	#1	x	5"
T3-150-01	#1	x	6"
T3-050-02	#2	x	2"
T3-070-02	#2	x	2-3/4"
T3-075-02	#2	x	3"
T3-090-02	#2	x	3-1/2"
T3-100-02	#2	x	4"
T3-125-02	#2	x	5"
T3-150-02	#2	x	6"
T3-050-03	#3	x	2"
T3-070-03	#3	x	2-3/4"
T3-075-03	#3	x	3"
T3-090-03	#3	x	3-1/2"
T3-100-03	#3	x	4"
T3-125-03	#3	x	5"
T3-150-03	#3	x	6"

1/4" HEX SHANK STAR INSERT BITS FOR TORX® SCREWS

Cat. No.	Point Size	x	Length
TT-025-10	T10	x	1"
TT-025-15	T15	x	1"
TT-025-20	T20	x	1"
TT-025-25	T25	x	1"
TT-025-27	T27	x	1"
TT-025-30	T30	x	1"
TT-025-40	T40	x	1"

ALSO AVAILABLE
TORX® TAMPER RESISTANT INSERT BITS
TORX® WITH PIN

1/4" HEX SHANK SLOTTED INSERT BITS

Cat. No.	Point Size	x	Length	Blade Thickness Inch	Blade Thickness mm	Blade Width Inch	Blade Width mm
ST-025-04	#4-5	x	1"	.034	.86	3/16	4.8
ST-025-08	#6-8	x	1"	.040	1.02	7/32	5.6
ST-025-01	#8-10	x	1"	.042	1.07	1/4	6.4
ST-025-12	#10-12	x	1"	.046	1.17	9/32	6.4

1/4" HEX SHANK SPANNER TAMPER RESISTANT INSERT BITS

Cat. No.	Point Size	x	Length
SP-025-06	#6	x	1"
SP-025-08	#8	x	1"
SP-025-10	#10	x	1"
SP-025-12	#12	x	1"
SP-025-14	#14	x	1"

DEWALT

1/4" HEX SHANK PHILLIPS® REDUCED BODY INSERT BITS FOR DRYWALL

Cat. No.	Point Size	x	Length
1PR	#1	x	1"
2PR	#2	x	1"

1/4" HEX SHANK SQUARE RECESS INSERT BITS

Cat. No.	Point Size	x	Length
950-1	#1	x	1"
950-2	#2	x	1"
950-3	#3	x	1"